SERVICE MANUAL 2385

marantz

model 2385

Stereophonic Receiver

marantz

TABLE OF CONTENTS

Section	Title	Page
1.	P.W. BOARDS	1
2.	TEST EQUIPMENT REQUIRED FOR SERVICING	2
3.	AM ALIGNMENT PROCEDURES	2
3.1	AM IF Alignment	2
3.2	AM Frequency Range and Tracking Alignment	2
3.3	AM Signal Strength Meter Alignment	2
4.	FM ALIGNMENT PROCEDURES	2
4.1	FM Frequency Range and Tracking Alignment	2
4.2	Stereo Separation Alignment	3
4.3	Muting Circuit Alignment	3
4.4	Dolby FM Tape Output Setting	4
5.	AUDIO ADJUSTMENT	4
6.	VOLTAGE CONVERSION FOR EUROPEAN MODEL	4
7.	DIAGRAMS	6
7.1	Block Diagram	6
7.2	Connection Diagram - U.S.A. & Canada	8
7.3	Connection Diagram - Europe	10
8.	SCHEMATIC DIAGRAMS AND COMPONENT LOCATIONS	12
8.1	FM Front End Circuit Board P100	12
8.2	AM Tuner, FM IF & MPX Stereo Decoder Circuit Board P200	13
8.3	FM Noise Amp Circuit Board PB00	16
8.4	FM Buffer Amp Circuit Board PC00	16
8.5	Phono Amp & Selector Switch Circuit Board P400	17
8.6	Power Supply Circuit Board P850	18
8.7	Main Amp & Peak Indicator Circuit Board P700	19
8.8	Pre & Tone Amp Circuit Board PE00	22
8.9	Dolby NR Socket Circuit Board PK00	24
8.10	Audio Muting Circuit Board PN00	24
8.11	Soft Start Circuit Board PQ00	24
8.12	Tape Copy, Tape Monitor, MPX Noise Filter & Multipath Switches Circuit Board PS00	25
8.13	Dubbing In & Out Jacks Circuit Board PV00	25
8.14	Filter Amp Circuit Board PT00	26
8.15	Speaker System Switch & Attenuator Circuit Board PW00	26
8.16	Peak & Function Indicator LED Circuit Board PY00	27
8.17	Dial Lamp Circuit Board PZ00	27
9.	MAJOR COMPONENT LOCATIONS	28
9.1	Cabinet - Front View - U.S.A. & Canada	28
9.2	Chassis - Top View - U.S.A. & Canada	28
9.3	Cabinet - Rear View - U.S.A. & Canada	29
9.4	Chassis - Bottom View - U.S.A. & Canada	29
9.5	Cabinet - Front View - Europe	30
9.6	Chassis - Top View - Europe	30
9.7	Cabinet - Rear View - Europe	31
9.8	Chassis - Bottom View - Europe	31
10.	EXPLODED VIEWS	32
10.1	Front Panel Exploded View	32
10.2	Chassis Exploded View	34
10.3	Rear Panel Exploded View - Europe	36
10.4	Packing Material Exploded View	37

11. PARTS LIST 38

12. TECHNICAL SPECIFICATIONS 53

13. SCHEMATIC DIAGRAMS 55

INTRODUCTION

This service manual was prepared for use by Authorized Warranty Stations and contains service information for Marantz Model 2385 Stereophonic Receiver.

Servicing information and voltage data included in this manual are intended for use by the knowledgeable and experienced technician only. All instructions should be read carefully. No attempt should be made to proceed without a good understanding of the operation of the receiver.

The parts list furnishes information by which replacement parts may be ordered from the Marantz Company. A simple description is included for parts which can usually be obtained through local suppliers.

1. P.W. BOARDS

As can be seen from the circuit diagram the chassis of Model 2385 consists of the following units. Each unit mounted on a printed circuit board is described within the square enclosed by a bold dotted line on the circuit diagram.

1. FM Front End . . . . . mounted on P.W. Board P100
2. AM Tuner, FM IF & MPX Stereo Decoder . . . . . mounted on P.W. Board P200
3. FM Noise Amp . . . . . mounted on P.W. Board PB00
4. FM Buffer Amp . . . . . mounted on P.W. Board PC00
5. Phono Amp & Selector Switch . . . . . mounted on P.W. Board P400
6. Main Amp & Peak Indicator . . . . . mounted on P.W. Board P700
7. Power Supply . . . . . mounted on P.W. Board P850
8. Pre & Tone Amp . . . . mounted on P.W. Board PE00
9. Dolby NR Socket . . . . mounted on P.W. Board PK00
10. Audio Muting . . . . . mounted on P.W. Board PN00
11. Soft Start . . . . . mounted on P.W. Board PQ00
12. Tape Copy, Tape Monitor, MPX Noise Filter & Multipath Swithces . mounted on P.W. Board PS00
13. Filter Amp . . . . . mounted on P.W. Board PT00
14. Dubbing In & Out Jacks . . . . . mounted on P.W. Board PV00
15. Speaker System Switch & Attenuator . . . . . mounted on P.W. Board PW00
16. Peak & Function Indicator LED . . . . . mounted on P.W. Board PY00
17. Dial Lamp . . . . . mounted on P.W. Board PZ00

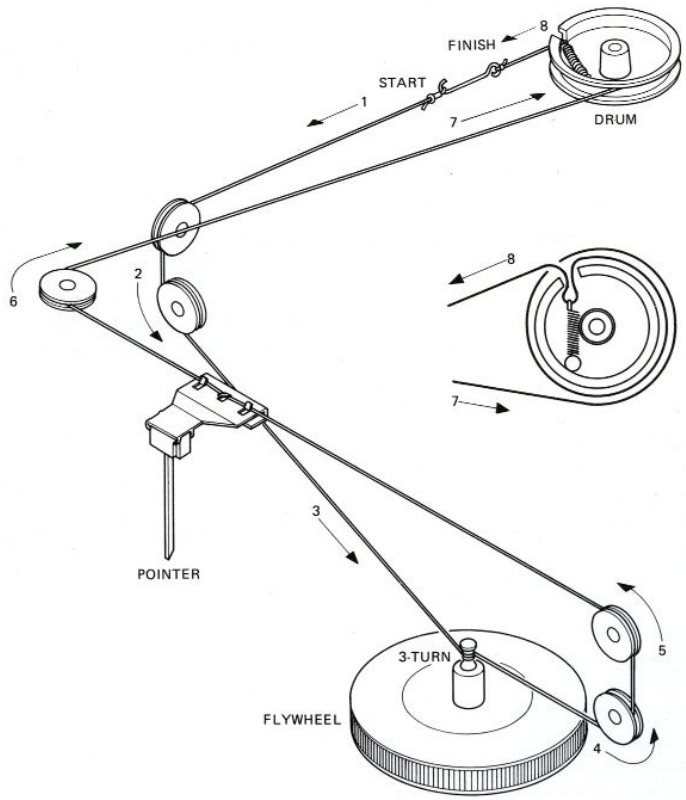

Figure 1. Dial Stringing

2. TEST EQUIPMENT REQUIRED FOR SERVICING

This table lists the test equipment required for servicing the Model 2385 Receiver.

Item	Manufacturer and Model No.	Use
AM Signal Generator		Signal source for AM alignment
Test Loop		Use with AM Signal Generator
FM Signal Generator MPX Signal Generator	Sound Technology Model 1000A	Signal source for FM alignment Stereo separation alignment and trouble shooting
Distortion Analyzer Audio Oscillator AC VTVM	Sound Technology Model 1700A	Distortion measurements Sinewave and squarewave signal source Voltage measurements (AC)
Oscilloscope	Tektronix Model T932 Philips Model 3232	Waveform analysis and trouble shooting and ASO alignment
Frequency Counter	Fluke Model 1900A	MPX Oscillator adjustment (VCO)
Circuit Tester		Trouble shooting
DC VTVM	Fluke Model 8000 "Digital" Simpson Model 313, Triplet Model 801	Voltage measurements (DC)
AC Wattmeter	Simpson Model 1379	Monitors primary power to amplifier
AC Ammeter	Commercial Grade (1-10A)	Monitors amplifier output under short circuit condition
Line Voltmeter	Simpson Model 1359	Monitors potential of primary power to amplifier
Variable Autotransformer	Superior Electronic Co., Powerstat Model 116B–10A	Adjusts level of primary power to amplifier
Shorting Plug	Use phono plug with 600-ohm across center pin and shell	Shorts amplifier input to eliminate noise pickup
Output Load (8 ohms, 0.5%, 200 W)	Commercial Grade	Provides 8-ohm load for amplifier output termination
Output Load (4 ohms, 0.5%, 300 W)	Commercial Grade	Provides 4-ohm load for amplifier output termination

3. AM ALIGNMENT PROCEDURES

3.1 AM IF ALIGNMENT

1. Connect a sweep generator to the J229 and an alignment scope to the test point B.
2. Rotate each core of IF transformers L153 and L154 for maximum height and flat top symmetrical response.

3.2 AM FREQUENCY RANGE AND TRACKING ALIGNMENT

1. Set AM signal generator to 515 kHz. Turn the tuning capacitor fully closed (place the tuning pointer at the low end) and adjust the oscillator coil L152 for maximum audio output.
2. Set the signal generator to 1650 kHz. Place the tuning pointer in the high frequency and an adjust the oscillator trimmer on the oscillator tuning capacitor for maximum audio output.
3. Repeat steps 1 and 2 until no further adjustment is necessary.
4. Set the generator to 600 kHz and tune the receiver to the same frequency and adjust a slug core of AM ferrite-rod antenna L002 and RF coil L151 for maximum output.
5. Set the generator to 1400 kHz and tune the receiver to the same frequency and adjust both trimming capacitors of antenna and RF tuned circuit for maximum output.
6. Repeat steps 4 and 5 until no further adjustment is necessary.

NOTE: During tracking alignment reduce the signal generator output as necessary to avoid AGC action.

3.3 AM SIGNAL STRENGTH METER ALIGNMENT

Set an AM signal generator to 1000 kHz at 5 kμV, and adjust R163 so that the signal strength meter may read 80% of the full scale.

4. FM ALIGNMENT PROCEDURES

4.1 FM FREQUENCY RANGE AND TRACKING ALIGNMENT

1. Connect an FM signal generator to the FM ANTENNA terminals and an oscilloscope and an audio distortion analyzer to the TAPE MONITOR OUT jacks on the rear panel.

2. Set the signal generator to 87.4 MHz and provide about 3 to 5 μV. Place the tuning pointer at the low frequency end by rotating the tuning knob and adjust the core of oscillator coil L106 to obtain maximum audio output.
3. Set the signal generator to 109 MHz and provide about 3 to 5 μV output. Rotate the tuning knob and place the tuning pointer at the high frequency end and adjust the trimming capacitor C123 for maximum output.
4. Repeat steps 2 and 3 until no further adjustment is necessary.
5. Set the signal generator to 90 MHz and tune the receiver to the same frequency. Decrease signal generator output until the audio output level decreases with the decreasing generator output. Adjust the antenna coil L101, RF coils L102, L103 and L104 and IF transformer L105 for minimum audio distortion.
6. Set the signal generator to 106 MHz and tune the receiver to the same frequency. Adjust the trimming capacitors CF01, CF02, CF03 and CF04 for minimum distortion.
7. Repeat steps 5 and 6 until no further adjustment is necessary.
8. Adjust the secondary core (upper) of discriminator transformer L201 so that the center tuning meter pointer indicates its center at no signal applied. Set the FM signal generator to 98 MHz and increase its output level 1 kμV and tune the receiver to the same frequency so that the center tuning meter pointer indicates its center. Adjust the primary core (lower) of L201 for minimum distortion.
9. Set the signal generator to 98 MHz at 1000 kμV, and adjust R278 so that the signal strength meter may read 90% of the full scale.

4.2 STEREO SEPARATION ALIGNMENT

1. Set the FM signal generator to provide 1 kμV at 98 MHz. Tune the receiver to the same frequency so that the center tuning meter pointer indicates its center.
2. Turn the signal generator modulation off (with the pilot signal turned off), connect a frequency counter to test point J238, and adjust R310 so that the frequency counter may precisely read 19 kHz.
3. Modulate the signal generator with stereo composite signal consisting only of subchannel signal (of course a pilot signal must be included).
4. Adjust the trimming resistor R319 for maximum and same separation in both channels.

4.3 MUTING CIRCUIT ALIGNMENT

1. Set the FM signal generator to provide 6 μV at 98 MHz and tune the receiver to the same frequency correctly.
2. Depress the FM MUTING pushswitch. Set R001 to MIN position (counterclockwise). Adjust R330 until the muting circuit is activated to produce output for exactly 6 μV input.
3. In turn increase the FM signal generator output up to 50 μV.
4. Set R001 to MAX position (clockwise). Adjust R347 until the muting circuit is activated to produce output for exactly 50 μV input.

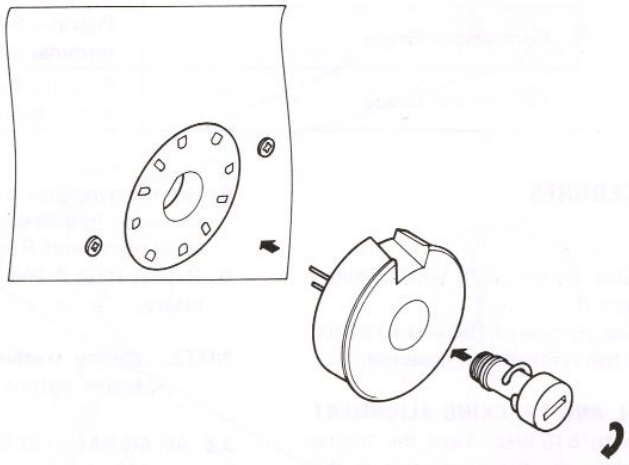

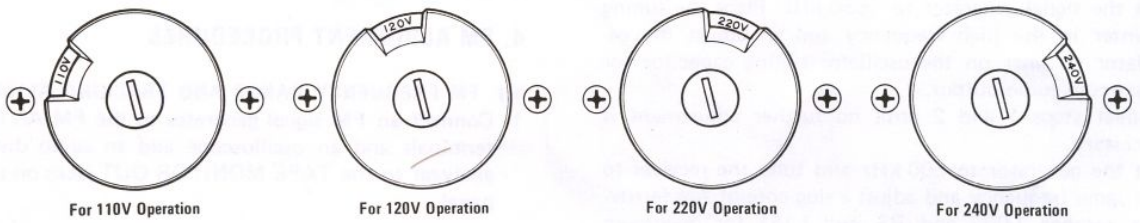

Figure 2. Voltage Conversion Chart

5. Turn R001 from MIN to MAX to assure the muting threshold level can change in the range of 6 to 50 μV.

4.4 DOLBY FM TAPE OUTPUT SETTING

1. Set the modulation of FM signal generator to 400 Hz, 50% (±37.5 kHz Dev.).
2. Set the signal generator to provide 1 kμV at 98 MHz. Tune the receiver to the same frequency so that the center tuning meter pointer indicates its center.
3. Switch the SELECTOR to the FM 25 μS position. Set the trimming resistors RC01 and RC02 so that the output of the TAPE MONITOR OUT jacks R and L become 580 mV at VTVM.

5. AUDIO ADJUSTMENT

1. Main Amplifier DC off-set alignment
   Connect a DC voltmeter with 0.5 or 1 V range between the speaker terminals and adjust the trimming resistor R729 for "zero" DC output on the meter. Repeat the same procedure for the other channel.

NOTE: During this alignment no load should be connected to the speaker terminals.

2. Idle-current adjustment
   Connect a VTVM between pin terminals J719 and J729. Next, adjust the trimming resistor R747 so the VTVM reads 25 mV DC. Repeat the same procedure for the other channel.
3. Check DC off-set voltage aligned in the procedure 2 and if any DC output is observed on the DC voltmeter, adjust the R729 again for "zero" output.

6. VOLTAGE CONVERSION FOR EUROPEAN MODEL

The European version of the Model 2385 is equipped with a universal power transformer that may be adjusted to operate at 110 V, 120 V, 220 V, or 240 V AC at 50 to 60 Hz. To convert the unit to a different power source voltage, reposition conversion plug at shown in Figure 2.

CAUTION: DISCONNECT POWER SUPPLY CORD FROM AC OUTLET BEFORE CONVERTING VOLTAGE.

FTZ REGULATION

Instruction for the use in the range other than specified in FTZ codes.

Achtung für die Leute, die in dem Gebiet wohnen, wo die FTZ-Bestimmungen vorherrschend sind.

Sollte das Gerät auch für Frequenzen auszerhalb des in den FTZ-Bestimmungen angegebenen Bereiches empfangebereit sein, bitten wir, den Bereich durch Nachstellen des Kernes in der Oszillatorspule (in der Abbildung mit "FTZ" gekennzeichnet) so zu korrigieren, dass er den Bestimmungen entspricht.

OWNER'S NOTES

7. DIAGRAMS

7.1 BLOCK DIAGRAM

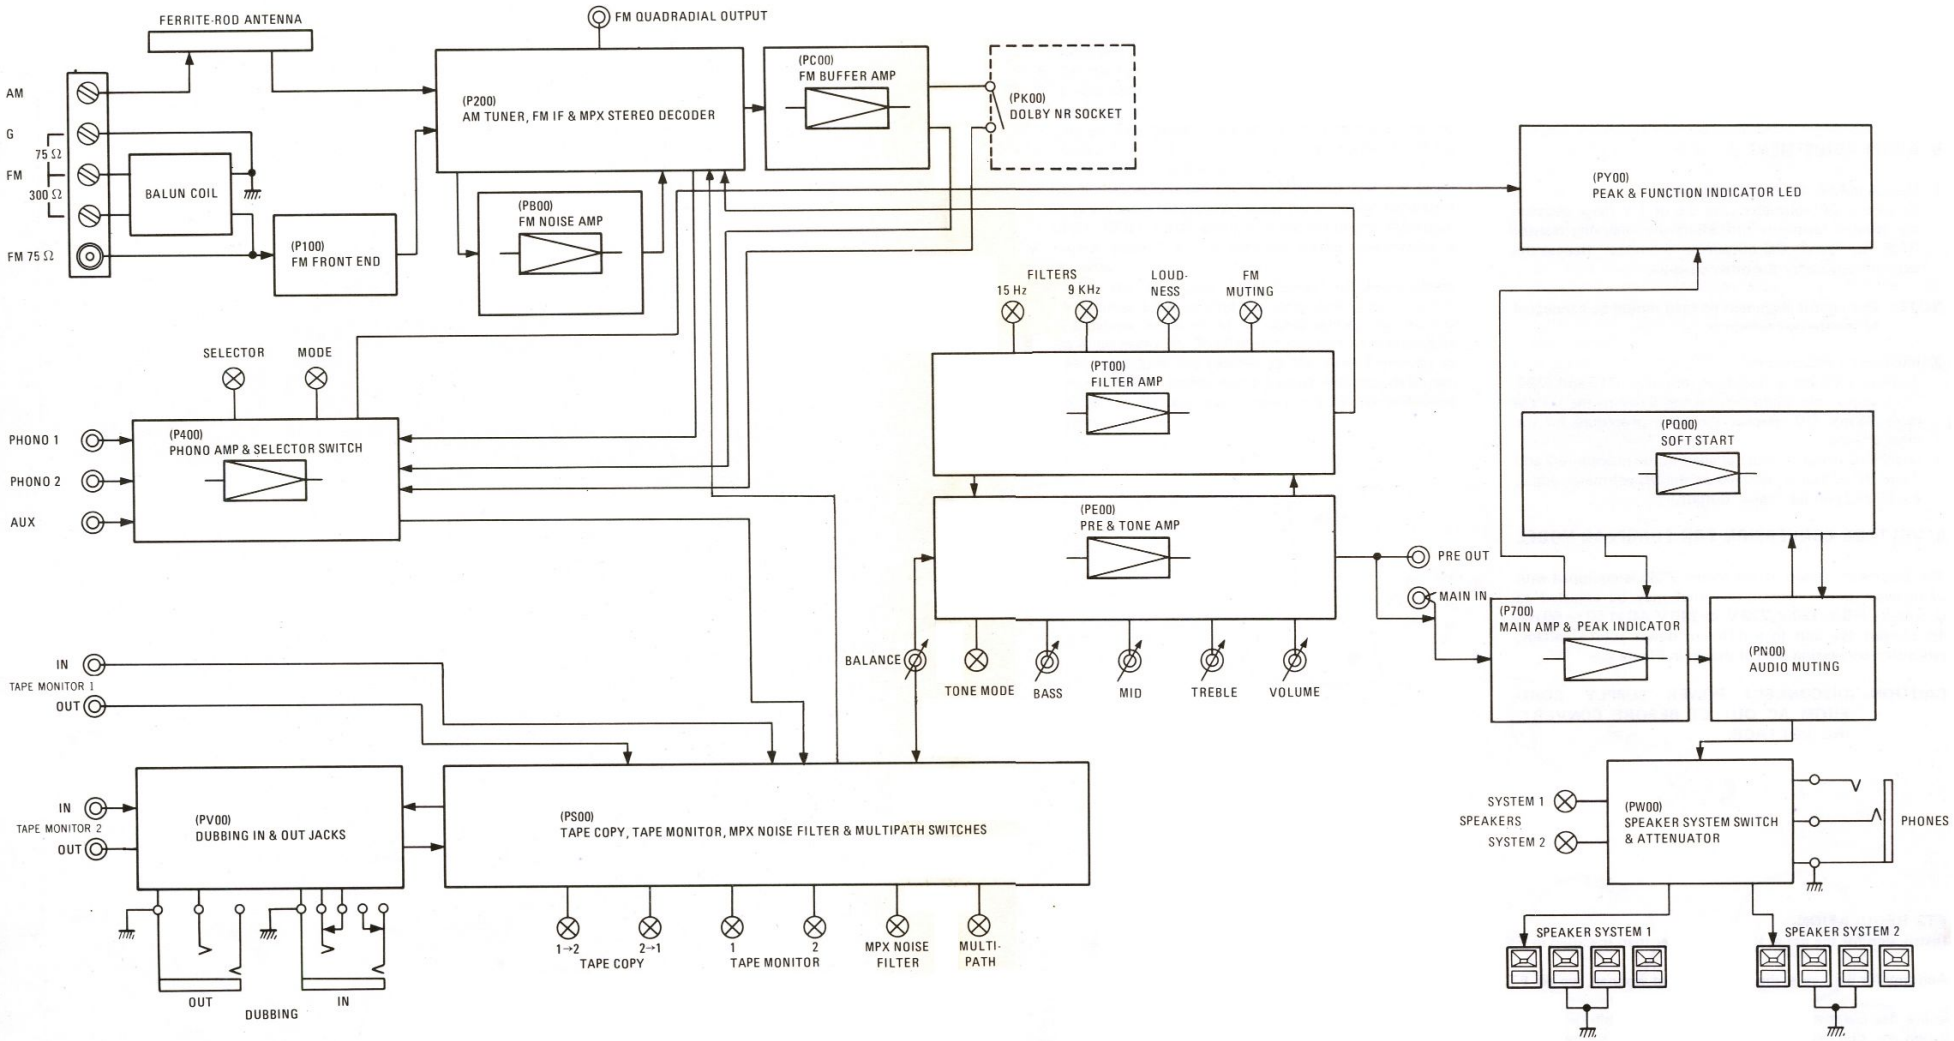

7.2 CONNECTION DIAGRAM - U.S.A. & CANADA

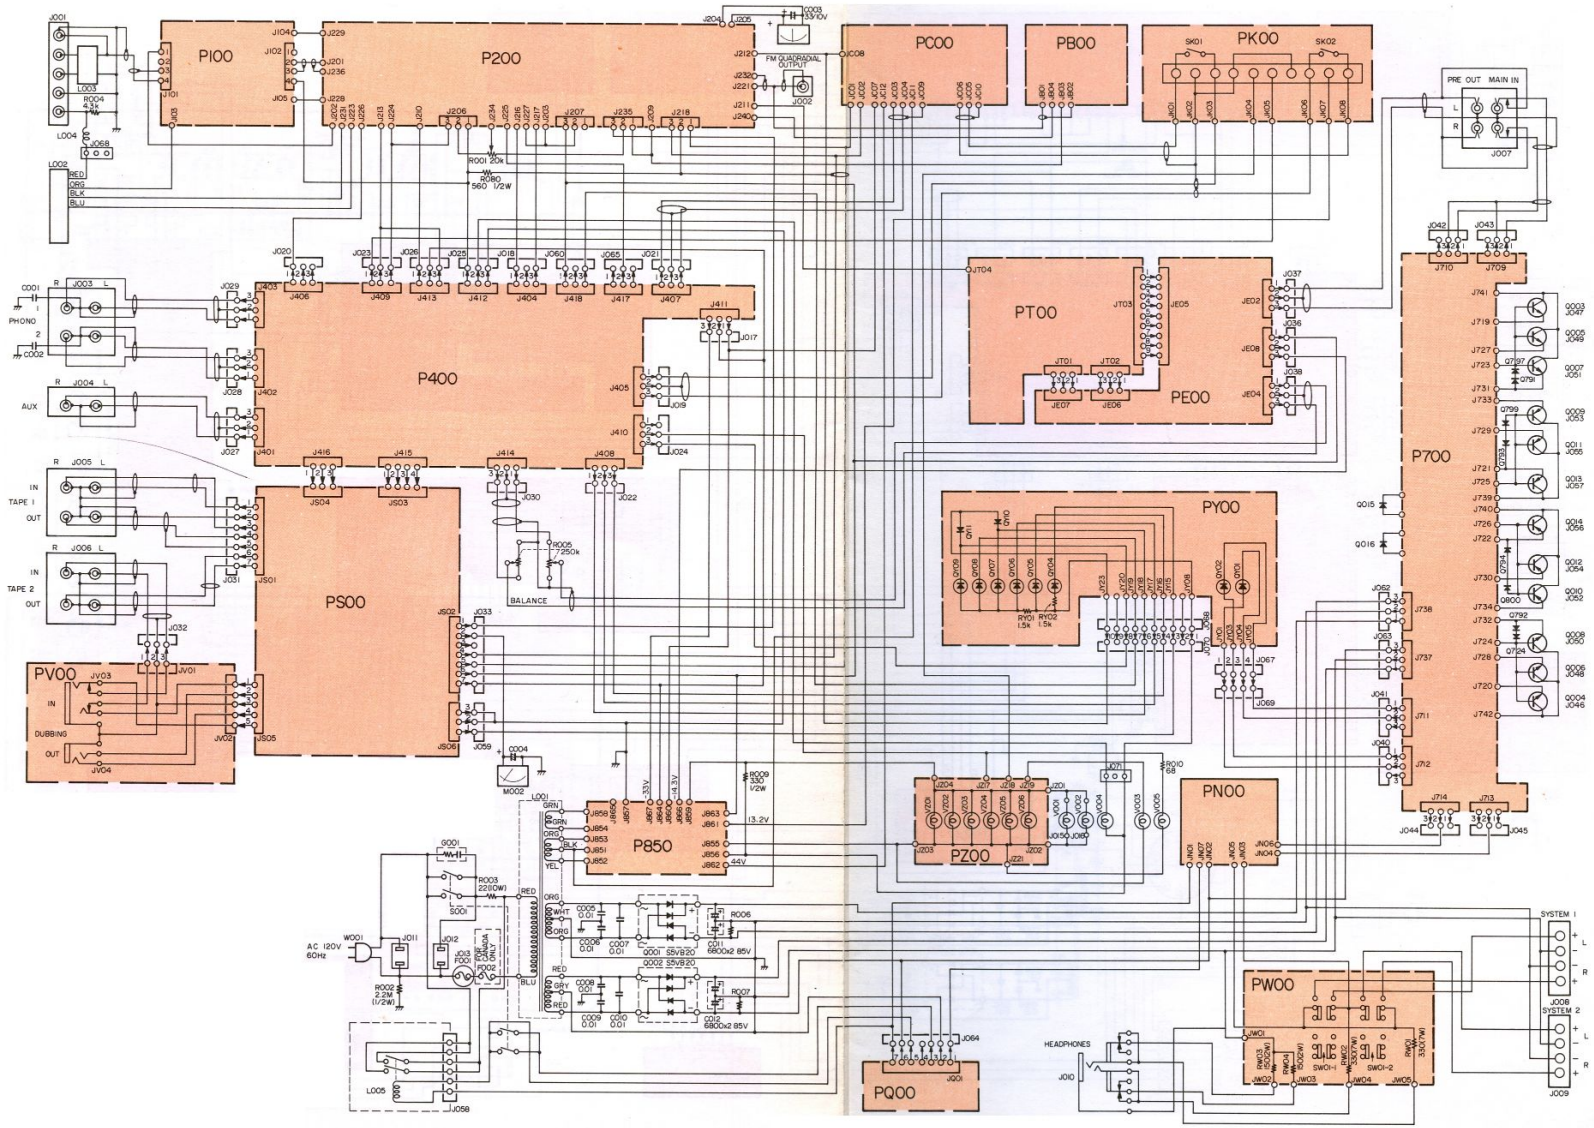

7.3 CONNECTION DIAGRAM - EUROPE

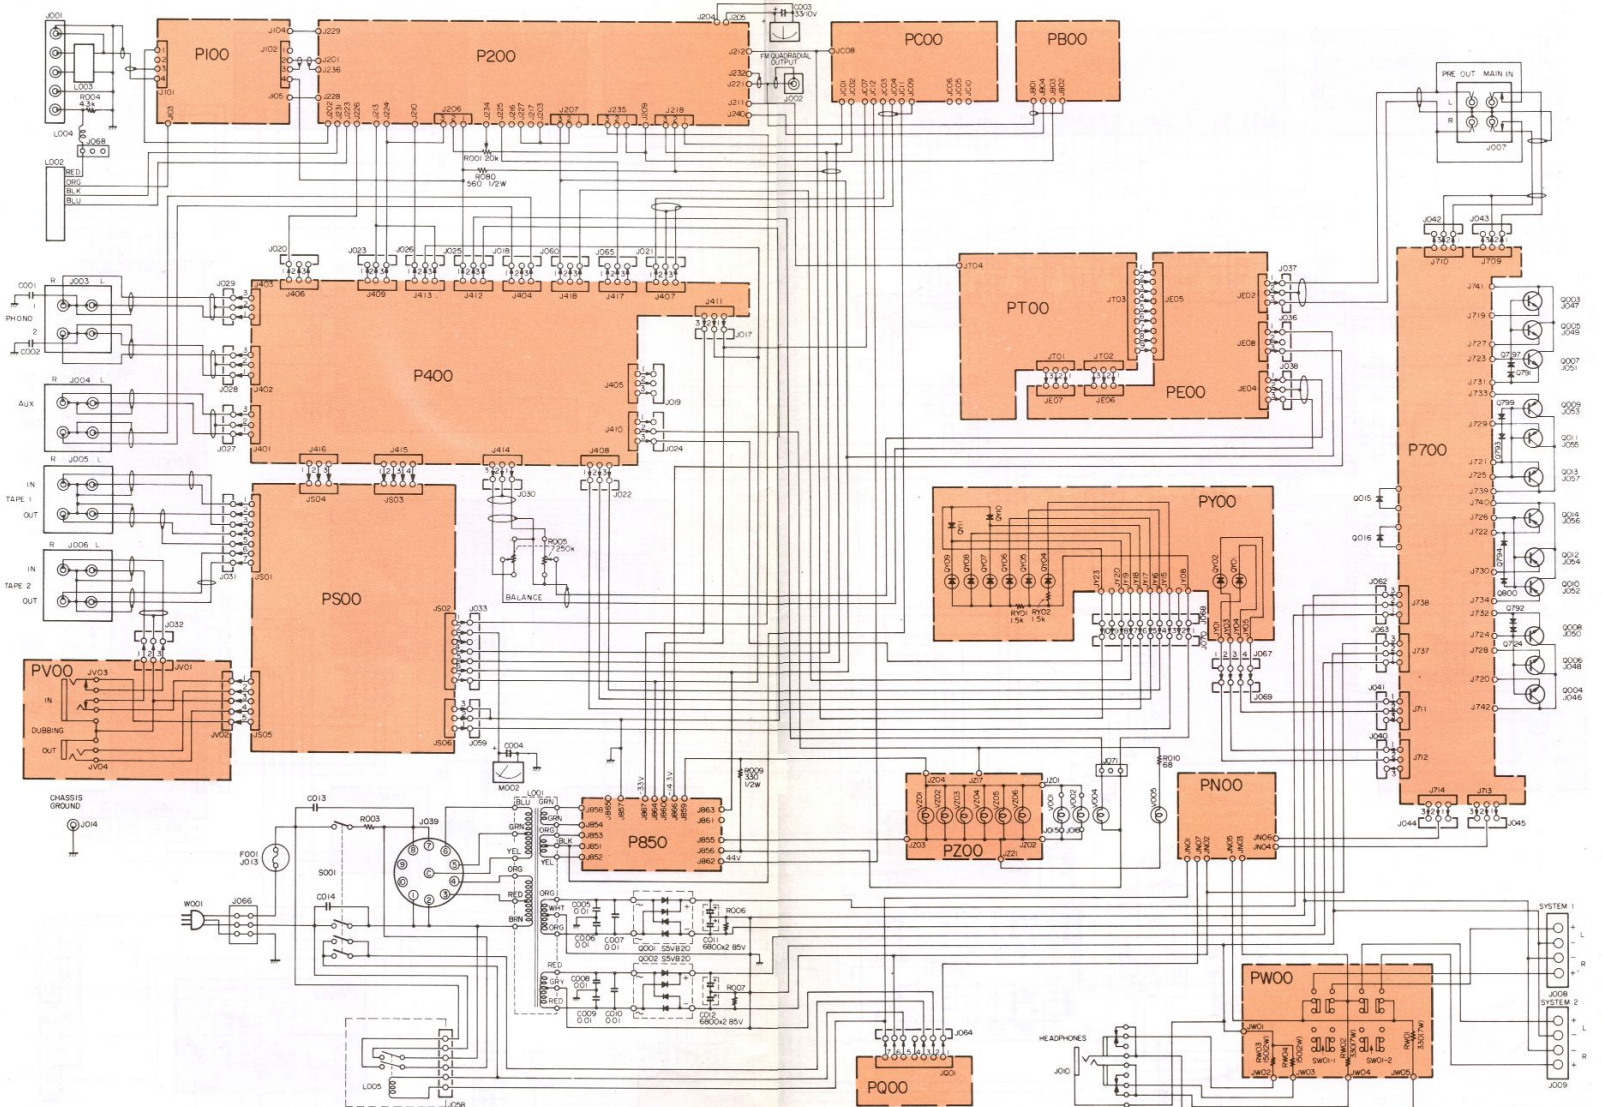

8. SCHEMATIC DIAGRAMS AND COMPONENT LOCATIONS

8.1 FM FRONT END CIRCUIT BOARD P100

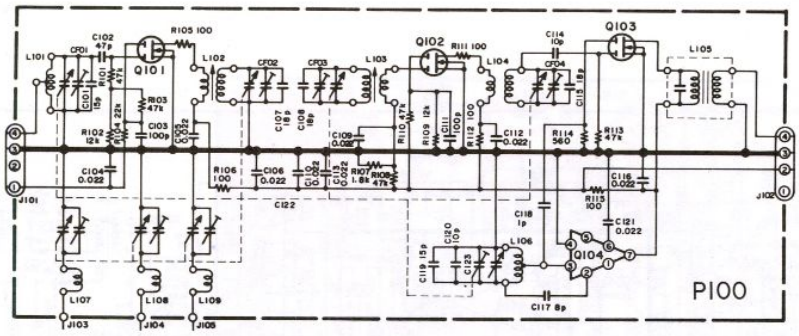

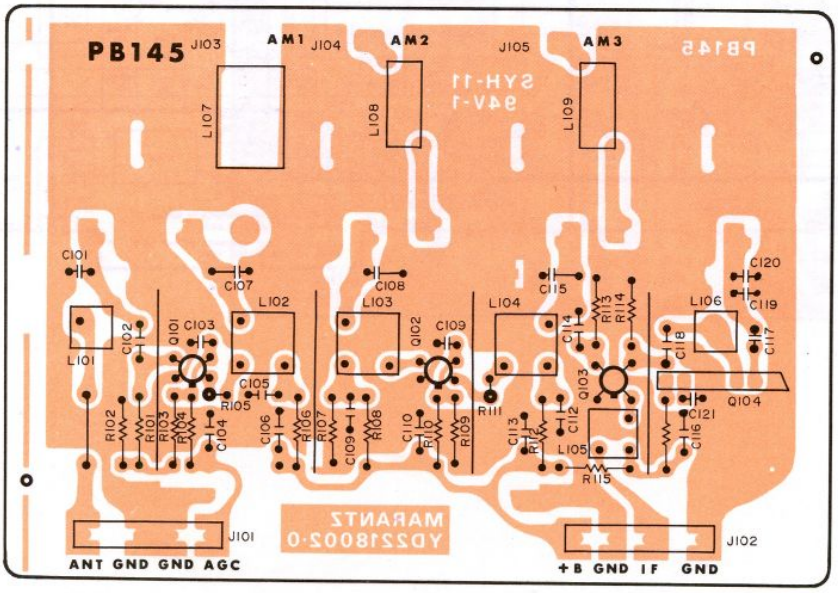

8.2 AM TUNER, FM IF & MPX STEREO DECODER CIRCUIT BOARD P200

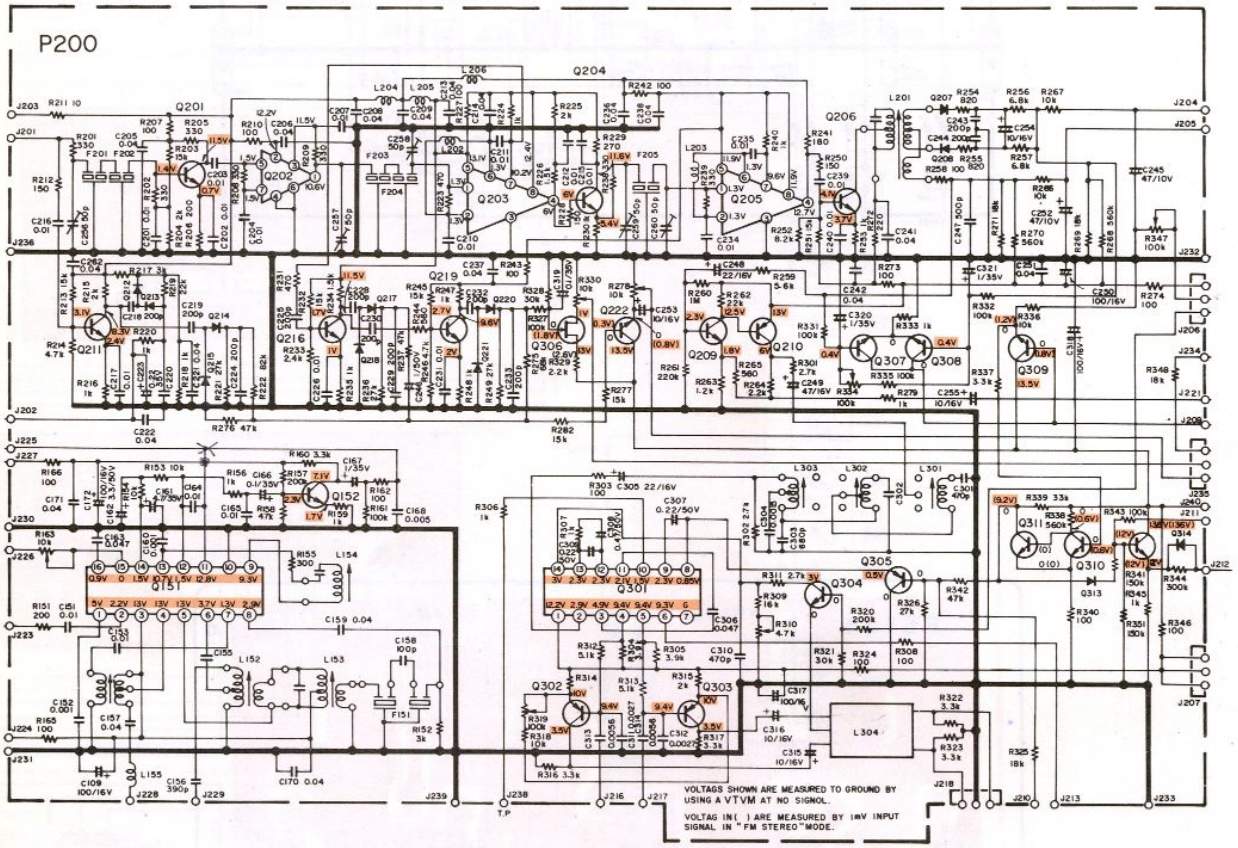
P200
VOLTAGES SHOWN ARE MEASURED TO GROUND BY USING A VTVM AT NO SIGNOL.
VOLTAG IN( ) ARE MEASURED BY 1mV INPUT SIGNAL IN "FM STEREO" MODE.

8.2 AM TUNER, FM IF & MPX STEREO DECODER CIRCUIT BOARD P200

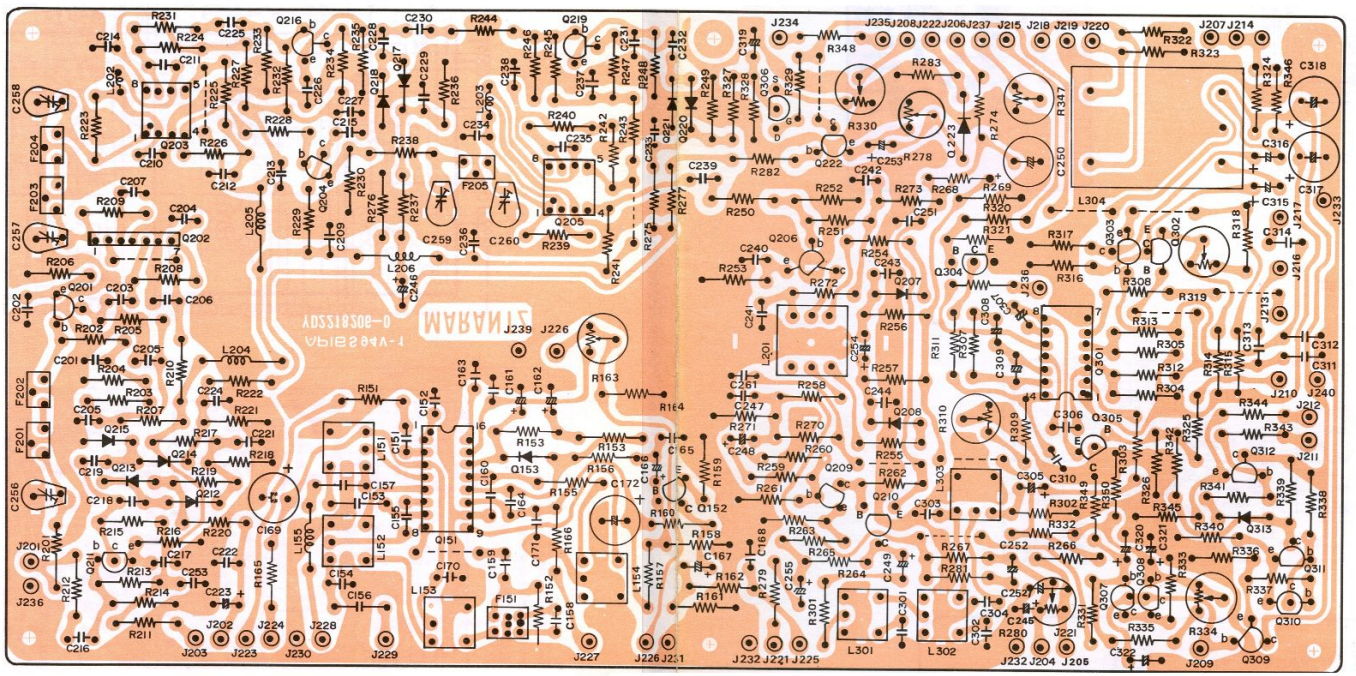

8.3 FM NOISE AMP CIRCUIT BOARD PB00



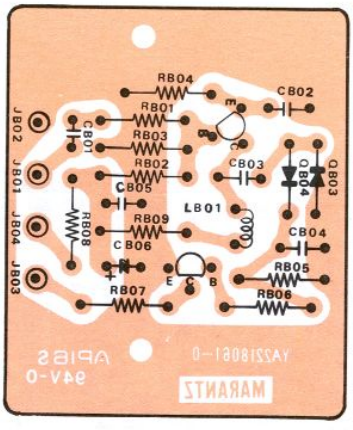

8.4 FM BUFFER AMP CIRCUIT BOARD PC00

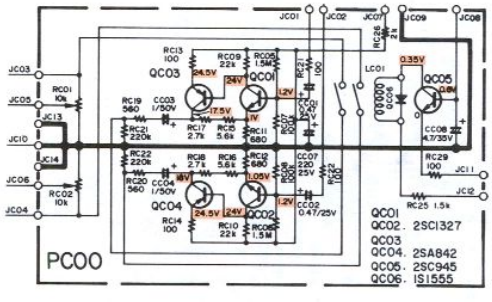

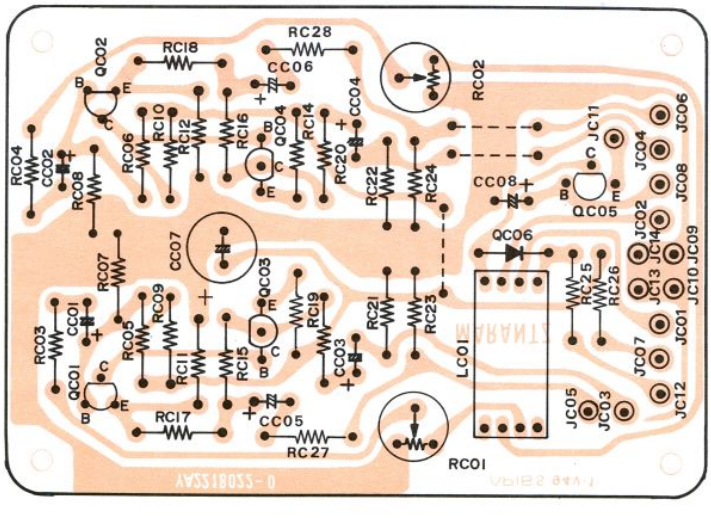

8.5 PHONO AMP & SELECTOR SWITCH CIRCUIT BOARD P400

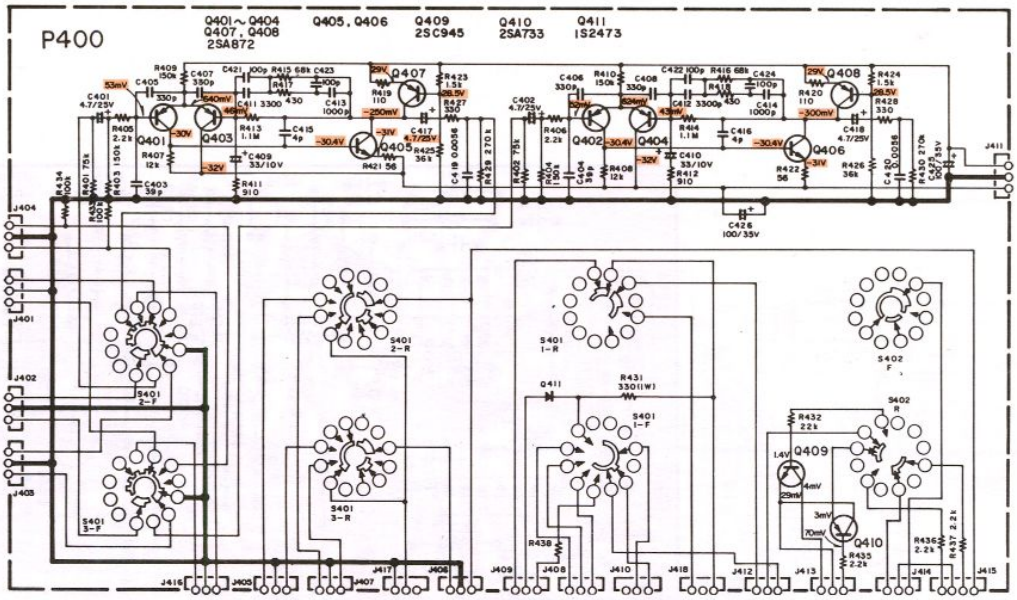

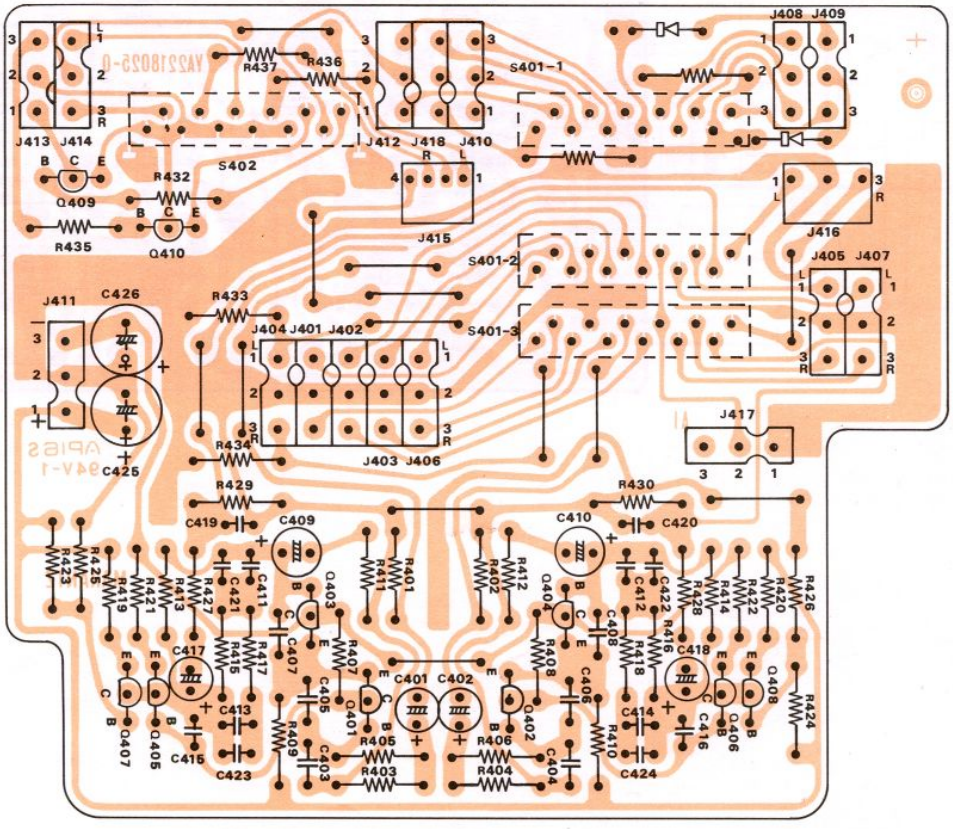

8.6 POWER SUPPLY CIRCUIT BOARD P850

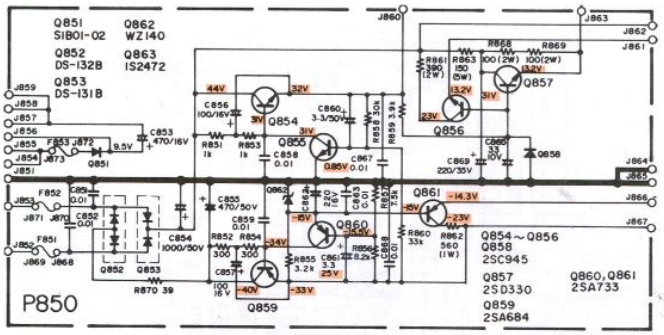

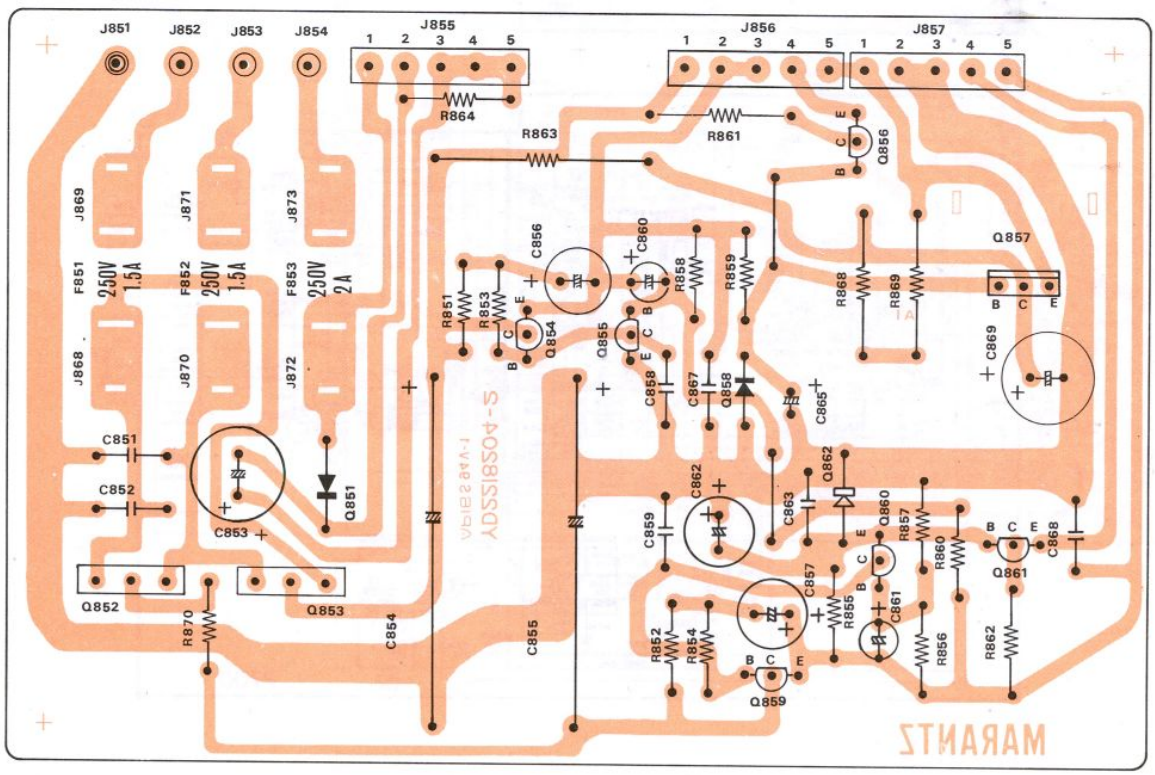

8.7 MAIN AMP & PEAK INDICATOR CIRCUIT BOARD P700

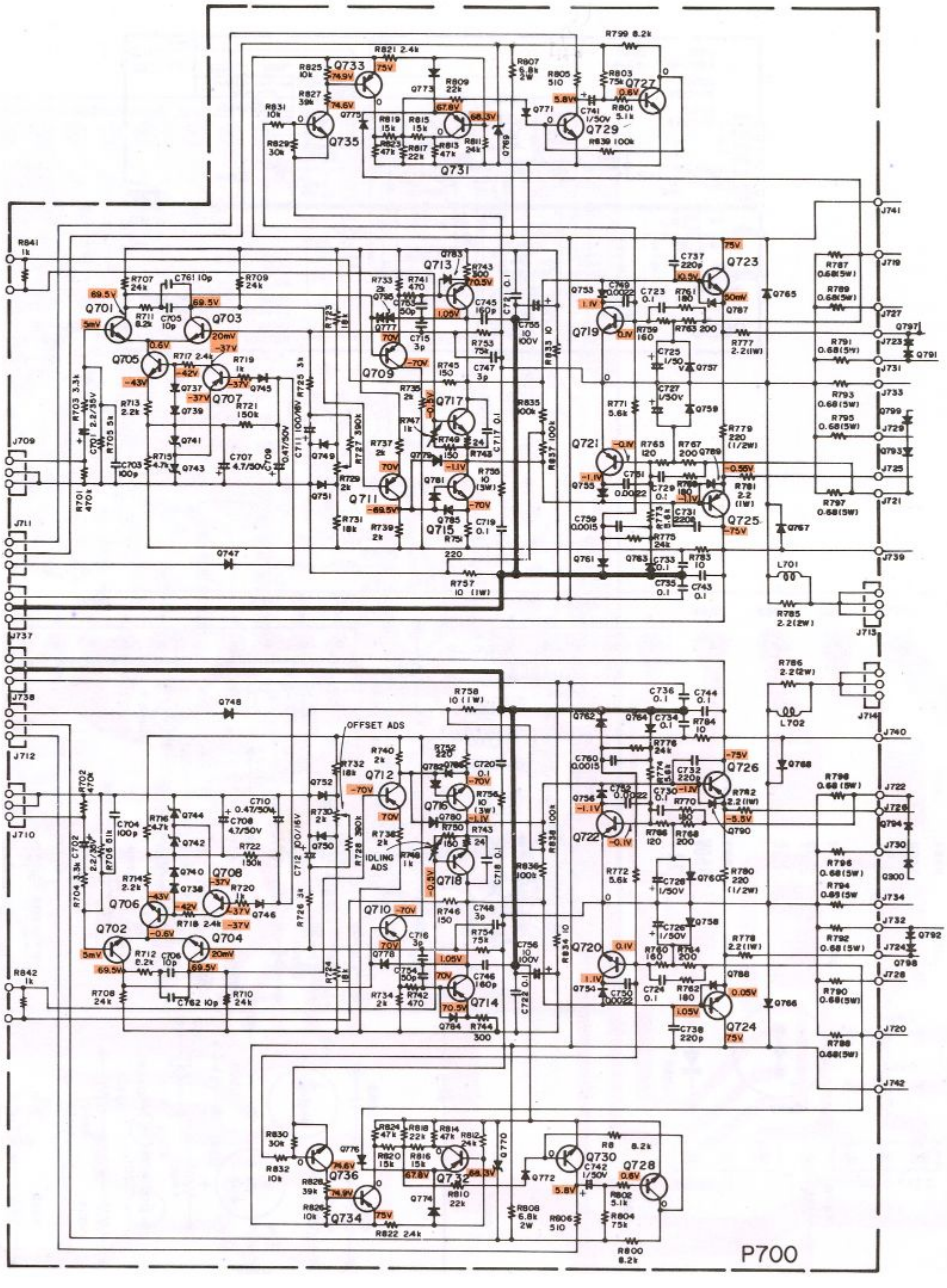

8.7 MAIN AMP & PEAK INDICATOR CIRCUIT BOARD P700

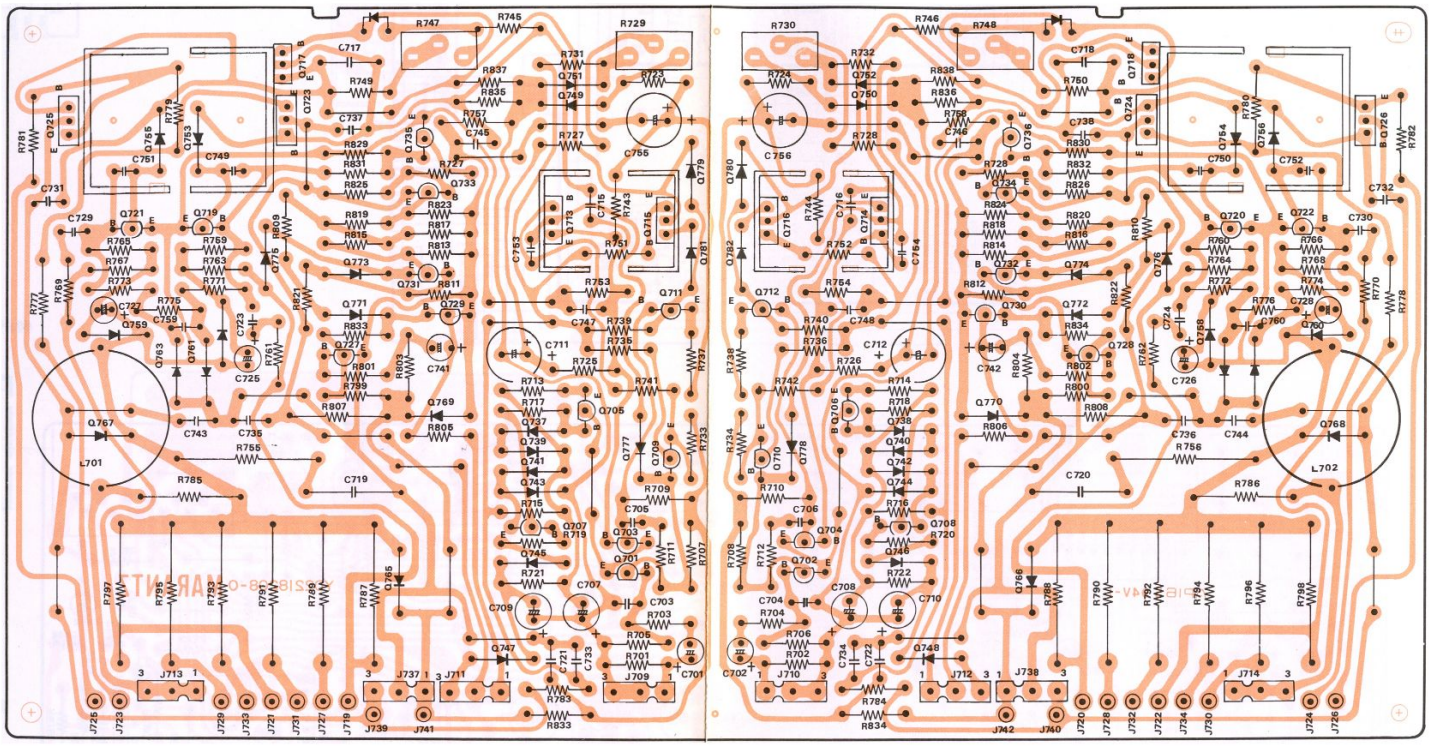

8.8 PRE & TONE AMP CIRCUIT BOARD PE00

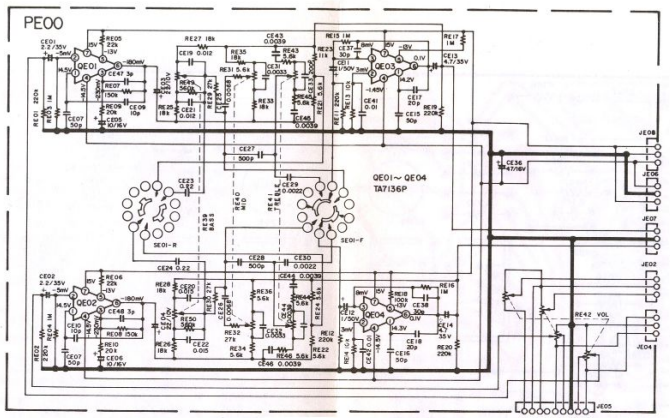

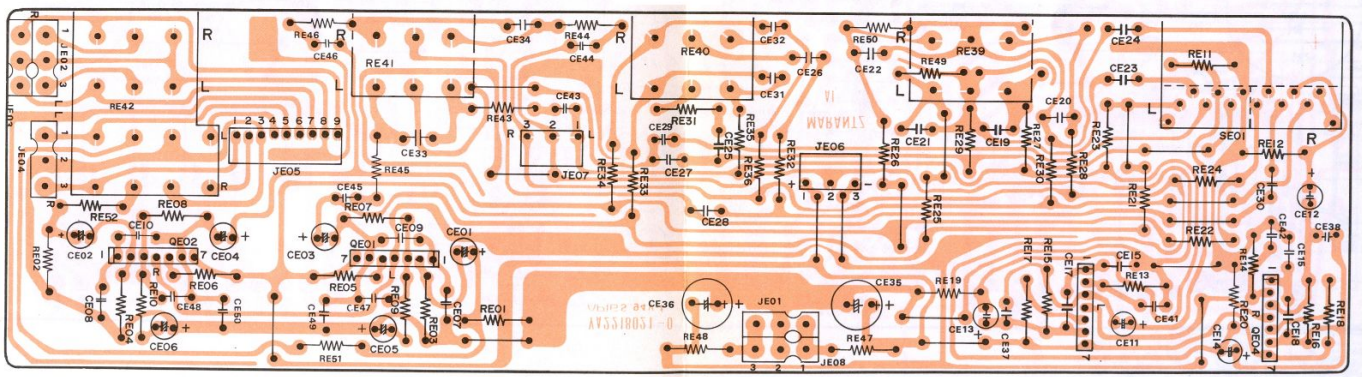

8.9 DOLBY NR SOCKET CIRCUIT BOARD PK00



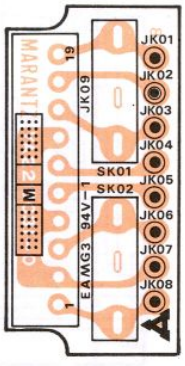

8.10 AUDIO MUTING CIRCUIT BOARD PN00



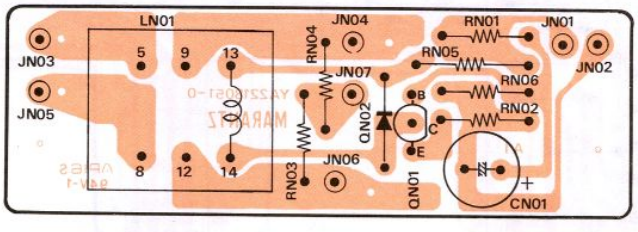

8.11 SOFT START CIRCUIT BOARD PQ00

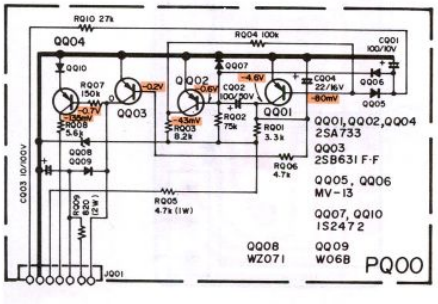

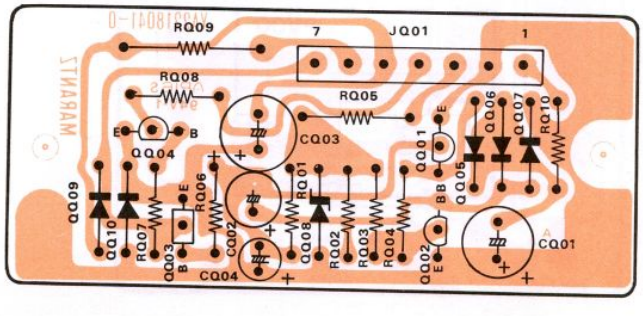

8.12 TAPE COPY, TAPE MONITOR, MPX NOISE FILTER & MULTIPATH SWITCHES CIRCUIT BOARD PS00

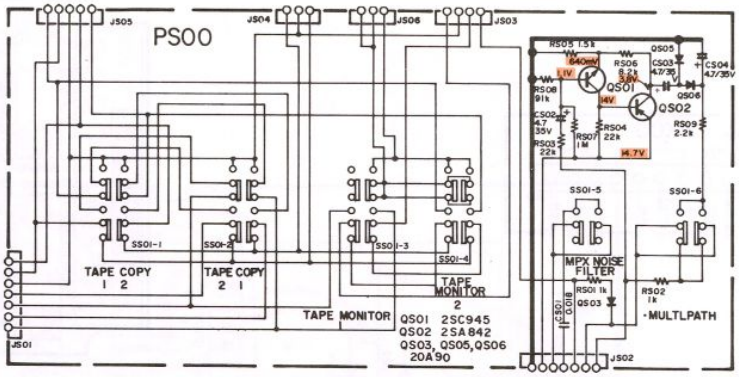

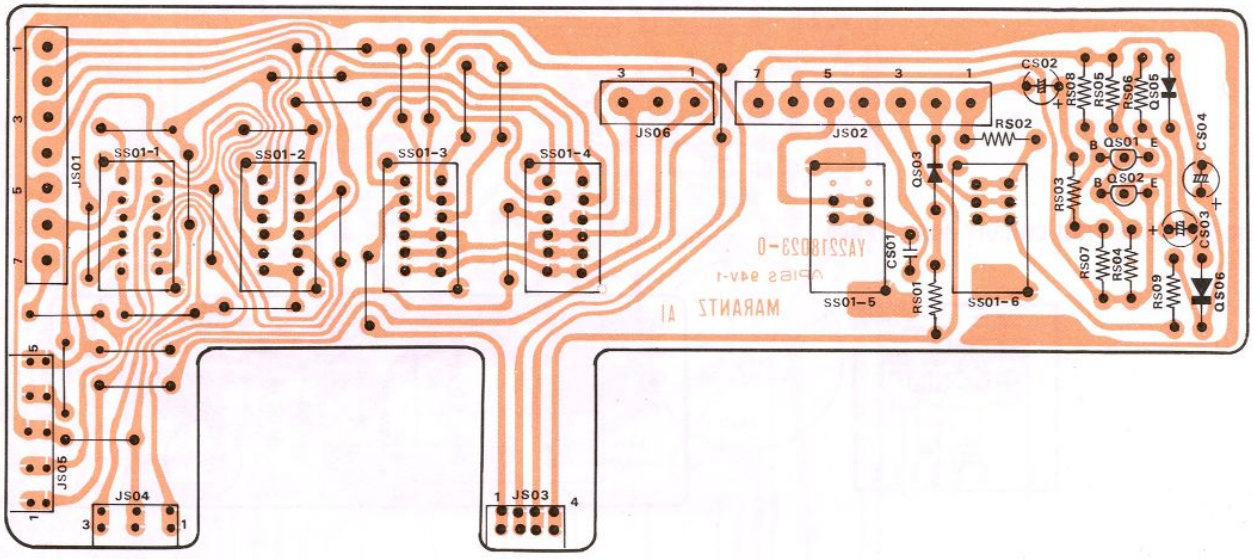

8.13 DUBBING IN & OUT JACKS BOARD PV00



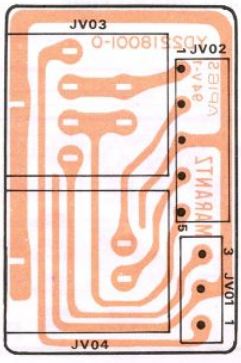

8.14 FILTER AMP CIRCUIT BOARD PT00

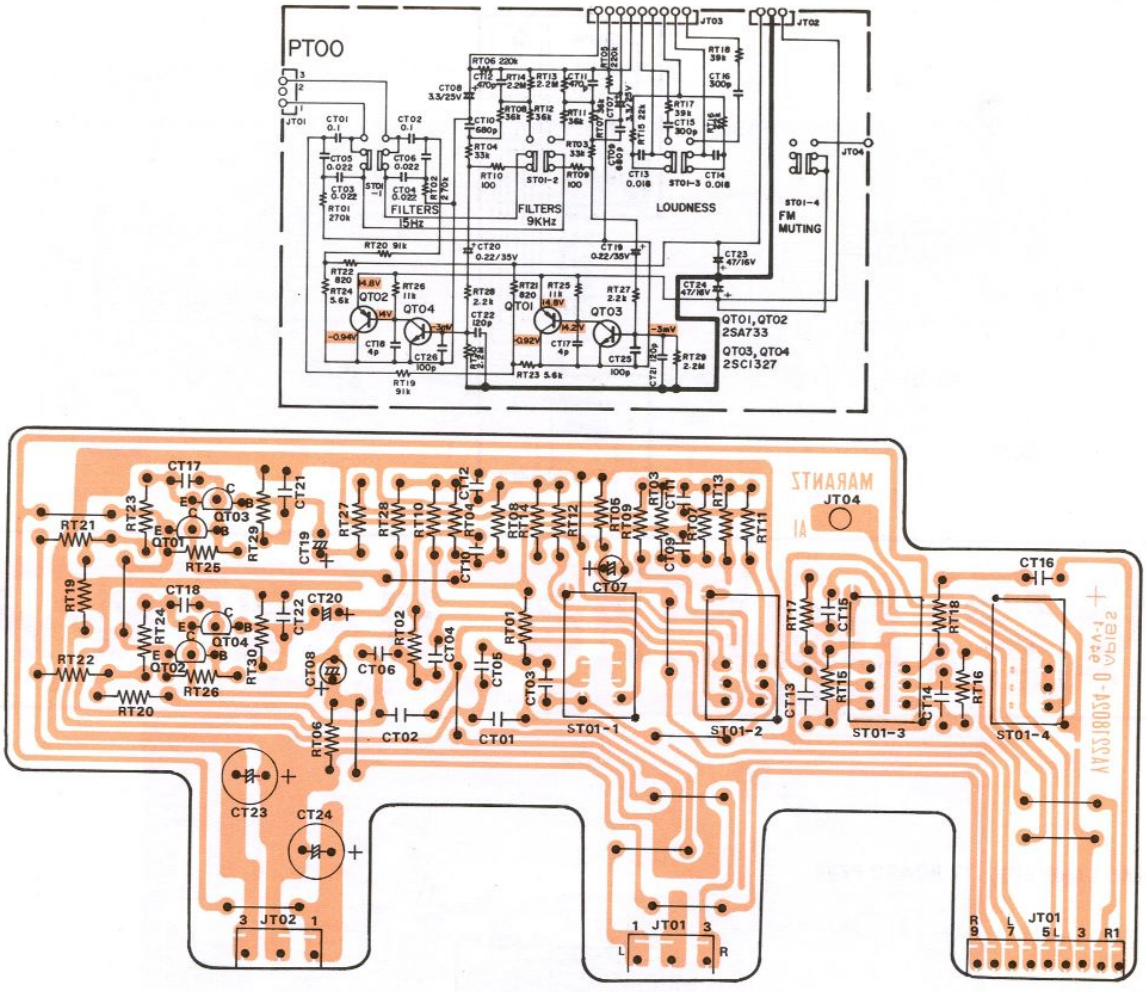

8.15 SPEAKER SYSTEM SWITCH & ATTENUATOR CIRCUIT BOARD PW00



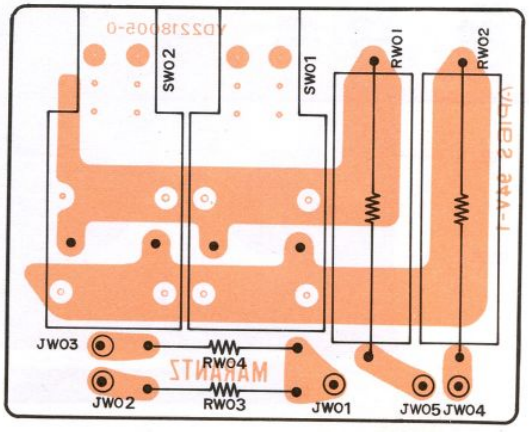

8.16 PEAK & FUNCTION INDICATOR LED CIRCUIT BOARD PY00

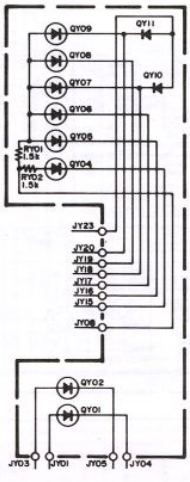

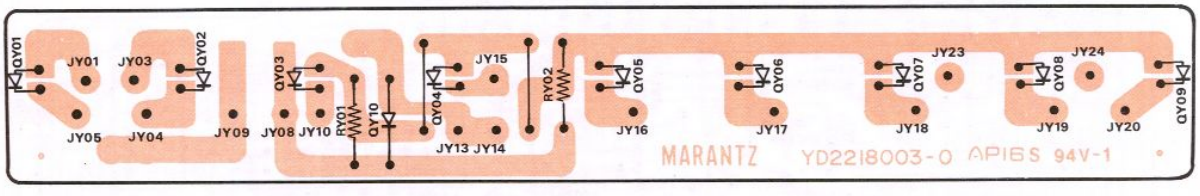

8.17 DIAL LAMP CIRCUIT BOARD PZ00



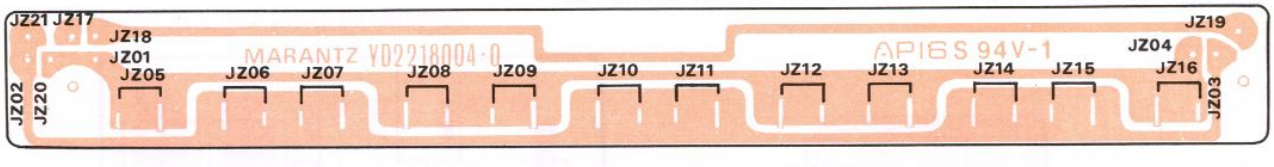

9. MAJOR COMPONENT LOCATIONS

9.1 CABINET - FRONT VIEW - U.S.A. & CANADA

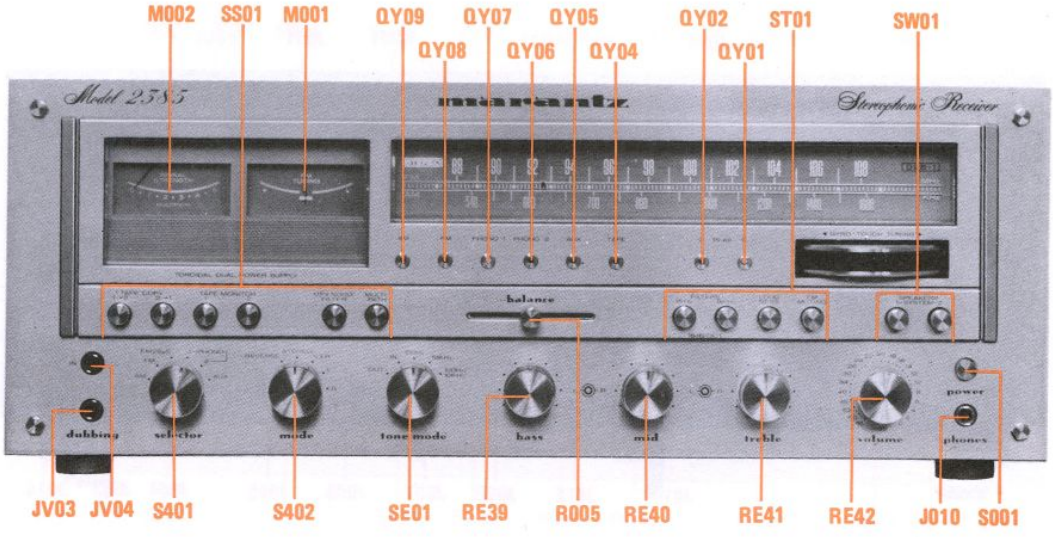

9.2 CHASSIS - TOP VIEW - U.S.A. & CANADA

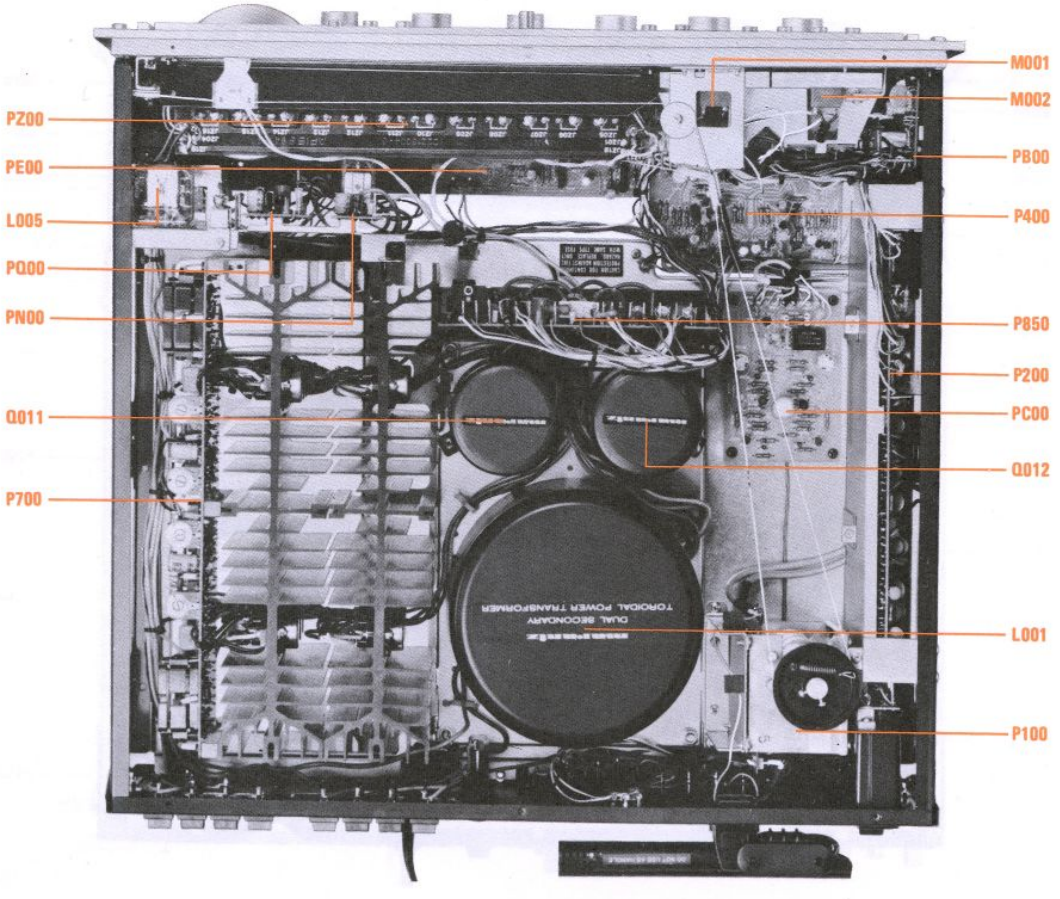

9.3 CABINET - REAR VIEW - U.S.A. & CANADA

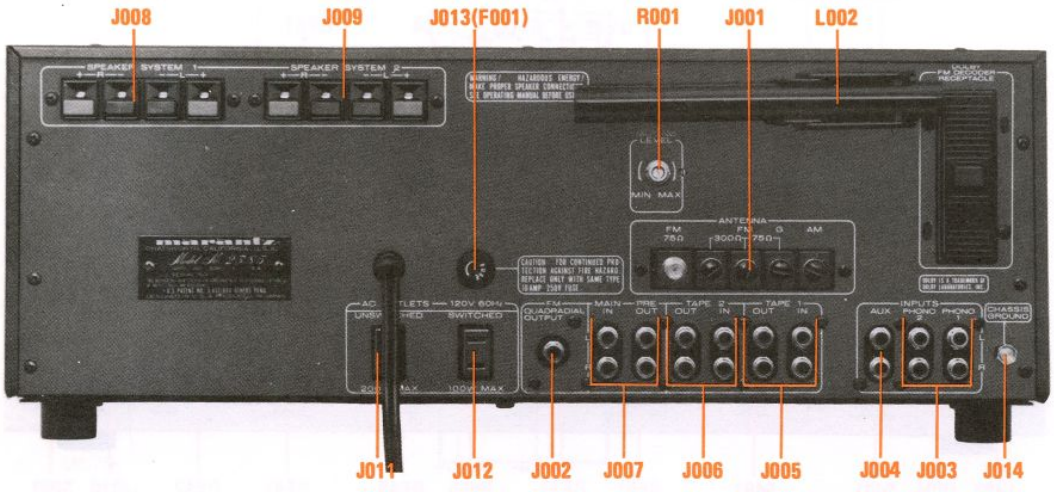

9.4 CHASSIS - BOTTOM VIEW - U.S.A. & CANADA

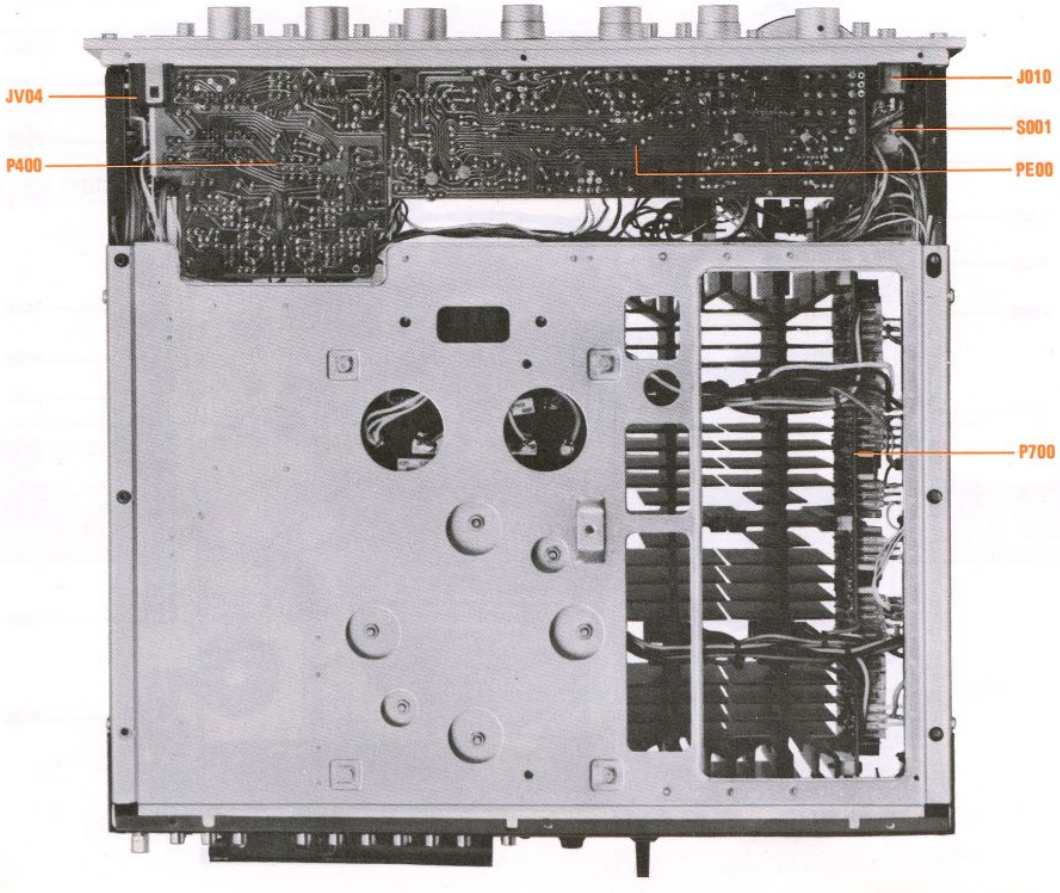

9.5 CABINET - FRONT VIEW - EUROPE

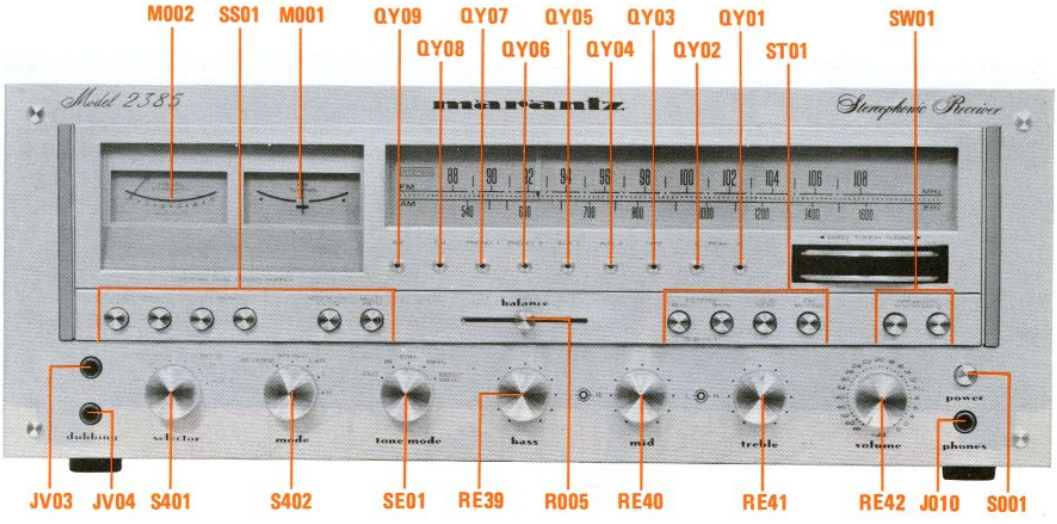

9.6 CHASSIS - TOP VIEW - EUROPE

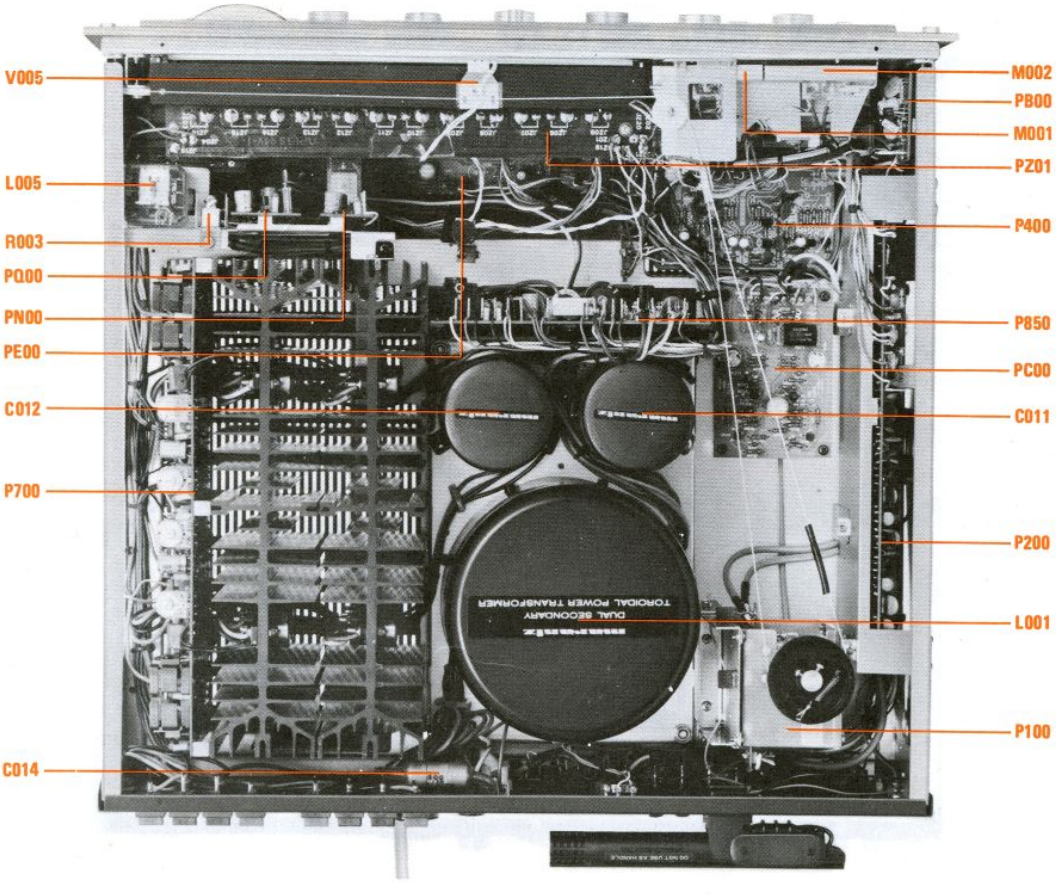

9.7 CABINET - REAR VIEW - EUROPE

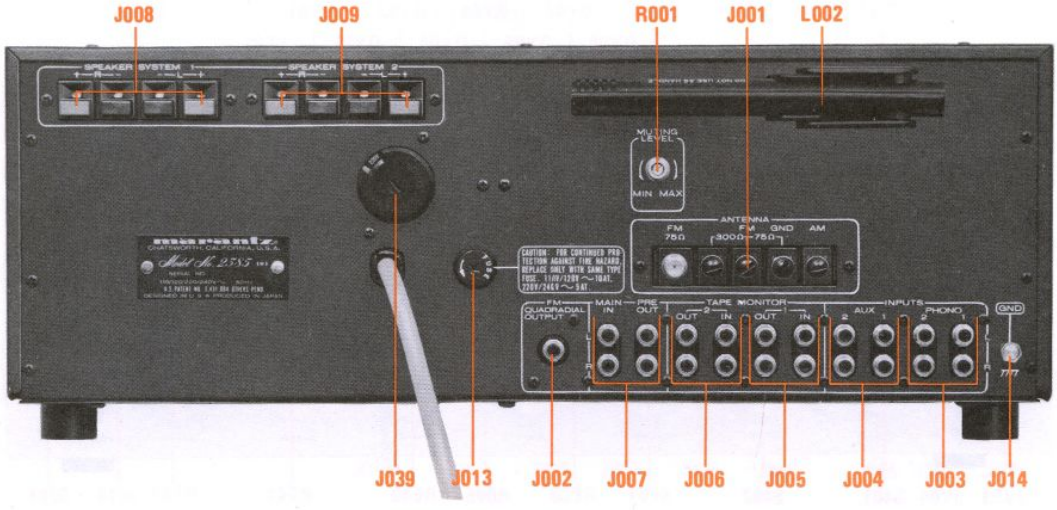

9.8 CHASSIS - BOTTOM VIEW - EUROPE

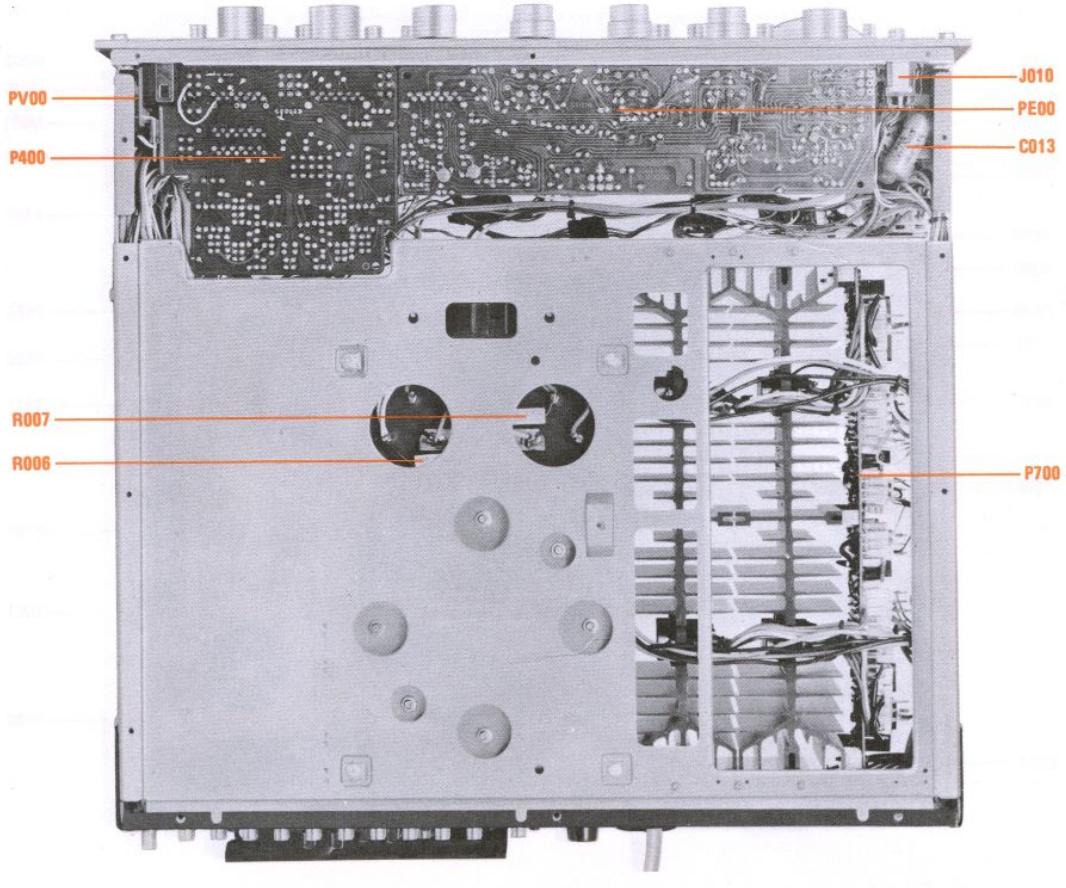

10. EXPLODED VIEWS

10.1 FRONT PANEL EXPLODED VIEW

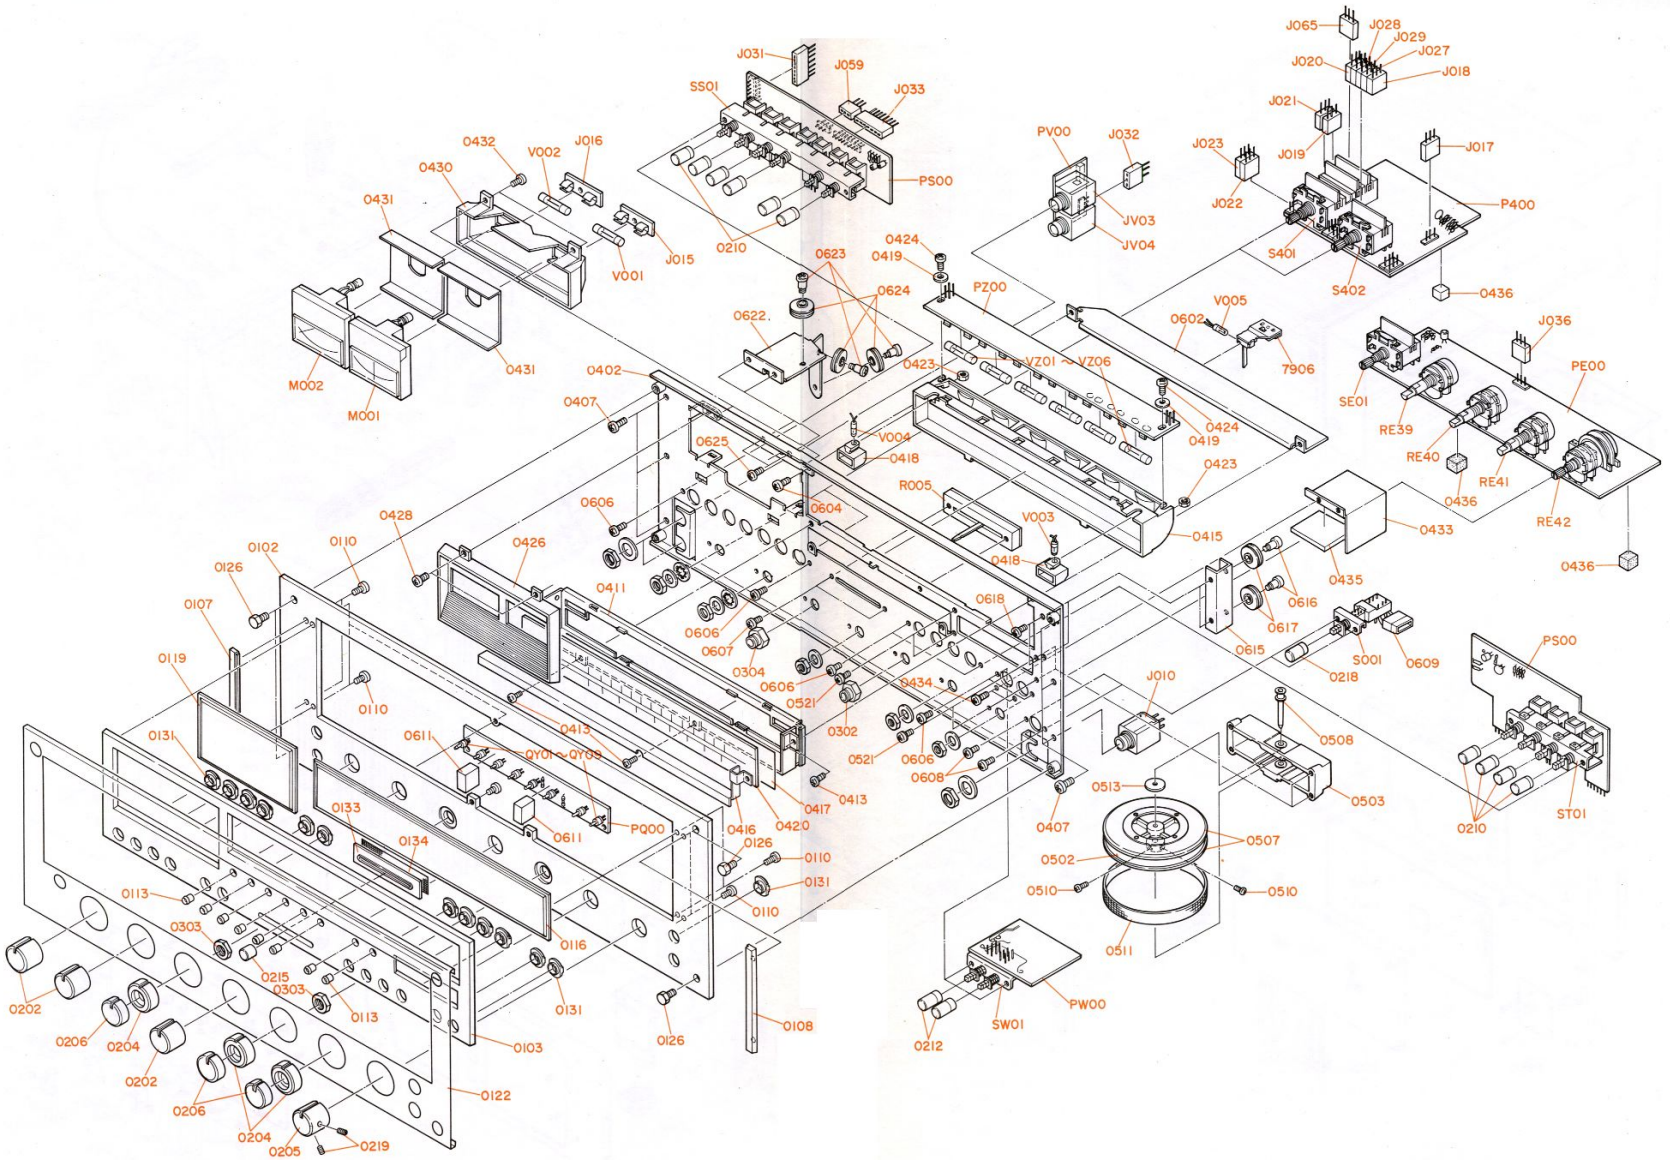

10.2 CHASSIS EXPLODED VIEW

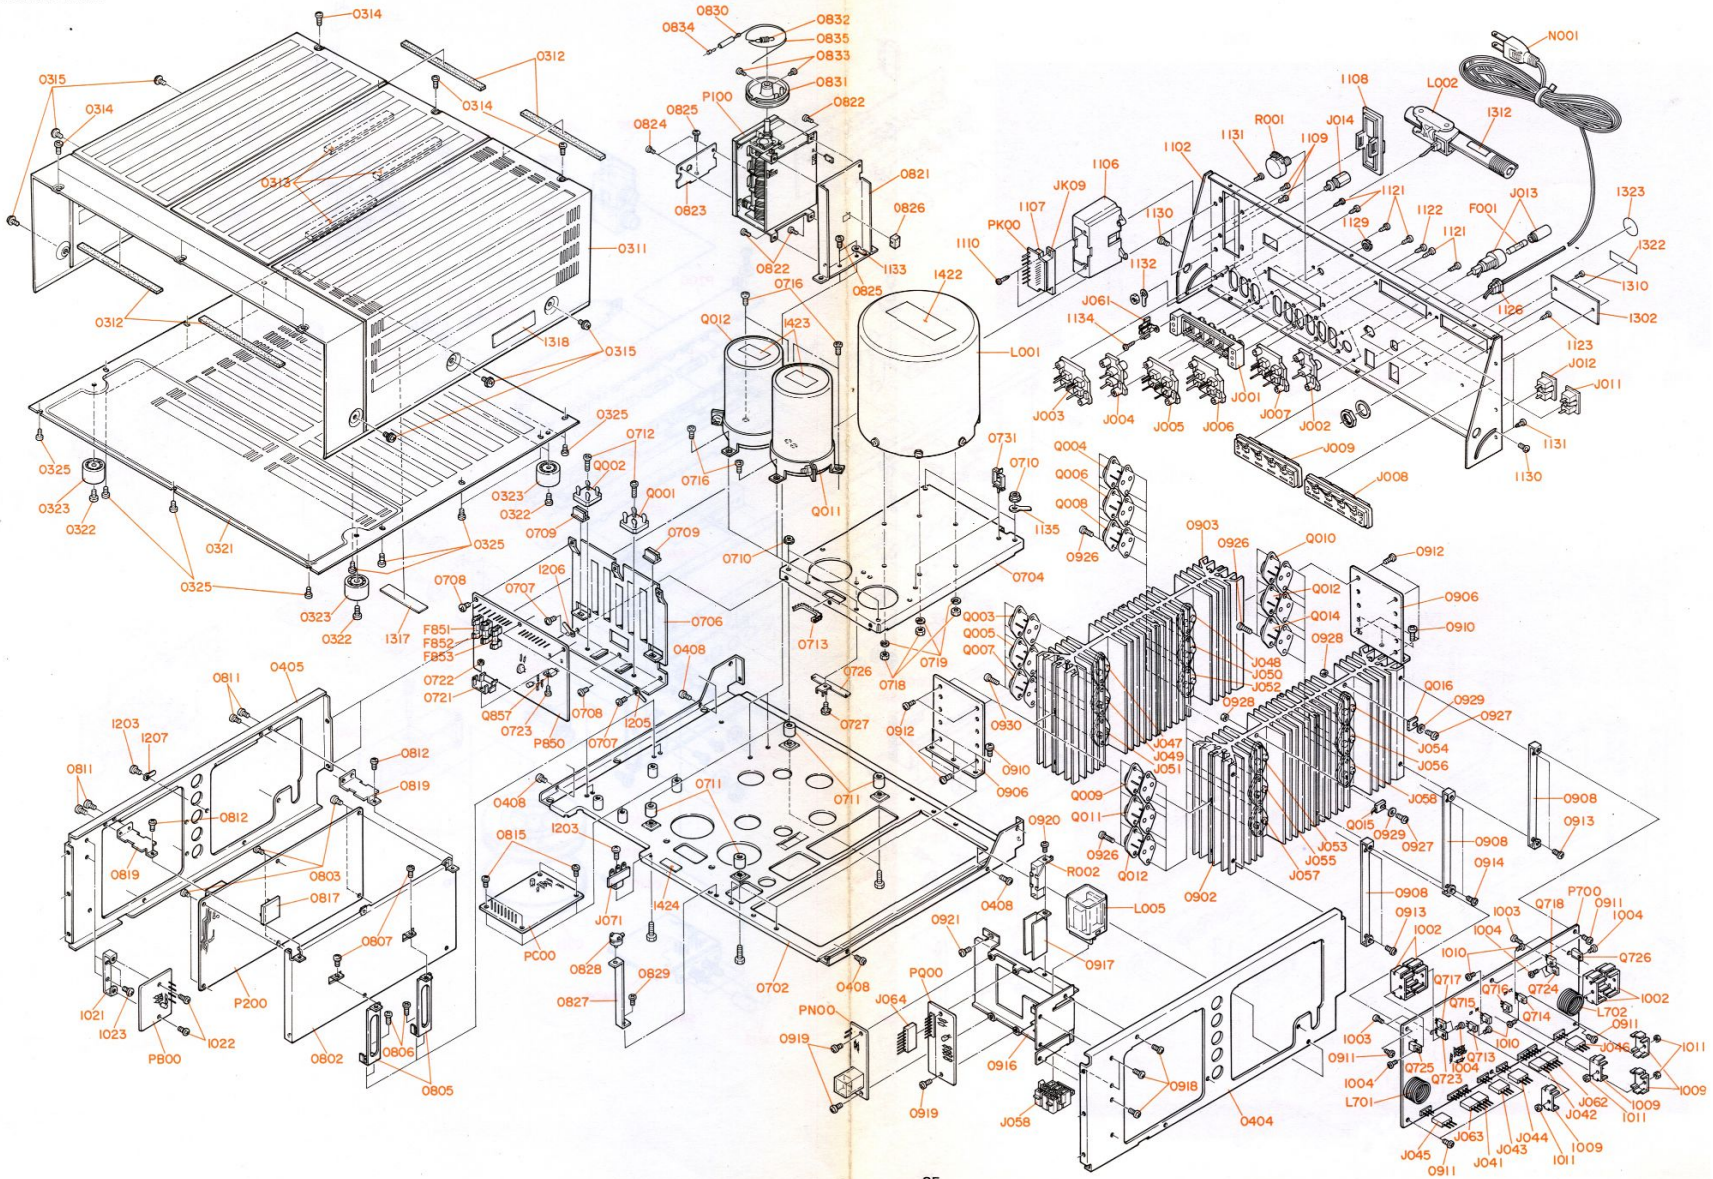

10.3 REAR PANEL EXPLODED VIEW - EUROPE

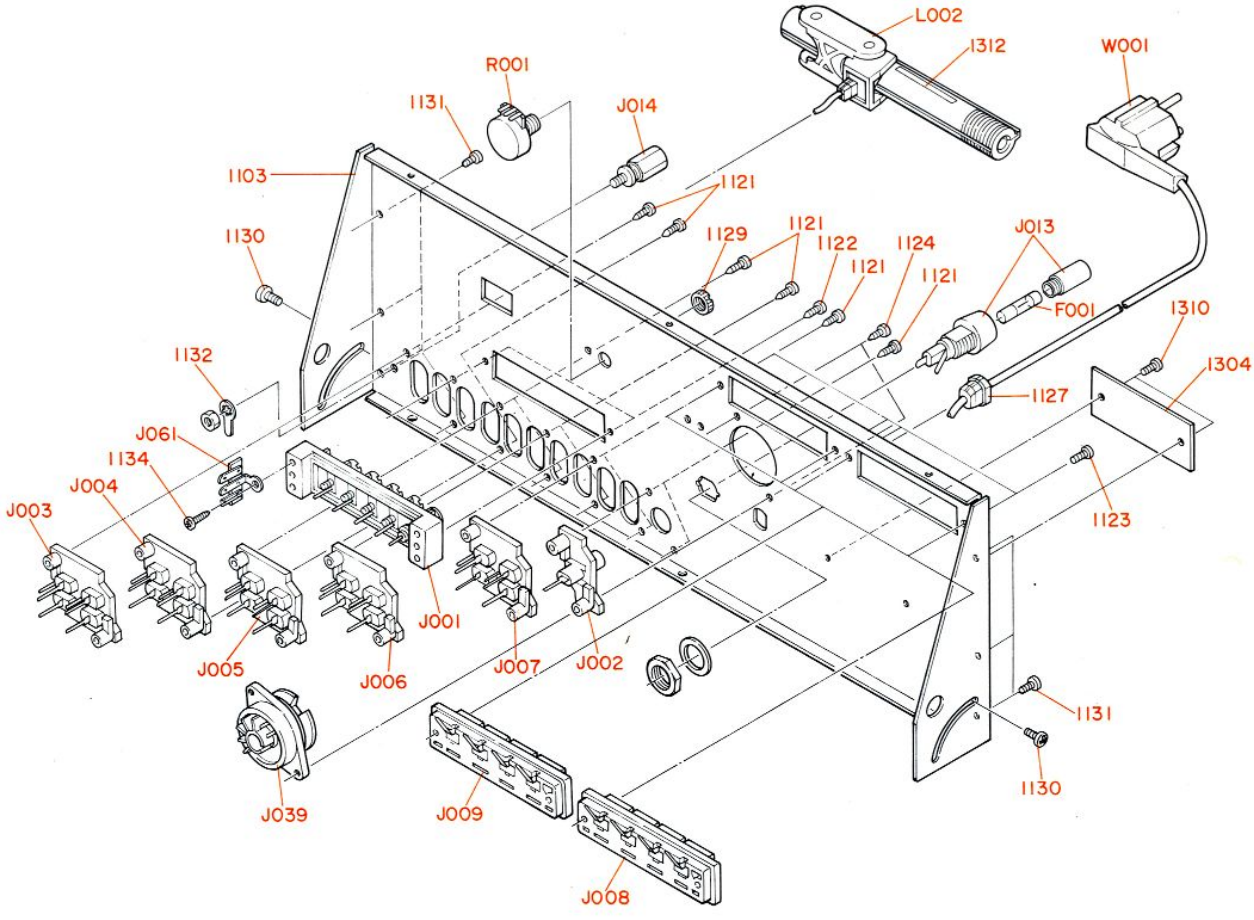

10.4 PACKING MATERIAL EXPLODED VIEW

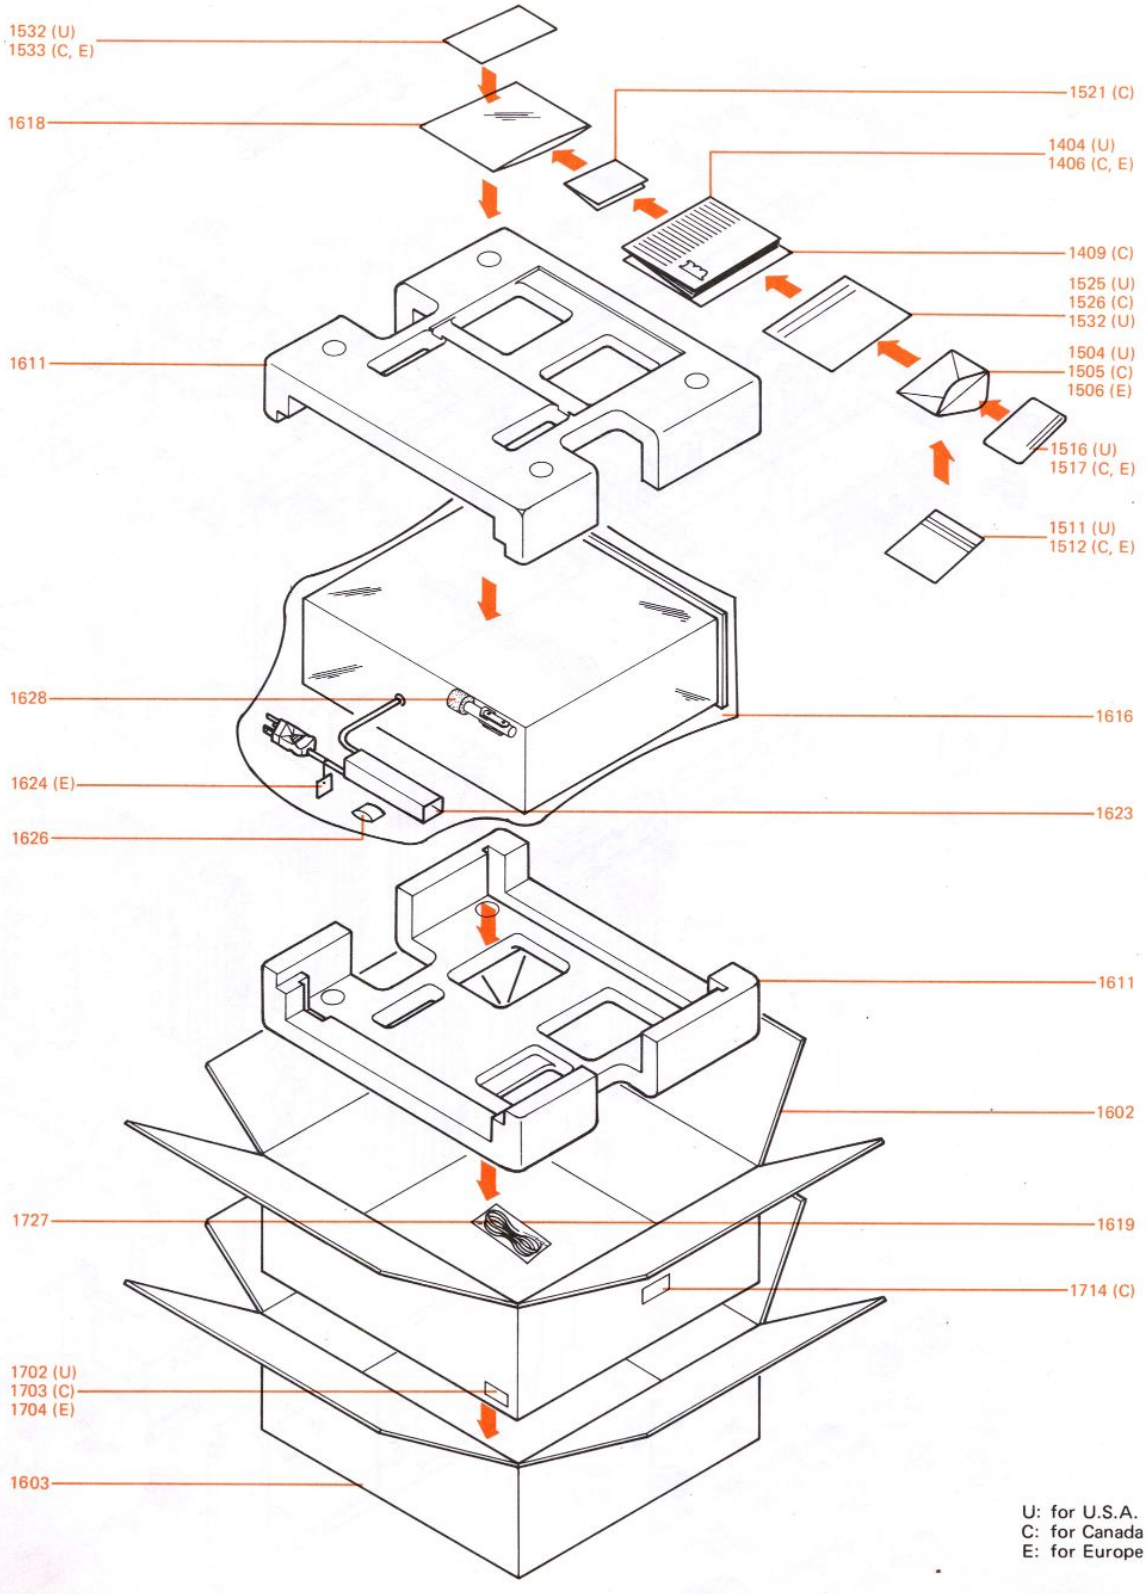

U: for U.S.A.
C: for Canada
E: for Europe

11. PARTS LIST

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
A	1	1		2218063400	Front Panel Assembly
A1			1	2218063410	Front Panel Assembly
0102	1	1	1	2218063014	Escutcheon
0103	1	1		2218063024	Escutcheon
0105			1	2218063120	Escutcheon
0107	1	1	1	2218063030	Escutcheon
0108	1	1	1	2218063040	Escutcheon
0110	10	10	10	51280308B0	B.H. Tapped Screw, B3x8ST
0113	8	8	9	2979259020	Bushing
0116	1	1	1	2219158110	Window
0119	1	1	1	2218158110	Window
0122	1	1	1	2218053010	Cover
0131	13	13	13	2978259010	Bushing
0133	1	1	1	2854259110	Bushing
0134	1	1	1	2219107020	Sheet
B	1	1	1	2218257400	Lid Assembly, Upper
0311	1	1	1	2218257010	Lid
0312	4	4	4	2577118070	Spacer
C	1	1	1	2219159400	Drum Assembly
0831	1	1	1	2219159010	Drum
0832	1	1	1	71101569M0	Spring
0833	2	2	2	51064019A9	Set Screw
D	1	1	1	2219273400	Flywheel Assembly
0502	1	1	1	2219273010	Flywheel
0507	2	2	2	2219063030	Escutcheon
0510	1	1	1	51820206B0	P.H.M. Screw, P2x6
0511	1	1	1	2219353010	Ring
E	1	1	1	1202006430	Hook Assembly
0834	1	1	1	1202258010	Hook
0835	1	1	1	72071605A0	String
0126	4	4	4	52017059J0	Bolt
0202	4	4	4	2221154230	Knob
0204	3	3	3	2210154220	Knob, Bass, Mid, Treble
0206	3	3	3	2210154210	Knob, Bass, Mid, Treble
0210	10	10	10	2218154010	Knob
0212	2	2	2	2218154020	Knob
0215	1	1	1	2970154013	Knob, Balance
0218	1	1	1	2970154033	Knob, Power
0302	1	1	1	2219101010	Support
0303	2	2	2	53118129G0	Hexagon Nut
0304	1	1	1	2219101020	Support
0314	6	6	6	51280306U0	B.H. Tapped Screw B, 3x6
0315	6	6	6	51480406S9	B.H.M. Screw F, 4x6
0321	1	1	1	2218257020	Lid
0322	4	4	4	51570410S9	P.H. Tapped Screw, P4x10ST
0323	4	4	4	2759057012	Leg
0325	13	13	13	51280410U0	B.H. Tapped Screw B, 4x10
0402	1	1	1	2218160012	Bracket
0404	1	1	1	2218160022	Bracket
0405	1	1	1	2218160032	Bracket
0407	6	6	6	51280408B0	B.H. Tapped Screw B, 4x8
0408	4	4	4	51280406B0	B.H. Tapped Screw B, 4x6
0411	1	1	1	2218271010	Holder
0413	3	3	3	51280306B0	B.H. Tapped Screw B, 3x6
0415	1	1	1	2218274010	Reflector
0418	2	2	1	2218274030	Reflector
0420	1	1		2218302010	Dial
0421			1	2218302020	Dial
0423	2	2	2	53110303E9	Hexagon Nut
0424	2	2	2	51100308A9	B.H.M. Screw, B3x8
0426	1	1	1	2218401010	Frame
0428	2	2	2	51280308U0	B.H. Tapped Screw B, 3x8
0430	1	1	1	2218274020	Reflector
0432	2	2	2	51280306B0	B.H. Tapped Screw B, 3x6
0503	1	1	1	2219104500	Retainer K
0508	1	1	1	2219112010	Shaft
0513	1	1	1	59031405G9	Washer
0521	4	4	4	51470306A9	B.H.M. Screw S, 3x6
0602	1	1	1	2218051010	Guide
0604	2	2	2	51100306A9	B.H.M. Screw, B3x6
0606	6	6	6	51100306A9	B.H.M. Screw, B3x6
0607	2	2	2	51100306A9	B.H.M. Screw, B3x6
0608	2	2	2	51100306A9	B.H.M. Screw, B3x6
0611	2	2	2	51280306B0	B.H. Tapped Screw B, 3x6
0614	1	1	1	2218262500	Pulley K
0618	3	3	3	51280306B0	B.H. Tapped Screw B, 3x6
0621	3	3	3	2218262510	Pulley K
0625	2	2	2	51280306B0	B.H. Tapped Screw B, 3x6
0702	1	1	1	2218105012	Chassis
0704	1	1	1	2218105022	Chassis
0706	1	1	1	2218267022	Heatsink
0707	3	3	3	51280306B0	B.H. Tapped Screw B, 3x6
0708	3	3	3	51280306U0	B.H. Tapped Screw B, 3x6
0709	2	2	2	2218271020	Holder
0710	4	4	4	53250501A0	Special Nut
0712	2	2	2	51280312B0	B.H. Tapped Screw B, 3x12
0716	6	6	6	51280408B0	B.H. Tapped Screw B, 4x8
0718	4	4	4	53110401A9	Hexagon Nut
0719	4	4	4	54040402N0	Spring Washer
0721	1	1	1	2947267050	Heatsink
0722	1	1	1	53110303E9	Hexagon Nut
0723	1	1	1	51100308S9	B.H.M. Screw, B3x8
0726	1	1	1	2218123010	Contactor
0727	1	1	1	51280306B0	B.H. Tapped Screw B, 3x6
0731	1	1	1	2886005060	Clamper
0802	1	1	1	2218160050	Bracket
0803	6	6	6	51280306B0	B.H. Tapped Screw B, 3x6
0805	2	2	2	2218160060	Bracket
0806	4	4	4	51280306B0	B.H. Tapped Screw B, 3x6
0807	2	2	2	51280306B0	B.H. Tapped Screw B, 3x6
0818	2	2	2	2218160090	Bracket
0811	4	4	4	51280306B0	B.H. Tapped Screw B, 3x6
0812	2	2	2	51280306B0	B.H. Tapped Screw B, 3x6
0815	4	4	4	51100306S9	B.H.M. Screw, B3x6
0817	1	1	1	2908109022	Shield
0821	1	1	1	2218160080	Bracket
0822	4	4	4	51280306B0	B.H. Tapped Screw B, 3x6
0823	1	1	1	2218160040	Bracket
0824	2	2	2	51100306A0	B.H.M. Screw, B3x6
0825	5	5	5	51280306B0	B.H. Tapped Screw B, 3x6
0830	1	1	1	56382540G0	Eyelet
0902	2	2	2	2218267012	Heatsink
0906	2	2	2	2218160122	Bracket
0908	3	3	3	2963160100	Bracket
0910	6	6	6	51280406U0	B.H. Tapped Screw B, 4x6
0911	6	6	6	51280306U0	B.H. Tapped Screw B, 3x6
0912	8	8	8	51280408U0	B.H. Tapped Screw B, 4x8
0913	6	6	6	51280306B0	B.H. Tapped Screw B, 3x6

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
0916	1	1	1	2218160070	Bracket
0917	1	1	1	2218109010	Shield
0918	4	4	4	51280306B0	B.H. Tapped Screw B, 3x6
0919	4	4	4	51280306U0	B.H. Tapped Screw B, 3x6
0920	1	1	1	51280306B0	B.H. Tapped Screw B, 3x6
0921	1	1	1	51280406B0	B.H. Tapped Screw B, 4x6
0926	24	24	24	51100314B9	B.H.M. Screw, B3x14
0927	2	2	2	51100312S9	B.H. Tapped Screw, B3x12ST
0928	2	2	2	53110303E9	Hexagon Nut
0929	2	2	2	54020301A0	Flat Washer P
1002	4	4	4	2212267020	Heatsink
1003	4	4	4	51100306S9	B.H.M. Screw, B3x6
1004	6	6	6	51280308U0	B.H. Tapped Screw, B3x8ST
1009	4	4	4	2917267022	Heatsink
1010	4	4	4	51100308S9	B.H.M. Screw, B3x8
1011	4	4	4	53110303E9	Hexagon Nut
1102	1	1		2218160212	Bracket
1103			1	2218160220	Bracket
1106	1	1		2218271050	Holder
1107	1	1		2218258010	Hook
1108	1	1		2218257030	Lid
1109	2	2		51280308U0	B.H. Tapped Screw B, 3x8
1110	2	2		51280308U0	B.H. Tapped Screw B, 3x8
1121	12	12	12	51280308U0	B.H. Tapped Screw, B3x8ST
1122	2	2	2	51280308U0	B.H. Tapped Screw, B3x8ST
1123	4	4	4	51280308U0	B.H. Tapped Screw, B3x8ST
1126	1	1		1455259090	Bushing
1127			1	1455259040	Bushing
1131	8	8	8	51280306U0	B.H. Tapped Screw B, 3x6
1132	1	1	1	62040029W0	Lug
1202	10	10	10	62030049W0	Lug
1203	10	10	10	51280306B0	B.H. Tapped Screw, B3x6ST
1302	1			2218265010	Indicator
1303		1		2218265020	Indicator
1304			1	2218265030	Indicator
1310	2	2	2	51280306U0	B.H. Tapped Screw B, 3x6
1311		1		2911861170	Label, Do not use as handle.
1312	1		1	2506265060	Label, Do not use as handle.
1314		1		2911861110	Label
1315		1		2911861140	Label
1317	1		1	2578861010	Label, UL Caution
1318	1		1	2932861010	Label, Do not remove...
1321		1		9510911010	Label, LL No.
1322	1			9510911020	Label, UL Factory
1323	1			9511101020	Label, UL
1327		1		2911861310	Label, Fuse Caution
1328		1		2911861010	Label
1329		1		2911861190	Label
1404	1			2218851010	Instructions, Set
1406		1	1	2218851310	Instructions, Set
1409		1		2886851100	Instructions, Flysheet
1416	1	1	1	2218856010	Schematic Diagram
1422	1	1	1	2886861010	Label, On Power Transformer
1424	1			9510221010	Label, Fuse Caution
1425		1		2911861160	Label, Fuse Caution
1504	1			2577813010	Envelope
1505		1		2918813012	Envelope
1506			1	2818813010	Envelope
1511	1			2577851020	Instructions, Important
1512		1	1	2818851120	Instructions, Important
1516	1			2577854012	Guarantee Card
1517		1	1	9630000180	Guarantee Card
1521		1		9650000050	Service Station Card

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
1525	1			2818854023	Guarantee Card
1526		1		2818854042	Guarantee Card
1532	1			2818851040	Instructions, Packing
1533		1	1	2818851140	Instructions, Packing
1602	1	1	1	2218801010	Packing Case, Inner
1603	1	1	1	2218801110	Packing Case, Outer
1611	2	2	2	2219809010	Cushion
1616	1	1	1	9015555500	Polyethylene Bag, Set
1618	1	1	1	9013025010	Polyethylene Bag, Printed Matter
1619	1	1	1	9013025010	Polyethylene Bag, Accessories
1623	1	1	1	2864804010	Sleeve, AC Cord
1624			1	9560000042	Hang Tag
1626	1	1	1	2731821010	Silicagel
1628	1	1	1	2819056010	Buffer, AM Antenna
1702	4			9522815010	Serial No. Card
1703		4		9523015120	Serial No. Card
1704			4	9523015110	Serial No. Card
1714		2		9510901020	Label
1727	1	1	1	ZA02000070	External Antenna
					FM FRONT END CIRCUIT BOARD - P100
P100	1	1	1	YD22180020	P.W. Board (Print Only)
	1	1	1	AV01202080	FM Front End Assembly
					P100 - RESISTORS
R101	1	1	1	GD05473140	Fixed, 47kΩ ±5%, ¼W
R102	1	1	1	GD05123140	Fixed, 12kΩ ±5%, ¼W
R103	1	1	1	GD05473140	Fixed, 47kΩ ±5%, ¼W
R104	1	1	1	GD05223140	Fixed, 22kΩ ±5%, ¼W
R105	1	1	1	GD05101140	Fixed, 100Ω ±5%, ¼W
R106	1	1	1	GD05101140	Fixed, 100Ω ±5%, ¼W
R107	1	1	1	GD05182140	Fixed, 1.8kΩ ±5%, ¼W
R108	1	1	1	GD05473140	Fixed, 47kΩ ±5%, ¼W
R109	1	1	1	GD05123140	Fixed, 12kΩ ±5%, ¼W
R110	1	1	1	GD05473140	Fixed, 47kΩ ±5%, ¼W
R111	1	1	1	GD05101140	Fixed, 100Ω ±5%, ¼W
R112	1	1	1	GD05101140	Fixed, 100Ω ±5%, ¼W
R113	1	1	1	GD05473140	Fixed, 47kΩ ±5%, ¼W
R114	1	1	1	GD05561140	Fixed, 560Ω ±5%, ¼W
R115	1	1	1	GD05101140	Fixed, 100Ω ±5%, ¼W
R116	1	1	1	GD05331140	Fixed, 330Ω ±5%, ¼W
					P100 - CAPACITORS
C101	1	1	1	DD16150010	Ceramic, 15pF ±10%
C102	1	1	1	DD15470010	Ceramic, 47pF ±5%
C103	1	1	1	DD16101010	Ceramic, 100pF ±10%
C104	1	1	1	DK18203030	Ceramic, 0.02μF +80%, -20%
C105	1	1	1	DK18203030	Ceramic, 0.02μF +80%, -20%
C106	1	1	1	DK18203030	Ceramic, 0.02μF +80%, -20%
C107	1	1	1	DD16180020	Ceramic, 18pF ±10%
C108	1	1	1	DD16180020	Ceramic, 18pF ±10%
C109	1	1	1	DK18203030	Ceramic, 0.02μF +80%, -20%
C110	1	1	1	DK18203030	Ceramic, 0.02μF +80%, -20%
C111	1	1	1	DD16101010	Ceramic, 100pF ±10%
C112	1	1	1	DK18203030	Ceramic, 0.02μF +80%, -20%
C113	1	1	1	DK18203030	Ceramic, 0.02μF +80%, -20%
C114	1	1	1	DD12100010	Ceramic, 10pF ±10%
C115	1	1	1	DD16180020	Ceramic, 18pF ±10%
C116	1	1	1	DK18203030	Ceramic, 0.02μF +80%, -20%
C117	1	1	1	DD11080010	Ceramic, 8pF ±0.5pF

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
C118	1	1	1	DD10010020	Ceramic, 1pF ±0.5pF
C119	1	1	1	DD16150090	Ceramic, 15pF ±10%
C120	1	1	1	DD12100090	Ceramic, 10pF ±10%
C121	1	1	1	DK18203030	Ceramic, 0.02μF +80%, -20%
C122	1	1	1	CA53700010	Variable, FM-5, AM-3
C123	1	1	1	CT10500030	Trimmer, 3pF~8pF
					P100 - MISCELLANEOUS
Q101	1	1	1	HF400591A0	FET, 3SK59
Q102	1	1	1	HF400591A0	FET, 3SK59
Q103	1	1	1	HF400591A0	FET, 3SK59
Q104	1	1	1	HC10029050	IC, TA7301P
L105	1	1	1	LI71016060	IFT, FM
J101	1	1	1	YJ06001150	Plug
J102	1	1	1	YJ06001150	Plug
J103	1	1	1	YP10001510	Plug
J104	1	1	1	YP10001510	Plug
J105	1	1	1	YP10001510	Plug
					AM TUNER, FM IF & MPX STEREO DECODER CIRCUIT BOARD - P200
P200	1	1	1	YD22182060	P.W. Board (Print Only)
	1	1		ZZ22182060	P.W. Board Assembly
			1	ZZ22188060	P.W. Board Assembly
					P200 - RESISTORS-(A)
R151	1	1	1	RT05201140	Fixed, 200Ω ±5%, ¼W
R152	1	1	1	RT05302140	Fixed, 3kΩ ±5%, ¼W
R153	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R154	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R155	1	1	1	RT05301140	Fixed, 300Ω ±5%, ¼W
R156	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R157	1	1	1	RT05204140	Fixed, 200kΩ ±5%, ¼W
R158	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R159	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R160	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W
R161	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R162	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R163	1	1	1	RA01030250	Semifixed, 10kΩ
R165	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R166	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
					P200 - CAPACITORS-(A)
C151	1	1	1	DF17103010	Film, 0.01μF ±20%
C152	1	1	1	DF17102010	Film, 0.001μF ±20%
C153	1	1	1	DF17103010	Film 0.01μF ±20%
C155	1	1	1	DF17103010	Film, 0.01μF ±20%
C156	1	1	1	DF65391010	Film, 390pF ±5%
C157	1	1	1	DF17403010	Film, 0.04μF ±20%
C158	1	1	1	DD16101010	Ceramic, 100pF ±10%
C159	1	1	1	DF17403010	Film, 0.04μF ±20%
C160	1	1	1	DK17102010	Ceramic, 0.001μF ±20%
C161	1	1	1	EA47503590	Electrolytic, 47μF, 35V
C162	1	1	1	EA33505090	Electrolytic, 3.3μF, 50V
C163	1	1	1	DF17473010	Film, 0.047μF ±20%
C164	1	1	1	DF17103010	Film, 0.01μF ±20%
C165	1	1	1	DK17103010	Ceramic, 0.01μF ±20%
C166	1	1	1	EV10403560	Electrolytic, 0.1μF, 35V
C167	1	1	1	EV10503560	Electrolytic, 1μF, 35V
C168	1	1	1	DK17502010	Ceramic, 0.005μF ±20%
C169	1	1	1	EA10701690	Electrolytic, 100μF, 16V

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
C170	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C171	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C172	1	1	1	EA10701690	Electrolytic, 100μF, 16V
					P200 - SEMICONDUCTORS, COILS, TRANSFORMERS & FILTER-(A)
Q151	1	1	1	HC10019010	IC, HA1197
Q152	1	1	1	HT313272A0	Transistor, 2SC1327 S or T
L151	1	1	1	LA10010190	RF Coil
L152	1	1	1	LO10010480	OSC Coil
L153	1	1	1	LI10015010	IFT, AM
L154	1	1	1	LI10015060	IFT, AM
L155	1	1	1	LC13320020	Choke Coil
F151	1	1	1	FF10045160	Ceramic Filter, 455 kHz
					P200 - RESISTORS-(B)
R201	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R202	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R203	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R204	1	1	1	RT05202140	Fixed, 2kΩ ±5%, ¼W
R205	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R206	1	1	1	RT05201140	Fixed, 200Ω ±5%, ¼W
R207	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R208	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R209	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R210	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R211	1	1	1	RT05100140	Fixed, 10Ω ±5%, ¼W
R212	1	1	1	RT05151140	Fixed, 150Ω ±5%, ¼W
R213	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R214	1	1	1	RT05472140	Fixed, 4.7kΩ ±5%, ¼W
R215	1	1	1	RT05202140	Fixed, 2kΩ ±5%, ¼W
R216	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R217	1	1	1	RT05302140	Fixed, 3kΩ ±5%, ¼W
R218	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R219	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R220	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R221	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
R222	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R223	1	1	1	RT05471140	Fixed, 470Ω ±5%, ¼W
R224	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R225	1	1	1	RT05202140	Fixed, 2kΩ ±5%, ¼W
R226	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
R227	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R228	1	1	1	RT05151140	Fixed, 150Ω ±5%, ¼W
R229	1	1	1	RT05271140	Fixed, 270Ω ±5%, ¼W
R230	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R231	1	1	1	RT05471140	Fixed, 470Ω ±5%, ¼W
R232	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R233	1	1	1	RT05472140	Fixed, 4.7kΩ ±5%, ¼W
R234	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
R235	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R236	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
R237	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R238	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R239	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R240	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R241	1	1	1	RT05181140	Fixed, 180Ω ±5%, ¼W
R242	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R243	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R244	1	1	1	RT05561140	Fixed, 560Ω ±5%, ¼W
R245	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
R246	1	1	1	RT05472140	Fixed, 4.7kΩ ±5%, ¼W
R247	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R248	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R249	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
R250	1	1	1	RT05151140	Fixed, 150Ω ±5%, ¼W
R251	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R252	1	1	1	RT05822140	Fixed, 8.2kΩ ±5%, ¼W
R253	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R254	1	1	1	RT05821140	Fixed, 820Ω ±5%, ¼W
R255	1	1	1	RT05821140	Fixed, 820Ω ±5%, ¼W
R256	1	1	1	RT05682140	Fixed, 6.8kΩ ±5%, ¼W
R257	1	1	1	RT05682140	Fixed, 6.8kΩ ±5%, ¼W
R258	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R259	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
R260	1	1	1	RT05105140	Fixed, 1MΩ ±5%, ¼W
R261	1	1	1	RT05224140	Fixed, 220kΩ ±5%, ¼W
R262	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R263	1	1	1	RT05122140	Fixed, 1.2kΩ ±5%, ¼W
R264	1	1	1	RT05222140	Fixed, 2.2kΩ ±5%, ¼W
R265	1	1	1	RT05561140	Fixed, 560Ω ±5%, ¼W
R266	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R267	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R268	1	1	1	RT05564140	Fixed, 560kΩ ±5%, ¼W
R269	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
R270	1	1	1	RT05564140	Fixed, 560kΩ ±5%, ¼W
R271	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
R272	1	1	1	RT05221140	Fixed, 220Ω ±5%, ¼W
R273	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R274	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R275	1	1	1	RT05683140	Fixed, 68kΩ ±5%, ¼W
R276	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R277	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R278	1	1	1	RA01030250	Semifixed, 10kΩ
R279	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R282	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
					P200 - CAPACITORS-(B)
C201	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C202	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C203	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C204	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C205	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C206	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C207	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C208	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C209	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C210	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C211	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C212	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C213	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C214	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C215	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C216	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C217	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C218	1	1	1	DD16201010	Ceramic, 200pF ±10%
C219	1	1	1	DD16201010	Ceramic, 200pF ±10%
C220	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C221	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C222	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C223	1	1	1	EV22403560	Electrolytic, 0.22μF, 35V
C224	1	1	1	DD16201010	Ceramic, 200pF ±10%
C225	1	1	1	DD16201010	Ceramic, 200pF ±10%
C226	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C227	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
C228	1	1	1	DD16201010	Ceramic, 200pF ±10%
C229	1	1	1	DD16201010	Ceramic, 200pF ±10%
C230	1	1	1	DD16201010	Ceramic, 200pF ±10%
C231	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C232	1	1	1	DD16201010	Ceramic, 200pF ±10%
C233	1	1	1	DD16201010	Ceramic, 200pF ±10%
C234	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C235	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C236	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C237	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C238	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C239	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C240	1	1	1	DK17103010	Ceramic, 0.01μF±20%
C241	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C242	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C243	1	1	1	DD16201010	Ceramic, 200pF ±10%
C244	1	1	1	DD16201010	Ceramic, 200pF ±10%
C245	1	1	1	EA47601690	Electrolytic, 47μF, 16V
C246	1	1	1	EA10505090	Electrolytic, 1μF, 50V
C247	1	1	1	DD16201010	Ceramic, 200pF ±10%
C248	1	1	1	EA22601690	Electrolytic, 22μF, 16V
C249	1	1	1	EA47601690	Electrolytic, 47μF, 16V
C250	1	1	1	EA10701690	Electrolytic, 100μF, 16V
C251	1	1	1	DK18403010	Ceramic, 0.04μF +80%, -20%
C252	1	1	1	EA47601690	Electrolytic, 47μF, 16V
C253	1	1	1	EA10601690	Electrolytic, 10μF, 16V
C254	1	1	1	EA10601690	Electrolytic, 10μF, 16V
C255	1	1	1	EA10601690	Electrolytic, 10μF, 16V
C256	1	1	1	CT15000010	Trimmer, 50pF
C257	1	1	1	CT15000010	Trimmer, 50pF
C258	1	1	1	CT15000010	Trimmer, 50pF
C259	1	1	1	CT15000010	Trimmer, 50pF
C260	1	1	1	CT15000010	Trimmer, 50pF
C261	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
C262	1	1	1	DK18403020	Ceramic, 0.04μF +80%, -20%
					P200 - SEMICONDUCTORS, COILS, TRANSFORMERS & FILTERS-(B)
Q201	1	1	1	HT310471C0	Transistor, 2SC1047 (C)
Q202	1	1	1	HC10011060	IC, μPC555H
Q203	1	1	1	HC10019030	IC, LA1222
Q204	1	1	1	HT308291C0	Transistor, 2SC829 (C)
Q205	1	1	1	HC10019030	IC, LA1222
Q206	1	1	1	HT308291C0	Transistor, 2SC829 (C)
Q207	1	1	1	HD20011050	Diode, 1S1555
Q208	1	1	1	HD20011050	Diode, 1S1555
Q209	1	1	1	HT313272A0	Transistor, 2SC1327 S or T
Q210	1	1	1	HT108422A0	Transistor, 2SA842 GR or BL
Q211	1	1	1	HT308291C0	Transistor, 2SC829 (C)
Q212	1	1	1	HD10003020	Diode, 20A90
Q213	1	1	1	HD10003020	Diode, 20A90
Q214	1	1	1	HD10003020	Diode, 20A90
Q215	1	1	1	HD10003020	Diode, 20A90
Q216	1	1	1	HT308291C0	Transistor, 2SC829 (C)
Q217	1	1	1	HD10003020	Diode, 20A90
Q218	1	1	1	HD10003020	Diode, 20A90
Q219	1	1	1	HT308291C0	Transistor, 2SC829 (C)
Q220	1	1	1	HD10003020	Diode, 20A90
Q221	1	1	1	HD10003020	Diode, 20A90
Q222	1	1	1	HT309452B0	Transistor, 2SC945 Q or P
Q223	1	1	1	HD10003020	Diode, 20A90

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
L201	1	1	1	LI14016230	IFT, FM (Detector)
L202	1	1	1	LC12230020	Choke Coil, 22μH
L203	1	1	1	LC12230020	Choke Coil, 22μH
L204	1	1	1	LC13320020	Choke Coil, 3.3μH
L205	1	1	1	LC13320020	Choke Coil, 3.3μH
L206	1	1	1	LC13320020	Choke Coil, 3.3μH
F201	1	1	1	FF11070050	Ceramic Filter, 10.7MHz
F202	1	1	1	FF11070050	Ceramic Filter, 10.7MHz
F203	1	1	1	FF11070050	Ceramic Filter, 10.7MHz
F204	1	1	1	FF11070050	Ceramic Filter, 10.7MHz
F205	1	1	1	FF11070050	Ceramic Filter, 10.7MHz
					P200 - RESISTORS-(C)
R301	1	1	1	RT05272140	Fixed, 2.7kΩ ±5%, ¼W
R302	1	1	1	RT05272140	Fixed, 2.7kΩ ±5%, ¼W
R303	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R304	1	1	1	RT05392140	Fixed, 3.9kΩ ±5%, ¼W
R305	1	1	1	RT05392140	Fixed, 3.9kΩ ±5%, ¼W
R306	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R307	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R308	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R309	1	1	1	RT05163140	Fixed, 16kΩ ±5%, ¼W
R310	1	1	1	RA04720050	Semifixed, 4.7kΩ
R311	1	1	1	RT05272140	Fixed, 2.7kΩ ±5%, ¼W
R312	1	1	1	RT05512140	Fixed, 5.1kΩ ±5%, ¼W
R313	1	1	1	RT05512140	Fixed, 5.1kΩ ±5%, ¼W
R314	1	1	1	RT05202140	Fixed, 2.0kΩ ±5%, ¼W
R315	1	1	1	RT05202140	Fixed, 2.0kΩ ±5%, ¼W
R316	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W
R317	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W
R318	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R319	1	1	1	RA05030120	Semifixed, 50kΩ
R320	1	1	1	RT05204140	Fixed, 200kΩ ±5%, ¼W
R321	1	1	1	RT05303140	Fixed, 30kΩ ±5%, ¼W
R322	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R323	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R324	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R325	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
R326	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
R327	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R328	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R329	1	1	1	RT05222140	Fixed, 2.2kΩ ±5%, ¼W
R330	1	1	1	RA01030250	Semifixed, 10kΩ
R331	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R332	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R333	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R334	1	1	1	RA01040180	Semifixed, 100kΩ
R335	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R336	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R337	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W
R338	1	1	1	RT05564140	Fixed, 560kΩ ±5%, ¼W
R339	1	1	1	RT05333140	Fixed, 33kΩ ±5%, ¼W
R340	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R341	1	1	1	RT05154140	Fixed, 150kΩ ±5%, ¼W
R342	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R343	1	1	1	RT05224140	Fixed, 220kΩ ±5%, ¼W
R344	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
R345	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R346	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R347	1	1	1	RA01040180	Semifixed, 100kΩ
R348	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
					P200 - CAPACITORS-(C)
C311			1	DF15562050	Film, 5600pF ±5%

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
C312			1	DF15562050	Film, 5600pF ±5%
C301	1	1	1	DF55471010	Film, 470pF ±5%
C302	1	1	1	DF55911010	Film, 910pF ±5%
C303	1	1	1	DF55681010	Film, 680pF ±5%
C304	1	1	1	DF55152030	Film, 1500pF ±5%
C305	1	1	1	EA22601690	Electrolytic, 22μF, 16V
C306	1	1	1	DF17473010	Film, 0.047μF ±20%
C307	1	1	1	EQ22405010	Electrolytic, 0.22μF ±20%
C308	1	1	1	EQ47405010	Electrolytic, 0.47μF ±20%
C309	1	1	1	EQ22405010	Electrolytic, 0.22μF ±20%
C310	1	1	1	DF55471010	Film, 470pF ±5%
C311	1	1		DF15272050	Film, 2700pF ±5%
C312	1	1		DF15272050	Film, 2700pF ±5%
C313	1	1		DF15562050	Film, 5600pF ±5%
C314	1	1		DF15562050	Film, 5600pF ±5%
C315	1	1	1	EA10601690	Electrolytic, 10μF, 16V
C316	1	1	1	EA10601690	Electrolytic, 10μF, 16V
C317	1	1	1	EA10701690	Electrolytic, 100μF, 16V
C318	1	1	1	EA10701690	Electrolytic, 0.1μF, 35V
C319	1	1	1	EV10403560	Electrolytic, 0.1μF, 35V
C320	1	1	1	EV10503560	Electrolytic, 1μF, 35V
C321	1	1	1	EV10503560	Electrolytic, 1μF, 35V
C322	1	1	1	EV10503560	Electrolytic, 1μF, 35V
					P200 - SEMICONDUCTORS & COILS-(C)
Q301	1	1	1	HC10004010	IC, HA1156
Q302	1	1	1	HT108422A0	Transistor, 2SA842 GR or BL
Q303	1	1	1	HT108422A0	Transistor, 2SA842 GR or BL
Q304	1	1	1	HT309452B0	Transistor, 2SC945 Q or P
Q305	1	1	1	HT107331Q0	Transistor, 2SA733 Q
Q306	1	1	1	HF200300A0	FET, 2SK30
Q307	1	1	1	HT309452B0	Transistor, 2SC945 Q or P
Q308	1	1	1	HT309452B0	Transistor, 2SC945 Q or P
Q309	1	1	1	HT309452B0	Transistor, 2SC945 Q or P
Q310	1	1	1	HT309452B0	Transistor, 2SC945 Q or P
Q311	1	1	1	HT309452B0	Transistor, 2SC945 Q or P
Q312	1	1	1	HT309452B0	Transistor, 2SC945 Q or P
Q313	1	1	1	HD20011050	Diode, 1S1555
L301	1	1	1	LS10290160	Antibirde Coil
L302	1	1	1	LS10290170	Antibirde Coil
L303	1	1	1	LS10290180	Antibirde Coil
L304	1	1	1	LS35035010	LPF Coil
					P200 - MISCELLANEOUS
P208	12	12	12	2933118020	Spacer
P211	12	12	12	75061251P0	Jumper Wire
J201	1	1	1	YP10001130	Plug
J202	1	1	1	YP10001130	Plug
J203	1	1	1	YP10001130	Plug
J204	1	1	1	YP10001130	Plug
J205	1	1	1	YP10001130	Plug
J206	1	1	1	YP06000570	Plug
J207	1	1	1	YP06000570	Plug
J209	1	1	1	YP10001130	Plug
J210	1	1	1	YP10001130	Plug
J211	1	1	1	YP10001130	Plug
J212	1	1	1	YP10001130	Plug
J213	1	1	1	YP10001130	Plug
J216	1	1	1	YP10001130	Plug
J217	1	1	1	YP10001130	Plug
J218	1	1	1	YP06000570	Plug
J221	1	1	1	YP10001130	Plug

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
J223 ~ J234	12	12	12	YP10001130	Plug
J235	1	1	1	YP06000570	Plug
J236	1	1	1	YP10001130	Plug
J238	1	1	1	YP10001130	Plug
J239	1	1	1	YP10001130	Plug
J240	1	1	1	YP10001130	Plug
					FM NOISE AMP CIRCUIT BOARD - PB00
PB00	1	1	1	YA22180610	P.W. Board (Print Only)
	1	1	1	ZZ22180610	P.W. Board Assembly
					PB00 - RESISTORS
RB01	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
RB02	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
RB03	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
RB04	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
RB05	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
RB06	1	1	1	RT05333140	Fixed, 33kΩ ±5%, ¼W
RB07	1	1	1	RT05221140	Fixed, 220Ω ±5%, ¼W
RB08	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
RB09	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
					PB00 - CAPACITORS
CB01	1	1	1	DD12100010	Ceramic, 10pF
CB02	1	1	1	DF16683010	Film, 0.068μF
CB03	1	1	1	DF17403010	Film, 0.04μF
CB04	1	1	1	DK18104020	Ceramic, 0.1μF
CB05	1	1	1	DK18403020	Ceramic, 0.04μF
CB06	1	1	1	EA10601690	Electrolytic, 10μF, 16V
					PB00 - MISCELLANEOUS
QB01	1	1	1	HT308281D0	Transistor, 2SC828S
QB02	1	1	1	HT308281D0	Transistor, 2SC828S
QB03	1	1	1	HD10001050	Diode, 1N60
QB04	1	1	1	HD10001050	Diode, 1N60
L801	1	1	1	LC21050010	Choke Coil, 1mH
JB01 ~ JB04	4	4	4	YP10001130	Plug
					FM BUFFER AMP CIRCUIT BOARD - PC00
PC00	1	1	1	YA22180220	P.W. Board (Print Only)
	1	1	1	ZZ22180220	P.W. Board Assembly
					PC00 - RESISTORS
RC01	1	1	1	RA05020200	Semifixed, 5kΩ
RC02	1	1	1	RA05020200	Semifixed, 5kΩ
RC03	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
RC04	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
RC05	1	1	1	RT05155140	Fixed, 1.5MΩ±5%, ¼W
RC06	1	1	1	RT05155140	Fixed, 1.5MΩ±5%, ¼W
RC07	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
RC08	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
RC09	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
RC10	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
RC11	1	1	1	RT05681140	Fixed, 680Ω ±5%, ¼W

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
RC12	1	1	1	RT05681140	Fixed, 680Ω ±5%, ¼W
RC13	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
RC14	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
RC15	1	1	1	RT05272140	Fixed, 2.7kΩ ±5%, ¼W
RC16	1	1	1	RT05272140	Fixed, 2.7kΩ ±5%, ¼W
RC17	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
RC18	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
RC19	1	1	1	RT05561140	Fixed, 560Ω ±5%, ¼W
RC20	1	1	1	RT05561140	Fixed, 560Ω ±5%, ¼W
RC21	1	1	1	RT05224140	Fixed, 220kΩ±5%, ¼W
RC22	1	1	1	RT05224140	Fixed, 220kΩ±5%, ¼W
RC23	1	1	1	RT05224140	Fixed, 220kΩ±5%, ¼W
RC24	1	1	1	RT05224140	Fixed, 220kΩ±5%, ¼W
RC25	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
RC26	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
RC27	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
RC28	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
					PC00 - CAPACITORS
CC01	1	1	1	EV47403560	Electrolytic, 0.47μF, 35V
CC02	1	1	1	EV47403560	Electrolytic, 0.47μF, 35V
CC03	1	1	1	EV10503560	Electrolytic, 1μF, 35V
CC04	1	1	1	EV10503560	Electrolytic, 1μF, 35V
CC05	1	1	1	EV10503560	Electrolytic, 1μF, 35V
CC06	1	1	1	EV10503560	Electrolytic, 1μF, 35V
CC07	1	1	1	EA22702590	Electrolytic, 220μF, 25V
CC08	1	1	1	EA47503590	Electrolytic, 4.7μF, 35V
					PC00 - SEMICONDUCTORS
QC01	1	1	1	HT313272A0	Transistor, 2SC1327 S or T
QC02	1	1	1	HT313272A0	Transistor, 2SC1327 S or T
QC03	1	1	1	HT108422A0	Transistor, 2SA842 GR or BL
QC04	1	1	1	HT108422A0	Transistor, 2SA842 GR or BL
QC05	1	1	1	HT309452B0	Transistor, 2SC945 P or Q
QC06	1	1	1	HD20011050	Diode, 1S1555
					PC00 - MISCELLANEOUS
PC08	4	4	4	2933118020	Spacer
PC11	3	3	3	75061251P0	Jumper Wire
LC01	1	1	1	LY20240120	Relay, 24V
JC01 ~ JC14	14	14	14	YP10001130	Plug
					PHONO AMP & SELECTOR SWITCH CIRCUIT BOARD - P400
P400	1	1	1	YA22180250	P.W. Board (Print Only)
	1	1		ZZ22180250	P.W. Board Assembly
			1	ZZ22188250	P.W. Board Assembly
					P400 - RESISTORS
R401	1	1	1	RN05753140	Fixed, 75kΩ ±5%, ¼W
R402	1	1	1	RN05753140	Fixed, 75kΩ ±5%, ¼W
R403	1	1	1	RN05154140	Fixed, 150kΩ±5%, ¼W
R404	1	1	1	RN05154140	Fixed, 150kΩ±5%, ¼W
R405	1	1	1	RT05222140	Fixed, 2.2kΩ ±5%, ¼W
R406	1	1	1	RT05222140	Fixed, 2.2kΩ ±5%, ¼W
R407	1	1	1	RN05123140	Fixed, 12kΩ ±5%, ¼W
R408	1	1	1	RN05123140	Fixed, 12kΩ ±5%, ¼W
R409	1	1	1	RN05154140	Fixed, 150kΩ±5%, ¼W
R410	1	1	1	RN05154140	Fixed, 150kΩ±5%, ¼W
R411	1	1	1	RT05911140	Fixed, 910Ω ±5%, ¼W

U: For U.S.A.
C: For Canada
E: For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
R412	1	1	1	RT05911140	Fixed, 910Ω ±5%, ¼W
R413	1	1	1	RN05115140	Fixed, 1.1MΩ±5%, ¼W
R414	1	1	1	RN05115140	Fixed, 1.1MΩ±5%, ¼W
R415	1	1	1	RT05683140	Fixed, 68kΩ ±5%, ¼W
R416	1	1	1	RT05683140	Fixed, 68kΩ ±5%, ¼W
R417	1	1	1	RT05431140	Fixed, 430Ω ±5%, ¼W
R418	1	1	1	RT05431140	Fixed, 430Ω ±5%, ¼W
R419	1	1	1	RT05111140	Fixed, 110Ω ±5%, ¼W
R420	1	1	1	RT05111140	Fixed, 110Ω ±5%, ¼W
R421	1	1	1	RT05560140	Fixed, 56Ω ±5%, ¼W
R422	1	1	1	RT05560140	Fixed, 56Ω ±5%, ¼W
R423	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
R424	1	1	1	RT05152140	Fixed, 1.5kΩ ±5%, ¼W
R425	1	1	1	RT05363140	Fixed, 36kΩ ±5%, ¼W
R426	1	1	1	RT05363140	Fixed, 36kΩ ±5%, ¼W
R427	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R428	1	1	1	RT05331140	Fixed, 330Ω ±5%, ¼W
R429	1	1	1	RT05274140	Fixed, 270kΩ±5%, ¼W
R430	1	1	1	RT05274140	Fixed, 270kΩ±5%, ¼W
R431	1	1	1	GJ05331010	Fixed, 330Ω ±5%, 1W
R432	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R433	1	1		RT05104140	Fixed, 100kΩ±5%, ¼W
R434	1	1		RT05104140	Fixed, 100kΩ±5%, ¼W
R435	1	1	1	RT05222140	Fixed, 2.2kΩ ±5%, ¼W
R436	1	1	1	RT05222140	Fixed, 2.2kΩ ±5%, ¼W
R437	1	1	1	RT05222140	Fixed, 2.2kΩ ±5%, ¼W
					P400 - CAPACITORS
C401	1	1	1	EE47502510	Electrolytic, 4.7μF ±20%, 25V
C402	1	1	1	EE47502510	Electrolytic, 4.7μF ±20%, 25V
C403	1	1	1	DD15390010	Ceramic, 39pF ±5%, 50V
C404	1	1	1	DD15390010	Ceramic, 39pF ±5%, 50V
C405	1	1	1	DD15331010	Ceramic, 330pF±5%, 50V
C406	1	1	1	DD15331010	Ceramic, 330pF±5%, 50V
C407	1	1	1	DD15331010	Ceramic, 330pF±5%, 50V
C408	1	1	1	DD15331010	Ceramic, 330pF±5%, 50V
C409	1	1	1	EE33601040	Electrolytic, 33μF ±20%, 10V
C410	1	1	1	EE33601040	Electrolytic, 33μF ±20%, 10V
C411	1	1	1	DF15332010	Film, 3300pF±5%, 50V
C412	1	1	1	DF15332010	Film, 3300pF±5%, 50V
C413	1	1	1	DF15102010	Film, 1000pF±5%, 50V
C414	1	1	1	DF15102010	Film, 1000pF±5%, 50V
C415	1	1	1	DD11040010	Ceramic, 4pF ±0.5pF, 50V
C416	1	1	1	DD11040010	Ceramic, 4pF ±0.5pF, 50V
C417	1	1	1	EE47502510	Electrolytic, 4.7μF ±20%, 25V
C418	1	1	1	EE47502510	Electrolytic, 4.7μF ±20%, 25V
C419	1	1	1	DF16562010	Film, 5600pF±10%, 50V
C420	1	1	1	DF16562010	Film, 5600pF±10%, 50V
C421	1	1	1	DD15101010	Ceramic, 100pF±5%, 50V
C422	1	1	1	DD15101010	Ceramic, 100pF±5%, 50V
C423	1	1	1	DD15101010	Ceramic, 100pF±5%, 50V
C424	1	1	1	DD15101010	Ceramic, 100pF±5%, 50V
C425	1	1	1	EA10703590	Electrolytic, 100μF +100%, -10%, 35V
C426	1	1	1	EA10703590	Electrolytic, 100μF +100%, -10%, 35V
					P400 - SEMICONDUCTORS
Q401	1	1	1	HT108722D0	Transistor, 2SA872A D or E
Q402	1	1	1	HT108722D0	Transistor, 2SA872A D or E
Q403	1	1	1	HT108722D0	Transistor, 2SA872A D or E
Q404	1	1	1	HT108722D0	Transistor, 2SA872A D or E
Q405	1	1	1	HT317752E0	Transistor, 2SC1775A E or F
Q406	1	1	1	HT317752E0	Transistor, 2SC1775A E or F
Q407	1	1	1	HT108722E0	Transistor, 2SA872A E or F

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
Q408	1	1	1	HT108722E0	Transistor, 2SA872A E or F
Q409	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q410	1	1	1	HT107332A0	Transistor, 2SA733 Q or R
Q411	1	1	1	HD20001210	Diode, 1S2473
Q412	1	1	1	HD20004130	Diode, SIB01-02
					P400 - MISCELLANEOUS
J401 ~ J414	14	14	14	YP06001040	Plug, 3P
J415	1	1	1	YJ06000460	Jack, 4P
J416	1	1	1	YJ06000740	Jack, 3P
J417	1	1		YP06001040	Plug, 3P
J418	1	1	1	YP06001040	Plug, 3P
S401	1	1		SR13060020	Rotary Switch, Selector
S401			1	SR11060020	Rotary Switch, Selector
S402	1	1	1	SR04050110	Rotary Switch, Mode
P410	14	14	14	75061251P0	Jumper Wire
P412			1	75060501P0	Jumper Wire
					MAIN AMP & PEAK INDICATOR CIRCUIT BOARD - P700
P700	1	1	1	YD22182080	P.W. Board (Print Only)
	1	1	1	ZZ22182080	P.W. Board Assembly
					P700 - RESISTORS
R701	1	1	1	RT05474140	Fixed, 470kΩ±5%, ¼W
R702	1	1	1	RT05474140	Fixed, 470kΩ±5%, ¼W
R703	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R704	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R705	1	1	1	RT05513140	Fixed, 51kΩ ±5%, ¼W
R706	1	1	1	RT05513140	Fixed, 51kΩ ±5%, ¼W
R707	1	1	1	RT05243140	Fixed, 24kΩ ±5%, ¼W
R708	1	1	1	RT05243140	Fixed, 24kΩ ±5%, ¼W
R709	1	1	1	RT05243140	Fixed, 24kΩ ±5%, ¼W
R710	1	1	1	RT05243140	Fixed, 24kΩ ±5%, ¼W
R711	1	1	1	RT05822140	Fixed, 8.2kΩ ±5%, ¼W
R712	1	1	1	RT05822140	Fixed, 8.2kΩ ±5%, ¼W
R713	1	1	1	RT05222140	Fixed, 2.2kΩ ±5%, ¼W
R714	1	1	1	RT05222140	Fixed, 2.2kΩ ±5%, ¼W
R715	1	1	1	RT05472140	Fixed, 4.7kΩ ±5%, ¼W
R716	1	1	1	RT05472140	Fixed, 4.7kΩ ±5%, ¼W
R717	1	1	1	RT05242140	Fixed, 2.4kΩ ±5%, ¼W
R718	1	1	1	RT05242140	Fixed, 2.4kΩ ±5%, ¼W
R719	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R720	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R721	1	1	1	RT05154140	Fixed, 150kΩ±5%, ¼W
R722	1	1	1	RT05154140	Fixed, 150kΩ±5%, ¼W
R723	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
R724	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
R725	1	1	1	RT05302140	Fixed, 3kΩ ±5%, ¼W
R726	1	1	1	RT05302140	Fixed, 3kΩ ±5%, ¼W
R727	1	1	1	RT05394140	Fixed, 390kΩ±5%, ¼W
R728	1	1	1	RT05394140	Fixed, 390kΩ±5%, ¼W
R729	1	1	1	RA02020130	Semifixed, 2kΩ (B)
R730	1	1	1	RA02020130	Semifixed, 2kΩ (B)
R731	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
R732	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
R733	1	1	1	GF05202140	Fixed, 2kΩ ±5%, ¼W
R734	1	1	1	GF05202140	Fixed, 2kΩ ±5%, ¼W

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
R735	1	1	1	GF05202140	Fixed, 2kΩ ±5%, ¼W
R736	1	1	1	GF05202140	Fixed, 2kΩ ±5%, ¼W
R737	1	1	1	GF05202140	Fixed, 2kΩ ±5%, ¼W
R738	1	1	1	GF05202140	Fixed, 2kΩ ±5%, ¼W
R739	1	1	1	GF05202140	Fixed, 2kΩ ±5%, ¼W
R740	1	1	1	GF05202140	Fixed, 2kΩ ±5%, ¼W
R741	1	1	1	GF05202140	Fixed, 2kΩ ±5%, ¼W
R742	1	1	1	GF05202140	Fixed, 2kΩ ±5%, ¼W
R743	1	1	1	GF05151140	Fixed, 150Ω ±5%, ¼W
R744	1	1	1	GF05151140	Fixed, 150Ω ±5%, ¼W
R745	1	1	1	GF05151140	Fixed, 150Ω ±5%, ¼W
R746	1	1	1	GF05151140	Fixed, 150Ω ±5%, ¼W
R747	1	1	1	RA01020200	Semifixed, 1kΩ (B)
R748	1	1	1	RA01020200	Semifixed, 1kΩ (B)
R749	1	1	1	RT05151140	Fixed, 150Ω ±5%, ¼W
R750	1	1	1	RT05151140	Fixed, 150Ω ±5%, ¼W
R751	1	1	1	GF05111140	Fixed, 110Ω ±5%, ¼W
R752	1	1	1	GF05111140	Fixed, 110Ω ±5%, ¼W
R753	1	1	1	RT05753140	Fixed, 75kΩ ±5%, ¼W
R754	1	1	1	RT05753140	Fixed, 75kΩ ±5%, ¼W
R755	1	1	1	GJ05100030	Fixed, 10Ω ±5%, 3W
R756	1	1	1	GJ05100030	Fixed, 10Ω ±5%, 3W
R757	1	1	1	GJ05010010	Fixed, 1Ω ±5%, 1W
R758	1	1	1	GJ05010010	Fixed, 1Ω ±5%, 1W
R759	1	1	1	GF05161140	Fixed, 160Ω ±5%, ¼W
R760	1	1	1	GF05161140	Fixed, 160Ω ±5%, ¼W
R761	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R762	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R763	1	1	1	GF05201140	Fixed, 200Ω ±5%, ¼W
R764	1	1	1	GF05201140	Fixed, 200Ω ±5%, ¼W
R765	1	1	1	GF05121140	Fixed, 120Ω ±5%, ¼W
R766	1	1	1	GF05121140	Fixed, 120Ω ±5%, ¼W
R767	1	1	1	GF05201140	Fixed, 200Ω ±5%, ¼W
R768	1	1	1	GF05201140	Fixed, 200Ω ±5%, ¼W
R769	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R770	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
R771	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
R772	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
R773	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
R774	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
R775	1	1	1	RT05243140	Fixed, 24kΩ ±5%, ¼W
R776	1	1	1	RT05243140	Fixed, 24kΩ ±5%, ¼W
R777	1	1	1	GJ05022010	Fixed, 2.2Ω ±5%, 1W
R778	1	1	1	GJ05022010	Fixed, 2.2Ω ±5%, 1W
R779	1	1	1	GF05221120	Fixed, 220Ω ±5%, ½W
R780	1	1	1	GF05221120	Fixed, 220Ω ±5%, ½W
R781	1	1	1	GJ05022010	Fixed, 2.2Ω ±5%, 1W
R782	1	1	1	GJ05022010	Fixed, 2.2Ω ±5%, 1W
R783	1	1	1	GF05100140	Fixed, 10Ω ±5%, ¼W
R784	1	1	1	GF05100140	Fixed, 10Ω ±5%, ¼W
R785	1	1	1	GJ05022020	Fixed, 2.2Ω ±5%, 2W
R786	1	1	1	GJ05022020	Fixed, 2.2Ω ±5%, 2W
R787	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W
R788	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W
R789	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W
R790	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W
R791	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W
R792	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W
R793	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W
R794	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W
R795	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W
R796	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W
R797	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
R798	1	1	1	GW10682050	Fixed, 0.68Ω ±10%, 5W
R799	1	1	1	GF05822140	Fixed, 8.2kΩ ±5%, ¼W
R800	1	1	1	GF05822140	Fixed, 8.2kΩ ±5%, ¼W
R801	1	1	1	RT05512140	Fixed, 5.1kΩ ±5%, ¼W
R802	1	1	1	RT05512140	Fixed, 5.1kΩ ±5%, ¼W
R803	1	1	1	RT05753140	Fixed, 75kΩ ±5%, ¼W
R804	1	1	1	RT05753140	Fixed, 75kΩ ±5%, ¼W
R805	1	1	1	GF05511140	Fixed, 510Ω ±5%, ¼W
R806	1	1	1	GF05511140	Fixed, 510Ω ±5%, ¼W
R807	1	1	1	GJ05682020	Fixed, 6.8kΩ ±5%, 2W
R808	1	1	1	GJ05682020	Fixed, 6.8kΩ ±5%, 2W
R809	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R810	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R811	1	1	1	RT05243140	Fixed, 24kΩ ±5%, ¼W
R812	1	1	1	RT05243140	Fixed, 24kΩ ±5%, ¼W
R813	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R814	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R815	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R816	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R817	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R818	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
R819	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R820	1	1	1	RT05153140	Fixed, 15kΩ ±5%, ¼W
R821	1	1	1	RT05242140	Fixed, 2.4kΩ ±5%, ¼W
R822	1	1	1	RT05242140	Fixed, 2.4kΩ ±5%, ¼W
R823	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R824	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
R825	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R826	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R827	1	1	1	RT05393140	Fixed, 39kΩ ±5%, ¼W
R828	1	1	1	RT05393140	Fixed, 39kΩ ±5%, ¼W
R829	1	1	1	RT05303140	Fixed, 30kΩ ±5%, ¼W
R830	1	1	1	RT05303140	Fixed, 30kΩ ±5%, ¼W
R831	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R832	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
R833	1	1	1	GF05100140	Fixed, 10Ω ±5%, ¼W
R834	1	1	1	GF05100140	Fixed, 10Ω ±5%, ¼W
R835	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
R836	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
R837	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
R838	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
R839	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
R840	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
					P700 - CAPACITORS
C701	1	1	1	EE22503510	Electrolytic, 2.2μF ±20%, 35V
C702	1	1	1	EE22503510	Electrolytic, 2.2μF ±20%, 35V
C703	1	1	1	DD16101010	Ceramic, 100pF±10%, 50V
C704	1	1	1	DD16101010	Ceramic, 100pF±10%, 50V
C705	1	1	1	DD15100500	Ceramic, 10pF±10%, 500V
C706	1	1	1	DD15100500	Ceramic, 10pF±10%, 500V
C707	1	1	1	EA47505090	Electrolytic, 4.7μF +100%, -10%, 50V
C708	1	1	1	EA47505090	Electrolytic, 4.7μF +100%, -10%, 50V
C709	1	1	1	EA47405090	Electrolytic, 0.47μF +100%, -10%, 50V
C710	1	1	1	EA47405090	Electrolytic, 0.47μF +100%, -10%, 50V
C711	1	1	1	EA10701690	Electrolytic, 100μF +100%, -10%, 16V
C712	1	1	1	EA10701690	Electrolytic, 100μF +100%, -10%, 16V
C715	1	1	1	DD10030500	Ceramic, 3pF ±0.5pF, 16V

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
C716	1	1	1	DD10030500	Ceramic, 3pF ±0.5pF, 16V
C717	1	1	1	DF17104050	Film, 0.1μF ±20%, 16V
C718	1	1	1	DF17104050	Film, 0.1μF ±20%, 16V
C719	1	1	1	DF17104520	Film, 0.1μF ±20%, 200V
C720	1	1	1	DF17104520	Film, 0.1μF ±20%, 200V
C721	1	1	1	DF17104540	Film, 0.1μF ±20%, 100V
C722	1	1	1	DF17104540	Film, 0.1μF ±20%, 100V
C723	1	1	1	DF16104010	Film, 0.1μF ±10%, 50V
C724	1	1	1	DF16104010	Film, 0.1μF ±10%, 50V
C725	1	1	1	EE10505010	Electrolytic, 1μF ±20%, 50V
C726	1	1	1	EE10505010	Electrolytic, 1μF ±20%, 50V
C727	1	1	1	EE10505010	Electrolytic, 1μF ±20%, 50V
C728	1	1	1	EE10505010	Electrolytic, 1μF ±20%, 50V
C729	1	1	1	DF16104010	Film, 0.1μF ±10%, 50V
C730	1	1	1	DF16104010	Film, 0.1μF ±10%, 50V
C731	1	1	1	DK16221510	Ceramic, 220pF±10%, 500V
C732	1	1	1	DK16221510	Ceramic, 220pF±10%, 500V
C733	1	1	1	DF17104540	Film, 0.1μF ±20%, 100V
C734	1	1	1	DF17104540	Film, 0.1μF ±20%, 100V
C735	1	1	1	DF17104540	Film, 0.1μF ±20%, 100V
C736	1	1	1	DF17104540	Film, 0.1μF ±20%, 100V
C737	1	1	1	DK16221510	Ceramic, 220pF±10%, 500V
C738	1	1	1	DK16221510	Ceramic, 220pF±10%, 500V
C741	1	1	1	EA10505090	Electrolytic, 1μF +100%, -10%, 50V
C742	1	1	1	EA10505090	Electrolytic, 1μF +100%, -10%, 50V
C743	1	1	1	DF17104540	Film, 0.1μF ±20%, 100V
C744	1	1	1	DF17104540	Film, 0.1μF ±20%, 100V
C745	1	1	1	DK16221510	Ceramic, 220pF±10%, 500V
C746	1	1	1	DK16221510	Ceramic, 220pF±10%, 500V
C747	1	1	1	DD10030500	Ceramic, 3pF ±0.5pF, 500V
C748	1	1	1	DD10030500	Ceramic, 3pF ±0.5pF, 500V
C749	1	1	1	DF16222010	Film, 0.0022μF±10%, 50V
C750	1	1	1	DF16222010	Film, 0.0022μF±10%, 50V
C751	1	1	1	DF16222010	Film, 0.0022μF±10%, 50V
C752	1	1	1	DF16222010	Film, 0.0022μF±10%, 50V
C753	1	1	1	DD15500500	Ceramic, 50pF ±5%, 500V
C754	1	1	1	DD15500500	Ceramic, 50pF ±5%, 500V
C755	1	1	1	EA10610010	Electrolytic, 10μF +100%, -10%, 100V
C756	1	1	1	EA10610010	Electrolytic, 10μF +100%, -10%, 100V
C759	1	1	1	DF15152010	Film, 0.0015μF ±5%, 50V
C760	1	1	1	DF15152010	Film, 0.0015μF ±5%, 50V
					P700 - SEMICONDUCTORS
Q701	1	1	1	HT317752E0	Transistor, 2SC1775A E or F
Q702	1	1	1	HT317752E0	Transistor, 2SC1775A E or F
Q703	1	1	1	HT317752E0	Transistor, 2SC1775A E or F
Q704	1	1	1	HT317752E0	Transistor, 2SC1775A E or F
Q705	1	1	1	HT317752D0	Transistor, 2SC1775A D or E
Q706	1	1	1	HT317752D0	Transistor, 2SC1775A D or E
Q707	1	1	1	HT107332A0	Transistor, 2SA733 Q or R
Q708	1	1	1	HT107332A0	Transistor, 2SA733 Q or R
Q709	1	1	1	HT108792B0	Transistor, 2SA879 Q or R
Q710	1	1	1	HT108792B0	Transistor, 2SA879 Q or R
Q711	1	1	1	HT108792B0	Transistor, 2SA879 Q or R
Q712	1	1	1	HT108792B0	Transistor, 2SA879 Q or R
Q713	1	1	1	HT109392B0	Transistor, 2SA939 B or V
Q714	1	1	1	HT109392B0	Transistor, 2SA939 B or V
Q715	1	1	1	HT320712B0	Transistor, 2SC2071 B or V
Q716	1	1	1	HT320712B0	Transistor, 2SC2071 B or V
Q717	1	1	1	HT315682B0	Transistor, 2SC1568 R or S

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
Q718	1	1	1	HT315682B0	Transistor, 2SC1568 R or S
Q719	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q720	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q721	1	1	1	HT107332A0	Transistor, 2SA733 P or Q
Q722	1	1	1	HT107332A0	Transistor, 2SA733 P or Q
Q723	1	1	1	HT406102B0	Transistor, 2SD610 R or Q
Q724	1	1	1	HT406102B0	Transistor, 2SD610 R or Q
Q725	1	1	1	HT206302B0	Transistor, 2SB630 R or Q
Q726	1	1	1	HT206302B0	Transistor, 2SB630 R or Q
Q727	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q728	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q729	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q730	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q731	1	1	1	HT108792B0	Transistor, 2SA879 Q or R
Q732	1	1	1	HT108792B0	Transistor, 2SA879 Q or R
Q733	1	1	1	HT108792B0	Transistor, 2SA879 Q or R
Q734	1	1	1	HT108792B0	Transistor, 2SA879 Q or R
Q735	1	1	1	HT315732B0	Transistor, 2SC1573 Q or R
Q736	1	1	1	HT315732B0	Transistor, 2SC1573 Q or R
Q737	1	1	1	HD20003210	Diode, 1S2471
Q738	1	1	1	HD20003210	Diode, 1S2471
Q739	1	1	1	HD20003210	Diode, 1S2471
Q740	1	1	1	HD20003210	Diode, 1S2471
Q741	1	1	1	HD30023090	Diode, WZ071
Q742	1	1	1	HD30023090	Diode, WZ071
Q743	1	1	1	HD30002130	Diode, EQA01-35R
Q744	1	1	1	HD30002130	Diode, EQA01-35R
Q745	1	1	1	HD20003210	Diode, 1S2471
Q746	1	1	1	HD20003210	Diode, 1S2471
Q747	1	1	1	HD20003210	Diode, 1S2471
Q748	1	1	1	HD20003210	Diode, 1S2471
Q749	1	1	1	HD20003210	Diode, 1S2471
Q750	1	1	1	HD20003210	Diode, 1S2471
Q751	1	1	1	HD20003210	Diode, 1S2471
Q752	1	1	1	HD20003210	Diode, 1S2471
Q753	1	1	1	HD20003210	Diode, 1S2471
Q754	1	1	1	HD20003210	Diode, 1S2471
Q755	1	1	1	HD20003210	Diode, 1S2471
Q756	1	1	1	HD20003210	Diode, 1S2471
Q757	1	1	1	HD20003210	Diode, 1S2471
Q758	1	1	1	HD20003210	Diode, 1S2471
Q759	1	1	1	HD20003210	Diode, 1S2471
Q760	1	1	1	HD20003210	Diode, 1S2471
Q761	1	1	1	HD20003210	Diode, 1S2471
Q762	1	1	1	HD20003210	Diode, 1S2471
Q763	1	1	1	HD20003210	Diode, 1S2471
Q764	1	1	1	HD20003210	Diode, 1S2471
Q765	1	1	1	HD20011010	Diode, W06C
Q766	1	1	1	HD20011010	Diode, W06C
Q767	1	1	1	HD20011010	Diode, W06C
Q768	1	1	1	HD20011010	Diode, W06C
Q769	1	1	1	HD30023090	Diode, WZ071
Q770	1	1	1	HD30023090	Diode, WZ071
Q771	1	1	1	HD20002210	Diode, 1S2472
Q772	1	1	1	HD20002210	Diode, 1S2472
Q773	1	1	1	HD20002210	Diode, 1S2472
Q774	1	1	1	HD20002210	Diode, 1S2472
Q775	1	1	1	HD20010010	Diode, W06C
Q776	1	1	1	HD20010010	Diode, W06C
Q777	1	1	1	HD20010010	Diode, W06C
Q778	1	1	1	HD20010010	Diode, W06C
Q779	1	1	1	HD20010010	Diode, W06C
Q780	1	1	1	HD20010010	Diode, W06C

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
Q781	1	1	1	HV00003120	Varistor, MV-13
Q782	1	1	1	HV00003120	Varistor, MV-13
					P700 - MISCELLANEOUS
L701	1	1	1	LC22220010	Choke Coil, 2.2μH
L702	1	1	1	LC22220010	Choke Coil, 2.2μH
P708	116	116	116	2933118020	Spacer
P711	28	28	28	75061251P0	Jumper Wire
J709 ~ J714	6	6	6	YP06001040	Plug, 3P
J719 ~ J734	16	16	16	YP10001130	Plug
J737	1	1	1	YP06001040	Plug, 3P
J738	1	1	1	YP06001040	Plug, 3P
J739 ~ J742	4	4	4	YP10001130	Plug
					POWER SUPPLY CIRCUIT BOARD - P850
P850	1	1	1	YD22182040	P.W. Board (Print Only)
	1	1		ZZ22182040	P.W. Board Assembly
			1	ZZ22188040	P.W. Board Assembly
					P850 - RESISTORS
R851	1	1	1	GF05102140	Fixed, 1kΩ ±5%, ¼W
R852	1	1	1	GF05301140	Fixed, 300Ω ±5%, ¼W
R853	1	1	1	RT05102140	Fixed, 1kΩ ±5%, ¼W
R854	1	1	1	RT05301140	Fixed, 300Ω ±5%, ¼W
R855	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W
R856	1	1	1	RT05822140	Fixed, 8.2kΩ ±5%, ¼W
R857	1	1	1	RT05752140	Fixed, 7.5kΩ ±5%, ¼W
R858	1	1	1	RT05303140	Fixed, 30kΩ ±5%, ¼W
R859	1	1	1	RT05392140	Fixed, 3.9kΩ ±5%, ¼W
R860	1	1	1	RT05333140	Fixed, 33kΩ ±5%, ¼W
R861	1	1	1	GJ05241020	Fixed, 240Ω ±5%, 2W
R862	1	1	1	GJ05561010	Fixed, 560Ω ±5%, 1W
R863	1	1	1	GS10820050	Fixed, 82Ω ±10%, 5W
R864	1	1	1	GJ05301010	Fixed, 300Ω ±5%, 1W
R865	1	1	1	RT05682140	Fixed, 6.8kΩ ±5%, ¼W
R866	1	1	1	RT05752140	Fixed, 7.5kΩ ±5%, ¼W
R868	1	1	1	GJ05470020	Fixed, 47Ω ±5%, 2W
R869	1	1	1	GJ05470020	Fixed, 47Ω ±5%, 2W
R870	1	1	1	GF05390140	Fixed, 39Ω ±5%, ¼W
					P850 - CAPACITORS
C851	1	1	1	DK18103510	Ceramic, 0.01μF ±20%, 200V
C852	1	1	1	DK18103510	Ceramic, 0.01μF ±20%, 200V
C853	1	1	1	EA47701090	Electrolytic, 470μF +100%, -20%, 10V
C854	1	1	1	ED10805010	Electrolytic, 1000μF +100%, -20%, 50V
C855	1	1	1	ED47705020	Electrolytic, 470μF +100%, -20%, 50V
C856	1	1	1	EA10701690	Electrolytic, 100μF +100%, -10%, 16V
C857	1	1	1	EA10701690	Electrolytic, 100μF +100%, -10%, 16V
C858	1	1	1	DK18103510	Ceramic, 0.01μF ±20%, 200V
C859	1	1	1	DK18103510	Ceramic, 0.01μF ±20%, 200V
C860	1	1	1	EA33502590	Electrolytic, 3.3μF +100%, -10%, 25V

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
C861	1	1	1	EA33502590	Electrolytic, 3.3μF +100%, -10%, 25V
C862	1	1	1	EA22701690	Electrolytic, 220μF +100%, -10%, 16V
C863	1	1	1	DK18103510	Ceramic, 0.01μF ±20%, 200V
C864	1	1	1	DK18103510	Ceramic, 0.01μF ±20%, 200V
C865	1	1	1	EA33601690	Electrolytic, 33μF +100%, -20%, 16V
C867	1	1	1	DK18103510	Ceramic, 0.01μF ±20%, 200V
C868	1	1	1	DK18103510	Ceramic, 0.01μF ±20%, 200V
C869	1	1	1	EA22703590	Electrolytic, 220μF +100%, -20%, 35V
					P850 - SEMICONDUCTORS
Q851	1	1	1	HD20004130	Diode, SIB01-02
Q852	1	1	1	HD20012030	Diode, DS-132B
Q853	1	1	1	HD20011030	Diode, DS-131B
Q854	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q855	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q856	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q857	1	1	1	HT403302A0	Transistor, 2SD330 D or E
Q858	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
Q859	1	1	1	HT106842B0	Transistor, 2SA684 Q or R
Q860	1	1	1	HT107332A0	Transistor, 2SA733 Q or R
Q861	1	1	1	HT107332A0	Transistor, 2SA733 Q or R
Q862	1	1	1	HD30027090	Diode, WZ140
Q863	1	1	1	HD20002210	Diode, 1S2472
					P850 - MISCELLANEOUS
P857	22	22	22	3444118050	Spacer
F851	1	1		FS10050090	Fuse, 500mA (UL)
F851			1	FS10050800	Fuse, 500mA
F852	1	1		FS10050090	Fuse, 500mA (UL)
F852			1	FS10050800	Fuse, 500mA
F853	1	1		FS10200060	Fuse, 2A (UL)
F853			1	FS10200800	Fuse, 2A
J851 ~ J867 J868 ~ J873	17	17	17	YP10001130	Plug
	6	6	6	YJ08000210	Socket, Fuse
					PRE & TONE AMP CIRCUIT BOARD - PE00
PE00	1	1	1	YA22180210	P.W. Board (Print Only)
	1	1	1	ZZ22180210	P.W. Board Assembly
					PE00 - RESISTORS
RE01	1	1	1	RT05224140	Fixed, 220kΩ±5%, ¼W
RE02	1	1	1	RT05224140	Fixed, 220kΩ±5%, ¼W
RE03	1	1	1	RT05105140	Fixed, 1MΩ ±5%, ¼W
RE04	1	1	1	RT05105140	Fixed, 1MΩ ±5%, ¼W
RE05	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
RE06	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
RE07	1	1	1	RT05154140	Fixed, 150kΩ±5%, ¼W
RE08	1	1	1	RT05154140	Fixed, 150kΩ±5%, ¼W
RE09	1	1	1	RT05203140	Fixed, 20kΩ ±5%, ¼W
RE10	1	1	1	RT05203140	Fixed, 20kΩ ±5%, ¼W
RE11	1	1	1	RT05224140	Fixed, 220kΩ±5%, ¼W
RE12	1	1	1	RT05224140	Fixed, 220kΩ±5%, ¼W
RE13	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W
RE14	1	1	1	RT05103140	Fixed, 10kΩ ±5%, ¼W

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
RE15	1	1	1	RT05105140	Fixed, 1MΩ ±5%, ¼W
RE16	1	1	1	RT05105140	Fixed, 1MΩ ±5%, ¼W
RE17	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
RE18	1	1	1	RT05104140	Fixed, 100kΩ±5%, ¼W
RE19	1	1	1	RT05224140	Fixed, 220kΩ±5%, ¼W
RE20	1	1	1	RT05224140	Fixed, 220kΩ±5%, ¼W
RE21	1	1	1	RT05113140	Fixed, 11kΩ ±5%, ¼W
RE22	1	1	1	RT05113140	Fixed, 11kΩ ±5%, ¼W
RE23	1	1	1	RT05113140	Fixed, 11kΩ ±5%, ¼W
RE24	1	1	1	RT05113140	Fixed, 11kΩ ±5%, ¼W
RE25	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
RE26	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
RE27	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
RE28	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
RE29	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
RE30	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
RE31	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
RE32	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
RE33	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
RE34	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
RE35	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
RE36	1	1	1	RT05183140	Fixed, 18kΩ ±5%, ¼W
RE39	1	1	1	RD01040070	Variable, 100kΩ (B), Bass
RE40	1	1	1	RD01040070	Variable, 100kΩ (B), Mid
RE41	1	1	1	RD01040070	Variable, 100kΩ (B), Treble
RE42	1	1	1	RG02030010	Variable, 20kΩ(B)/250kΩ (V), Volume
RE43	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
RE44	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
RE45	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
RE46	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
RE49	1	1	1	RT05564140	Fixed, 560kΩ±5%, ¼W
RE50	1	1	1	RT05564140	Fixed, 560kΩ±5%, ¼W
					PE00 - CAPACITORS
CE01	1	1	1	EE22503510	Electrolytic, 2.2μF ±20%, 35V
CE02	1	1	1	EE22503510	Electrolytic, 2.2μF ±20%, 35V
CE03	1	1	1	EE22601640	Electrolytic, 22μF ±20%, 16V
CE04	1	1	1	EE22601640	Electrolytic, 22μF ±20%, 16V
CE05	1	1	1	EA10601690	Electrolytic, 10μF +100%, -10%, 16V
CE06	1	1	1	EA10601690	Electrolytic, 10μF +100%, -10%, 16V
CE07	1	1	1	DD15500050	Ceramic, 50pF±5%, 50V
CE08	1	1	1	DD15500050	Ceramic, 50pF±5%, 50V
CE09	1	1	1	DD12100010	Ceramic, 10pF±1pF, 50V
CE10	1	1	1	DD12100010	Ceramic, 10pF±1pF, 50V
CE11	1	1	1	EE10505010	Electrolytic, 1μF ±20%, 50V
CE12	1	1	1	EE10505010	Electrolytic, 1μF ±20%, 50V
CE13	1	1	1	EE47502540	Electrolytic, 4.7μF±20%, 25V
CE14	1	1	1	EE47502540	Electrolytic, 4.7μF±20%, 25V
CE15	1	1	1	DD15500050	Ceramic, 50pF ±5%, 50V
CE16	1	1	1	DD15500050	Ceramic, 50pF ±5%, 50V
CE17	1	1	1	DD16200010	Ceramic, 20pF ±10%, 50V
CE18	1	1	1	DD16200010	Ceramic, 20pF ±10%, 50V
CE19	1	1	1	DF16123010	Film, 0.012μF±10%, 50V
CE20	1	1	1	DF16123010	Film, 0.012μF±10%, 50V
CE21	1	1	1	DF16123010	Film, 0.012μF±10%, 50V
CE22	1	1	1	DF16123010	Film, 0.012μF±10%, 50V
CE23	1	1	1	DF17224020	Film, 0.22μF ±20%, 50V
CE24	1	1	1	DF17224020	Film, 0.22μF ±20%, 50V
CE25	1	1	1	DF16682010	Film, 0.0068μF±10%, 50V
CE26	1	1	1	DF16682010	Film, 0.0068μF±10%, 50V
CE27	1	1	1	DD16501010	Ceramic, 500pF ±10%, 50V

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
CE28	1	1	1	DD16501010	Ceramic, 500pF ±10%, 50V
CE29	1	1	1	DF16222010	Film, 0.0022μF±10%, 50V
CE30	1	1	1	DF16222010	Film, 0.0022μF±10%, 50V
CE31	1	1	1	DF16332010	Film, 0.0033μF±10%, 50V
CE32	1	1	1	DF16332010	Film, 0.0033μF±10%, 50V
CE33	1	1	1	DD15201010	Ceramic, 200pF ±10%, 50V
CE34	1	1	1	DD15201010	Ceramic, 200pF ±10%, 50V
CE35	1	1	1	EA10701690	Electrolytic, 100μF +100%, -10%, 16V
CE36	1	1	1	EA10701690	Electrolytic, 100μF +100%, -10%, 16V
CE37	1	1	1	DD12100010	Ceramic, 10pF ±1pF, 50V
CE38	1	1	1	DD12100010	Ceramic, 10pF ±1pF, 50V
CE41	1	1	1	DK18103010	Ceramic, 0.01μF ±1pF, 50V
CE42	1	1	1	DK18103010	Ceramic, 0.01μF ±1pF, 50V
CE43	1	1	1	DF16392010	Film, 3900pF ±10%, 50V
CE44	1	1	1	DF16392010	Film, 3900pF ±10%, 50V
CE45	1	1	1	DF16392010	Film, 3900pF ±10%, 50V
CE46	1	1	1	DF16392010	Film, 3900pF ±10%, 50V
CE47	1	1	1	DD12030010	Ceramic, 3pF ±1pF, 50V
CE48	1	1	1	DD12030010	Ceramic, 3pF ±1pF, 50V
					PE00 - MISCELLANEOUS
SE01	1	1	1	SR04050130	Rotary Switch, Tone Mode
QE01	1	1	1	HC10022050	IC, TA7136P
QE02	1	1	1	HC10022050	IC, TA7136P
QE03	1	1	1	HC10022050	IC, TA7136P
QE04	1	1	1	HC10022050	IC, TA7136P
PE11	18	18	18	75061251P0	Jumper Wire
JE01	1	1	1	YP06001040	Plug, 3P
JE02	1	1	1	YP06001040	Plug, 3P
JE04	1	1	1	YP06001040	Plug, 3P
JE05	1	1	1	YJ06000490	Jack, 9P
JE06	1	1	1	YJ06000740	Jack, 3P
JE07	1	1	1	YJ06000740	Jack, 3P
					DOLBY NR SOCKET CIRCUIT BOARD - PK00
PK00	1	1		YA22180310	P.W. Board (Print Only)
	1	1		ZZ22180310	P.W. Board Assembly
					PK00 - MISCELLANEOUS
SK01	1	1		SC01020240	Switch, AH2524
SK02	1	1		SC01020240	Switch, AH2524
JK01	1	1		YP10001130	Plug
JK02	1	1		YP10001130	Plug
JK03	1	1		YP10001130	Plug
JK04	1	1		YP10001130	Plug
JK05	1	1		YP10001130	Plug
JK06	1	1		YP10001130	Plug
JK07	1	1		YP10001130	Plug
JK08	1	1		YP10001130	Plug
JK09	1	1		YJ07000120	Socket, 10P
					AUDIO MUTING CIRCUIT BOARD - PN00
PN00	1	1	1	YA22180510	P.W. Board (Print Only)
	1	1	1	ZZ22180510	P.W. Board Assembly

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
					PN00 - RESISTORS
RN01	1	1	1	RT05224140	Fixed, 220kΩ ±5%, ¼W
RN02	1	1	1	RT05101140	Fixed, 100Ω ±5%, ¼W
RN03	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
RN04	1	1	1	RT05223140	Fixed, 22kΩ ±5%, ¼W
RN05	1	1	1	GJ05122010	Fixed, 1.2kΩ ±5%, 1W
RN06	1	1	1	RT05473140	Fixed, 47kΩ ±5%, ¼W
					PN00 - MISCELLANEOUS
CN01	1	1	1	EA22700690	Capacitor, Electrolytic, 220μF +100%, -10%, 6.3V
LN01	1	1	1	LY20480020	Relay, MSJ2, 48V
QN01	1	1	1	HT406673A0	Transistor, 2SD667 B, C or D
PN08	2	2	2	2933118020	Spacer
JN01 ~ JN07	7	7	7	YP10001130	Plug
					SOFT START CIRCUIT BOARD - PQ00
PQ00	1	1	1	YA22180410	P.W. Board (Print Only)
	1	1	1	ZZ22180410	P.W. Board Assembly
					PQ00 - RESISTORS
RQ01	1	1	1	RT05332140	Fixed, 3.3kΩ ±5%, ¼W
RQ02	1	1	1	RT05753140	Fixed, 75kΩ ±5%, ¼W
RQ03	1	1	1	RT05822140	Fixed, 8.2kΩ ±5%, ¼W
RQ04	1	1	1	RT05104140	Fixed, 100kΩ ±5%, ¼W
RQ05	1	1	1	GJ05472010	Fixed, 4.7kΩ ±5%, 1W
RQ06	1	1	1	RT05472140	Fixed, 4.7kΩ ±5%, ¼W
RQ07	1	1	1	RT05154140	Fixed, 150kΩ ±5%, ¼W
RQ08	1	1	1	RT05562140	Fixed, 5.6kΩ ±5%, ¼W
RQ09	1	1	1	GJ05821020	Fixed, 820Ω ±5%, 2W
RQ10	1	1	1	RT05273140	Fixed, 27kΩ ±5%, ¼W
					PQ00 - CAPACITORS
CQ01	1	1	1	EA10701690	Electrolytic, 100μF +100%, -10%, 16V
CQ02	1	1	1	EA10701090	Electrolytic, 100μF +100%, -10%, 10V
CQ03	1	1	1	EA10610010	Electrolytic, 10μF +100%, -10%, 100V
CQ04	1	1	1	EA22601090	Electrolytic, 22μF +100%, -10%, 10V
					PQ00 - MISCELLANEOUS
QQ01	1	1	1	HT107332A0	Transistor, 2SA733 Q or R
QQ02	1	1	1	HT107332A0	Transistor, 2SA733 Q or R
QQ03	1	1	1	HT206312B0	Transistor, 2SB631 E or F
QQ04	1	1	1	HT107332A0	Transistor, 2SA733 Q or R
QQ05	1	1	1	HV00003120	Varistor, MV-13
QQ06	1	1	1	HV00003120	Varistor, MV-13
QQ07	1	1	1	HD20002210	Diode, 1S2472
QQ08	1	1	1	HD30023090	Diode, WZ071
QQ09	1	1	1	HD20010010	Diode, W06B
QQ10	1	1	1	HD20002210	Diode, 1S2472
JQ01	1	1	1	YP06001060	Plug, 7P
PQ11	4	4	4	3441118050	Spacer

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
					TAPE MONITOR, TAPE COPY, MULTIPATH & MPX NOISE FILTER SWITCHES CIRCUIT BOARD - PS00
PS00	1	1	1	YA22180230	P.W. Board (Print Only)
	1	1	1	ZZ22180230	P.W. Board Assembly
					PS00 - RESISTORS
RS01	1	1	1	GD05102140	Fixed, 1kΩ ±5%, ¼W
RS02	1	1	1	GD05102140	Fixed, 1kΩ ±5%, ¼W
RS03	1	1	1	GD05223140	Fixed, 22kΩ ±5%, ¼W
RS04	1	1	1	GD05223140	Fixed, 22kΩ ±5%, ¼W
RS05	1	1	1	GD05152140	Fixed, 1.5kΩ ±5%, ¼W
RS06	1	1	1	GD05822140	Fixed, 8.2kΩ ±5%, ¼W
RS07	1	1	1	GD05105140	Fixed, 1MΩ ±5%, ¼W
RS08	1	1	1	GD05914140	Fixed, 910kΩ ±5%, ¼W
RS09	1	1	1	GD05222140	Fixed, 2.2kΩ ±5%, ¼W
					PS00 - CAPACITORS
CS01	1	1	1	DF15183050	Film, 0.018μF±5%, 50V
CS02	1	1	1	EA47503590	Electrolytic, 4.7μF +100%, -10%, 35V
CS03	1	1	1	EA47503590	Electrolytic, 4.7μF +100%, -10%, 35V
CS04	1	1	1	EA47503590	Electrolytic, 4.7μF +100%, -10%, 35V
					PS00 - SEMICONDUCTORS
QS01	1	1	1	HT309452A0	Transistor, 2SC945 Q or R
QS02	1	1	1	HT108422A0	Transistor, 2SA842
QS03	1	1	1	HD10003020	Diode, 20A90
QS05	1	1	1	HD10003020	Diode, 20A90
QS06	1	1	1	HD10003020	Diode, 20A90
					PS00 - MISCELLANEOUS
JS01	1	1	1	YP06001080	Plug, 7P
JS02	1	1	1	YP06001080	Plug, 7P
JS03	1	1	1	YP06000650	Plug, 4P
JS04	1	1	1	YP06000340	Plug, 3P
JS05	1	1	1	YP06000360	Plug, 5P
JS06	1	1	1	YP06001090	Plug, 3P
PS11	22	22	22	75061001P0	Jumper Wire
SS01	1	1	1	SP06060080	Pushswitch
					FILTER AMP CIRCUIT BOARD - PT00
PT00	1	1	1	YA22180240	P.W. Board (Print Only)
	1	1	1	ZZ22180240	P.W. Board Assembly
					PT00 - RESISTORS
RT01	1	1	1	GD05274140	Fixed, 270kΩ ±5%, ¼W
RT02	1	1	1	GD05274140	Fixed, 270kΩ ±5%, ¼W
RT03	1	1	1	GD05333140	Fixed, 33kΩ ±5%, ¼W
RT04	1	1	1	GD05333140	Fixed, 33kΩ ±5%, ¼W
RT05	1	1	1	GD05224140	Fixed, 220kΩ ±5%, ¼W
RT06	1	1	1	GD05224140	Fixed, 220kΩ ±5%, ¼W
RT07	1	1	1	GD05363140	Fixed, 36kΩ ±5%, ¼W
RT08	1	1	1	GD05363140	Fixed, 36kΩ ±5%, ¼W
RT09	1	1	1	GD05101140	Fixed, 100Ω ±5%, ¼W
RT10	1	1	1	GD05101140	Fixed, 100Ω ±5%, ¼W
RT11	1	1	1	GD05363140	Fixed, 36kΩ ±5%, ¼W
RT12	1	1	1	GD05363140	Fixed, 36kΩ ±5%, ¼W
RT13	1	1	1	GD05225140	Fixed, 2.2MΩ ±5%, ¼W
RT14	1	1	1	GD05225140	Fixed, 2.2MΩ ±5%, ¼W

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
RT15	1	1	1	GD05153140	Fixed, 15kΩ ±5%, ¼W
RT16	1	1	1	GD05153140	Fixed, 15kΩ ±5%, ¼W
RT17	1	1	1	GD05393140	Fixed, 39kΩ ±5%, ¼W
RT18	1	1	1	GD05393140	Fixed, 39kΩ ±5%, ¼W
RT19	1	1	1	GD05913140	Fixed, 91kΩ ±5%, ¼W
RT20	1	1	1	GD05913140	Fixed, 91kΩ ±5%, ¼W
RT21	1	1	1	GD05821140	Fixed, 820Ω ±5%, ¼W
RT22	1	1	1	GD05821140	Fixed, 820Ω ±5%, ¼W
RT23	1	1	1	GD05562140	Fixed, 5.6kΩ ±5%, ¼W
RT24	1	1	1	GD05562140	Fixed, 5.6kΩ ±5%, ¼W
RT25	1	1	1	GD05113140	Fixed, 11kΩ ±5%, ¼W
RT26	1	1	1	GD05113140	Fixed, 11kΩ ±5%, ¼W
RT27	1	1	1	GD05222140	Fixed, 2.2kΩ ±5%, ¼W
RT28	1	1	1	GD05222140	Fixed, 2.2kΩ ±5%, ¼W
RT29	1	1	1	GD05225140	Fixed, 2.2MΩ ±5%, ¼W
RT30	1	1	1	GD05225140	Fixed, 2.2MΩ ±5%, ¼W
					PT00 - CAPACITORS
CT01	1	1	1	DF16104010	Film, 0.1μF ±10%, 50V
CT02	1	1	1	DF16104010	Film, 0.1μF ±10%, 50V
CT03	1	1	1	DF15223010	Film, 0.022μF±5%, 50V
CT04	1	1	1	DF15223010	Film, 0.022μF±5%, 50V
CT05	1	1	1	DF15223010	Film, 0.022μF±5%, 50V
CT06	1	1	1	DF15223010	Film, 0.022μF±5%, 50V
CT07	1	1	1	EV33502560	Electrolytic, 3.3μF±20%, 25V
CT08	1	1	1	EV33502560	Electrolytic, 3.3μF±20%, 25V
CT09	1	1	1	DK16681010	Ceramic, 680pF ±10%, 50V
CT10	1	1	1	DK16681010	Ceramic, 680pF ±10%, 50V
CT11	1	1	1	DK16471010	Ceramic, 470pF ±10%, 50V
CT12	1	1	1	DK16471010	Ceramic, 470pF ±10%, 50V
CT13	1	1	1	DF17273050	Film, 0.027μF±10%, 50V
CT14	1	1	1	DF17273050	Film, 0.027μF±10%, 50V
CT15	1	1	1	DD15391010	Ceramic, 390pF ±10%, 50V
CT16	1	1	1	DD15391010	Ceramic, 390pF ±10%, 50V
CT17	1	1	1	DD11040010	Ceramic, 4pF ±0.5pF, 50V
CT18	1	1	1	DD11040010	Ceramic, 4pF ±0.5pF, 50V
CT19	1	1	1	EV22403560	Electrolytic, 0.22μF±10%, 35V
CT20	1	1	1	EV22403560	Electrolytic, 0.22μF±10%, 35V
CT21	1	1	1	DD15121010	Ceramic, 120pF ±5%, 35V
CT22	1	1	1	DD15121010	Ceramic, 120pF ±5%, 35V
CT23	1	1	1	EA47601690	Electrolytic, 47μF +100%, -10%, 16V
CT24	1	1	1	EA47601690	Electrolytic, 47μF +100%, -10%, 16V
					PT00 - MISCELLANEOUS
QT01	1	1	1	HT107332A0	Transistor, 2SA733 Q or R
QT02	1	1	1	HT107332A0	Transistor, 2SA733 Q or R
QT03	1	1	1	HT313272B0	Transistor, 2SC1327 T or U
QT04	1	1	1	HT313272B0	Transistor, 2SC1327 T or U
JT01	1	1	1	YP06000340	Plug, 3P
JT02	1	1	1	YP06000340	Plug, 3P
JT03	1	1	1	YP06000700	Plug, 9P
JT04	1	1	1	YP10001130	Plug
PT11	14	14	14	75061001P0	Jumper Wire
ST01	1	1	1	SP02040040	Pushswitch
					DUBBING IN & OUT JACKS CIRCUIT BOARD - PV00
PV00	1	1	1	YD22180010	P.W. Board (Print Only)
	1	1	1	ZZ22180010	P.W. Board Assembly

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
					PV00 - MISCELLANEOUS
JV01	1	1	1	YP06000570	Plug, 3P
JV02	1	1	1	YJ06000760	Socket, 5P
JV03	1	1	1	YJ01001040	Jack
JV04	1	1	1	YJ01001050	Jack
					SPEAKER SYSTEM SWITCH & ATTENUATOR CIRCUIT BOARD - PW00
PW00	1	1	1	YD22180050	P.W. Board (Print Only)
	1	1	1	ZZ22180050	P.W. Board Assembly
					PW00 - RESISTORS
RW01	1	1	1	GS10331070	Fixed, 330Ω ±10%, 7W
RW02	1	1	1	GS10331070	Fixed, 330Ω ±10%, 7W
RW03	1	1	1	RJ05151020	Fixed, 150Ω ±5%, 2W
RW04	1	1	1	RJ05151020	Fixed, 150Ω ±5%, 2W
					PW00 - MISCELLANEOUS
SW01	1	1	1	SP04020180	Pushswitch, Speaker
JW01	1	1	1	YP10001130	Plug
JW02	1	1	1	YP10001130	Plug
JW03	1	1	1	YP10001130	Plug
JW04	1	1	1	YP10001130	Plug
JW05	1	1	1	YP10001130	Plug
					PEAK & FUNCTION INDICATOR LED CIRCUIT BOARD - PY00
PY00	1	1	1	YD22180030	P.W. Board (Print Only)
	1	1		ZZ22180030	P.W. Board Assembly
			1	ZZ22188030	P.W. Board Assembly
					PY00 - MISCELLANEOUS
QY01	1	1	1	HI10004030	Led, SLP-132B
QY02	1	1	1	HI10004030	Led, SLP-132B
QY03			1	HI10004030	Led, SLP-132B
QY04	1	1	1	HI10004030	Led, SLP-132B
QY05	1	1	1	HI10004030	Led, SLP-132B
QY06	1	1	1	HI10004030	Led, SLP-132B
QY07	1	1	1	HI10004030	Led, SLP-132B
QY08	1	1	1	HI10004030	Led, SLP-132B
QY09	1	1	1	HI10004030	Led, SLP-132B
RY01	1	1	1	RT05152140	Resistor, Fixed, 1.5kΩ±5%, ¼W
RY02	1	1	1	RT05152140	Resistor, Fixed, 1.5kΩ±5%, ¼W
PY11	1	1	1	75061251P0	Jumper Wire
JY01	1	1	1	YP10001130	Plug
JY03	1	1	1	YP10001130	Plug
JY04	1	1	1	YP10001130	Plug
JY05	1	1	1	YP10001130	Plug
JY08	1	1	1	YP10001130	Plug
JY10			1	YP10001130	Plug
JY15	1	1	1	YP10001130	Plug
JY16	1	1	1	YP10001130	Plug
JY17	1	1	1	YP10001130	Plug
JY18	1	1	1	YP10001130	Plug
JY19	1	1	1	YP10001130	Plug
JY20	1	1	1	YP10001130	Plug
JY23	1	1	1	YP10001130	Plug

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
					DIAL LAMP CIRCUIT BOARD - PZ00
PZ00	1	1	1	YD22180040	P.W. Board (Print Only)
	1	1		ZZ22180040	P.W. Board Assembly
			1	ZZ22188140	P.W. Board Assembly
					PZ01 - MISCELLANEOUS
VZ01	1	1	1	IN10080070	Lamp, Dial
VZ02	1	1	1	IN10080070	Lamp, Dial
VZ03	1	1	1	IN10080070	Lamp, Dial
VZ04	1	1	1	IN10080070	Lamp, Dial
VZ05	1	1	1	IN10080070	Lamp, Dial
VZ06	1	1	1	IN10080070	Lamp, Dial
JZ21	1	1	1	YP10001130	Plug
JZ01	1	1	1	YP10001130	Plug
JZ02	1	1	1	YP10001130	Plug
JZ03	1	1	1	YP10001130	Plug
JZ04	1	1	1	YP10001130	Plug
JZ05	1	1	1	YJ08000170	Socket
JZ06	1	1	1	YJ08000170	Socket
JZ07	1	1	1	YJ08000170	Socket
JZ08	1	1	1	YJ08000170	Socket
JZ09	1	1	1	YJ08000170	Socket
JZ10	1	1	1	YJ08000170	Socket
JZ11	1	1	1	YJ08000170	Socket
JZ12	1	1	1	YJ08000170	Socket
JZ13	1	1	1	YJ08000170	Socket
JZ14	1	1	1	YJ08000170	Socket
JZ15	1	1	1	YJ08000170	Socket
JZ16	1	1	1	YJ08000170	Socket
JZ17	1	1	1	YP10001130	Plug
JZ18	1	1		YP10001130	Plug
JZ19	1	1		YP10001130	Plug
JZ20	1	1	1	YP10001130	Plug
					GENERAL MISCELLANEOUS
J001	1	1	1	BY04050010	Terminal, Antenna
J002	1	1	1	YT02010130	Terminal, FM Quadradial Output
J003	1	1	1	YT02040190	Terminal, Phono
J004	1	1		YT02020140	Terminal, Aux
J004			1	YT02040140	Terminal, Aux
J005	1	1	1	YT02040140	Terminal, Tape 1
J006	1	1	1	YT02040140	Terminal, Tape 2
J007	1	1	1	YT02040170	Terminal, Pre Out/Main In
J008	1	1	1	YT03040160	Terminal, Speaker System 1
J009	1	1	1	YT03040160	Terminal, Speaker System 2
J010	1	1	1	YJ01001060	Jack, Phones
J011	1	1	1	YJ04000560	Jack, AC Outlet
J012	1	1	1	YJ04000560	Jack, AC Outlet
J013	1	1		YJ08000120	Jack, Fuse Holder
J013			1	YJ08000220	Jack, Fuse Holder
J014	1	1	1	YT01010050	Terminal, Chassis Ground
J015	1	1	1	YJ08000190	Jack, Lamp Socket
J016	1	1	1	YJ08000190	Jack, Lamp Socket
J017	1	1	1	YJ06001040	Jack, 3P Socket
J018	1	1	1	YJ06001040	Jack, 3P Socket
J019	1	1		YJ06001040	Jack, 3P Socket
J020	1	1	1	YJ06001040	Jack, 3P Socket
J021	1	1	1	YJ06001040	Jack, 3P Socket
J022	1	1	1	YJ06001040	Jack, 3P Socket
J023	1	1	1	YJ06001040	Jack, 3P Socket

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
J024	1	1	1	YJ06001040	Jack, 3P Socket
J025	1	1	1	YJ06001040	Jack, 3P Socket
J026	1	1	1	YJ06001040	Jack, 3P Socket
J027	1	1	1	YJ06001040	Jack, 3P Socket
J028	1	1	1	YJ06001040	Jack, 3P Socket
J029	1	1	1	YJ06001040	Jack, 3P Socket
J030	1	1	1	YJ06001040	Jack, 3P Socket
J031	1	1	1	YJ06001260	Jack, 7P Socket
J032	1	1	1	YJ06001040	Jack, 3P Socket
J033	1	1	1	YJ06001060	Jack, 7P Socket
J036	1	1	1	YJ06001040	Jack, 3P Socket
J037	1	1	1	YJ06001040	Jack, 3P Socket
J038	1	1	1	YJ06001040	Jack, 3P Socket
J039			1	BY03110010	Terminal, Voltage Conversion
J040	1	1	1	YJ06001270	Jack, 6P Socket
J041	1	1	1	YJ06001270	Jack, 6P Socket
J042	1	1	1	YJ06001040	Jack, 3P Socket
J043	1	1	1	YJ06001040	Jack, 3P Socket
J044	1	1	1	YJ06001040	Jack, 3P Socket
J045	1	1	1	YJ06001040	Jack, 3P Socket
J046	1	1	1	YJ05000220	Jack, Transistor Socket
J047	1	1	1	YJ05000220	Jack, Transistor Socket
J048	1	1	1	YJ05000220	Jack, Transistor Socket
J049	1	1	1	YJ05000220	Jack, Transistor Socket
J050	1	1	1	YJ05000220	Jack, Transistor Socket
J051	1	1	1	YJ05000220	Jack, Transistor Socket
J052	1	1	1	YJ05000220	Jack, Transistor Socket
J053	1	1	1	YJ05000220	Jack, Transistor Socket
J054	1	1	1	YJ05000220	Jack, Transistor Socket
J055	1	1	1	YJ05000220	Jack, Transistor Socket
J056	1	1	1	YJ05000220	Jack, Transistor Socket
J057	1	1	1	YJ05000220	Jack, Transistor Socket
J058	1	1	1	YJ10000850	Jack, Relay Connector
J059	1	1	1	YJ06001040	Jack, 3P Socket
J060	1	1	1	YJ06001040	Jack, 3P Socket
J061	1	1	1	YL01020080	Terminal, 2P
J062	1	1	1	YJ06001040	Jack, 3P Socket
J063	1	1	1	YJ06001040	Jack, 3P Socket
J064	1	1	1	YJ06001060	Jack, 7P Socket
J065	1	1	1	YJ06001040	Jack, 3P Socket
L001	1	1		TS44501010	Power Transformer
L001			1	TS44501020	Power Transformer
L002	1	1	1	LF11200520	Antenna Coil, AM
L003	1	1	1	LB30075260	Balun Coil
L004	1	1	1	LC11540020	Choke Coil
L005	1		1	LY20480030	Relay, Soft Start
L005		1		LY20480040	Relay, Soft Start
R001	1	1	1	RK02030322	Resistor, Variable, 20kΩ (B), FM Muting
R002	1	1		RC10225120	Resistor, Fixed, 2.2MΩ ±10%, ½W
R003	1	1	1	GS10220100	Resistor, Fixed, 22Ω ±10%, 10W
R004	1	1	1	RT05432140	Resistor, Fixed, 4.3kΩ ±5%, ¼W
R005	1	1	1	RS02540110	Resistor, Variable, 250kΩ, Balance
R006	1	1	1	GS05472020	Resistor, Fixed, 4.7kΩ±5%, 2W
R007	1	1	1	GS05472020	Resistor, Fixed, 4.7kΩ±5%, 2W
C001	1	1	1	DK18103010	Capacitor, Ceramic, 0.01μF ±20%, 50V

U : For U.S.A.
C : For Canada
E : For Europe

REF. DESIG.	Q'TY U	C	E	PART NO.	DESCRIPTION
C002	1	1	1	DK18103010	Capacitor, Ceramic, 0.01μF ±20%, 50V
C003	1	1	1	EA33601090	Capacitor, Electrolytic, 33μF +100%, -10%, 10V
C004	1	1	1	EA33601090	Capacitor, Electrolytic, 33μF +100%, -10%, 10V
C005	1	1	1	DF17223520	Capacitor, Film, 0.022μF, 400V
C006	1	1	1	DF17223520	Capacitor, Film, 0.022μF, 400V
C007	1	1	1	DF17223520	Capacitor, Film, 0.022μF, 400V
C008	1	1	1	DF17223520	Capacitor, Film, 0.022μF, 400V
C009	1	1	1	DF17223520	Capacitor, Film, 0.022μF, 400V
C010	1	1	1	DF17223520	Capacitor, Film, 0.022μF, 400V
C011	1	1	1	ES68808510	Capacitor, Electrolytic, 6800μF, 85Vx2
C012	1	1	1	ES68808510	Capacitor, Electrolytic, 6800μF, 85Vx2
C013			1	DF17333510	Capacitor, Film, 0.033μF ±20%, 250V
M001	1	1	1	IM11055050	DC Meter, FM Tuning
M002	1	1	1	IM11055040	DC Meter, Signal Strength
V001	1	1	1	IN10080070	Lamp, Meter, 8V
V002	1	1	1	IN10080070	Lamp, Meter, 8V
V003	1	1		IN10080090	Lamp, Dolby
V004	1	1	1	IN10080340	Lamp, Stereo - 8.V
F001	1			FS11000050	Fuse, 10A (UL)
F001		1		FS11000040	Fuse, 10A
F001			1	FS10500800	Fuse, 5A
F002		1		FS21000010	Fuse, 10A
G001	1			BF10400030	Printed Comp. (UL)
G001		1		BF33300020	Printed Comp. (CSA)
S001	1	1	1	SP04010230	Pushswitch, Power
Q001	1	1	1	HD20004290	Diode, S5VB20
Q002	1	1	1	HD20004290	Diode, S5VB20
Q003	1	1	1	HT315852B0	Transistor, 2SC1585 O or Y
Q004	1	1	1	HT315852B0	Transistor, 2SC1585 O or Y
Q005	1	1	1	HT315852B0	Transistor, 2SC1585 O or Y
Q006	1	1	1	HT315852B0	Transistor, 2SC1585 O or Y
Q007	1	1	1	HT315852B0	Transistor, 2SC1585 O or Y
Q008	1	1	1	HT315852B0	Transistor, 2SC1585 O or Y
Q009	1	1	1	HT109082B0	Transistor, 2SA908 O or Y
Q010	1	1	1	HT109082B0	Transistor, 2SA908 O or Y
Q011	1	1	1	HT109082B0	Transistor, 2SA908 O or Y
Q012	1	1	1	HT109082B0	Transistor, 2SA908 O or Y
Q013	1	1	1	HT109082B0	Transistor, 2SA908 O or Y
Q014	1	1	1	HT109082B0	Transistor, 2SA908 O or Y
Q015	1	1	1	HV00005080	Varistor, STV-3HY
Q016	1	1	1	HV00005080	Varistor, STV-3HY
W001	1	1		YC02400250	AC Cord
W001			1	YC01900030	AC Cord
7906	1	1	1	2218103500	Pointer K

12. TECHNICAL SPECIFICATIONS

[FOR U.S.A. MODEL ONLY]

AMPLIFIER SECTION:

RATED POWER OUTPUT, MINIMUM CONTINUOUS AVERAGE POWER PER CHANNEL, BOTH CHANNELS DRIVEN . . . . . 185 W
POWER BAND . . . . . 20 Hz to 20 kHz
TOTAL HARMONIC DISTORTION 0.05%
LOAD IMPEDANCE . . . . . 8 ohms
RATED POWER OUTPUT, MINIMUM CONTINUOUS AVERAGE POWER PER CHANNEL, BOTH CHANNELS DRIVEN . . . . . 240 W
POWER BAND . . . . . 20 Hz to 20 kHz
TOTAL HARMONIC DISTORTION 0.1%
LOAD IMPEDANCE . . . . . 4 ohms

I.M. Distortion
(I.H.F. method, 60 Hz and 7 kHz mixed 4:1 at rated power output)
at 8 ohm load impedance 0.05%
at 4 ohm load impedance 0.1%
Damping Factor (at 20 Hz) 60
Sensitivity (at MAIN IN) . . . . . 1.5 V
Impedance (at MAIN IN) . . . . . 40 kohms
Frequency Response for Power Amp Only
(at 1 Watt output, 20 Hz to 20 kHz) . . . . . ±0.2 dB

PREAMPLIFIER SECTION:

Phono
Input Overload at 1 kHz . . . . . 200 mV
Equivalent Input Noise . . . . . 1.0 μV
Dynamic Range
(Dynamic Range is the ratio of input overload to equivalent input noise) . . . . . 106 dB
Input Sensitivity . . . . . 1.8 mV
Input Impedance . . . . . 47 kohms
Frequency Response, RIAA 20 Hz to 20 kHz . . . . . ±0.25 dB
Signal-to-Noise Ratio
(at rated output and 7.75 mV input) . . . . . 79 dB
High Level (Aux and Tape)
Input Sensitivity . . . . . 180 mV
Input Impedance . . . . . 47 kohms
Frequency Response
(includes power amp) . . . . . 10 Hz to 50 kHz, ±1.0 dB
Signal-to-Noise Ratio
(ref. to rated output and 775 mV input) . . . . . 92 dB
Output Levels
Tape Out (ref. 7.75 mV at Phono inputs) . . . . . 775 mV
Pre-Out (ref. 180 mV at Aux inputs) . . . . . 1.5 V
(ref. 500 mV at Aux inputs, main amp disconnected) . . . . . 4.2 V
Output Impedance
Tape Out . . . . . 500 ohms
Pre-Out . . . . . 50 ohms

FM TUNER SECTION:

Sensitivity
IHF Usable . . . . . 8.75 dBf (1.5 μV)
IHF 50 dB Quieting (mono) . . . . . 12.1 dBf (2.2 μV)
(stereo) . . . . . 33.2 dBf (25 μV)
Quieting Slope (Mono)
RF Input for 30 dB Quieting . . . . . 6.8 dBf (1.2 μV)
Quieting at:
20 dBf (5.5 μV) . . . . . 58 dB
25 dBf (10 μV) . . . . . 66 dB
40 dBf (55 μV) . . . . . 78 dB
65 dBf (1000 μV) . . . . . 80 dB
Quieting Slope (Stereo)
Quieting at:
30 dBf (17 μV) . . . . . 49 dB
40 dBf (55 μV) . . . . . 62 dB
50 dBf (173 μV) . . . . . 70 dB
65 dBf (1000 μV) . . . . . 75 dB
Distortion (Mono) at 65 dBf (1000 μV)
100 Hz 0.15%
1000 Hz 0.1%
6000 Hz 0.15%
Distortion (Stereo) at 65 dBf (1000 μV)
100 Hz 0.35%
1000 Hz 0.2%
6000 Hz 0.3%
Distortion (Mono and Stereo)
at 50 dB Quieting, 1000 Hz 0.4%
Hum and Noise
at 65 dBf (1000 μV)
Mono . . . . . −80 dB
Frequency Response
30 Hz to 15 kHz
Mono . . . . . +0.2, −1.0 dB
Stereo . . . . . +0.2, −1.0 dB
Capture Ratio
at 45 dBf (100 μV) . . . . . 1.0 dB
at 65 dBf (1000 μV) . . . . . 1.0 dB
Alternate Channel Selectivity . . . . . 85 dB
Spurious Response Rejection . . . . . 120 dB
Image Response Rejection . . . . . 120 dB
I.F. Rejection (Balanced) . . . . . 120 dB
A.M. Suppression . . . . . 60 dB
Stereo Separation
100 Hz . . . . . 45 dB
1000 Hz . . . . . 50 dB
10 kHz . . . . . 42 dB
Subcarrier Rejection . . . . . 75 dB

AM TUNER SECTION:

IHF Usable Sensitivity . . . . . 10 μV
Distortion (THD), 30% Modulation 0.4%
Signal-to-Noise Ratio . . . . . 55 dB
Alternate Channel Selectivity . . . . . 50 dB
Image Rejection . . . . . 80 dB
Spurious Response Rejection . . . . . 90 dB
I.F. Rejection . . . . . 80 dB

GENERAL:

Power Requirements . . . . . 120 V AC, 60 Hz
Power Consumption at rated output, both channels operating . . . . . 670 W
Idling Power (Volume Control at zero) . . . . . 75 W
Dimensions:
Panel Width . . . . . 490 mm (19-1/4")
Panel Height . . . . . 177 mm (7")
Depth . . . . . 438 mm (17-1/4")
Weight:
Unit alone . . . . . 26 kg (57.2 lbs)
Packed for shipment . . . . . 28 kg (61.6 lbs)

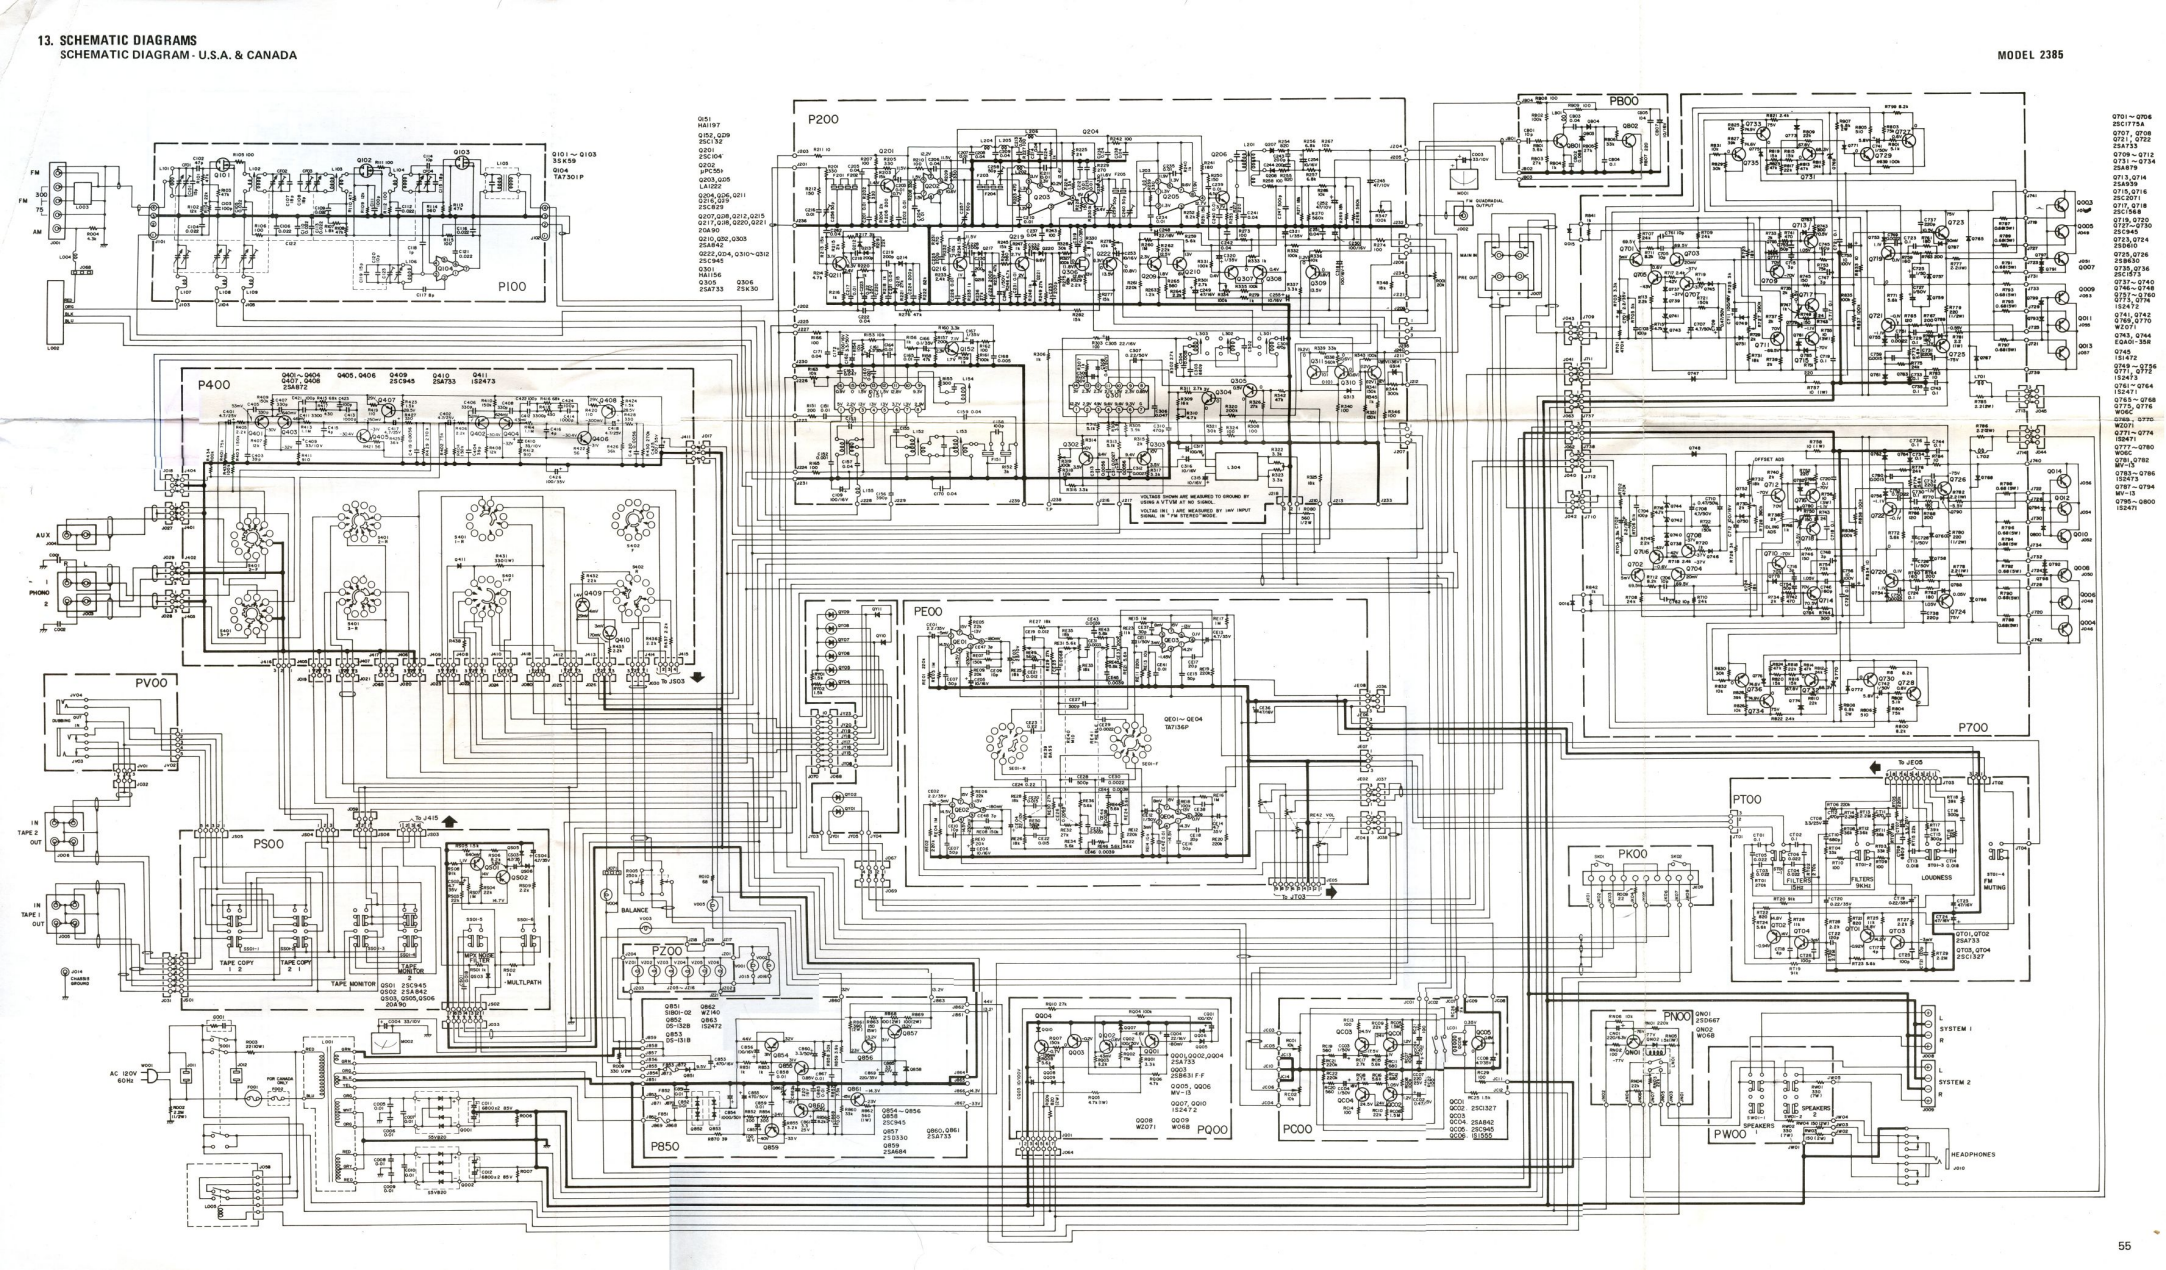
P100
P200
P400
PB00
P700
PE00
PV00
PS00
PZ00
P850
PT00
PK00
PQ00
PC00
PW00
PN00
Q101 ~ Q103
2SK59
Q104
TA7301P
Q151
2SC1734
Q201
2SC104
Q202
μPC55
Q203,Q205
LA1222
Q204,Q206,Q211
Q216,Q219
2SC829
Q207,Q208,Q212,Q215
Q217,Q218,Q220,Q221
2SA90
Q210,Q250,Q303
2SA854
Q222,Q224,Q310~Q312
2SC945
Q301
2SC1815
Q305
2SA733
Q306
2SK30
Q401~Q404
Q407,Q408
2SA872
Q405,Q406
Q409
2SC945
Q410
2SA733
Q411
IS2473
QE01~QE04
TA7136P
Q851
Q852
Q853
Q854~Q856
2SC945
Q857
2SD330
Q859
2SA684
Q860,Q861
2SA733
Q001,Q002,Q004
2SA733
Q003
2SB631 F-F
Q005,Q006
MV-13
Q007,Q010
IS2472
Q008
WZ071
Q009
MO6B
QC01
QC02
2SC1327
QC03
QC04
2SA842
QC05
2SC945
QC06
IS1555
Q701~Q706
2SC1734
Q707,Q708
Q721,Q722
2SA733
Q709~Q712
Q723,Q724
2SA879
Q713,Q714
2SA939
Q715,Q716
2SC2071
Q717,Q718
2SC1568
Q719,Q720
Q727~Q730
2SC945
Q725,Q726
2SB630
Q735,Q736
2SC1573
Q737~Q740
Q746~Q748
Q751~Q760
Q775,Q776
IS2472
Q741,Q742
Q765,Q770
WZ071
Q763,Q764
EQA01-38
Q745
IS1472
Q749~Q726
Q771,Q772
IS2413
Q761~Q764
IS2471
Q765~Q768
Q773,Q776
WO6B
Q766,Q770
WZ071
Q771~Q774
IS2471
Q777~Q780
WO6C
Q781,Q782
MV-13
Q783~Q786
IS2473
Q787~Q794
MV-13
Q795~Q800
IS2471
QT01,QT02
2SA733
QT03,QT04
2SC1327
FM
300
75
AM
AUX
PHONO
IN
TAPE 2
OUT
IN
TAPE 1
OUT
AC 120V
60Hz
SYSTEM 1
SYSTEM 2
SPEAKERS
HEADPHONES
TAPE COPY
TAPE MONITOR
MPX MODE
FILTER
MULTIPATH
BALANCE
LOUDNESS
FM MUTING
FILTERS
9KHz
To J503
To J415
To JE05
To JT03

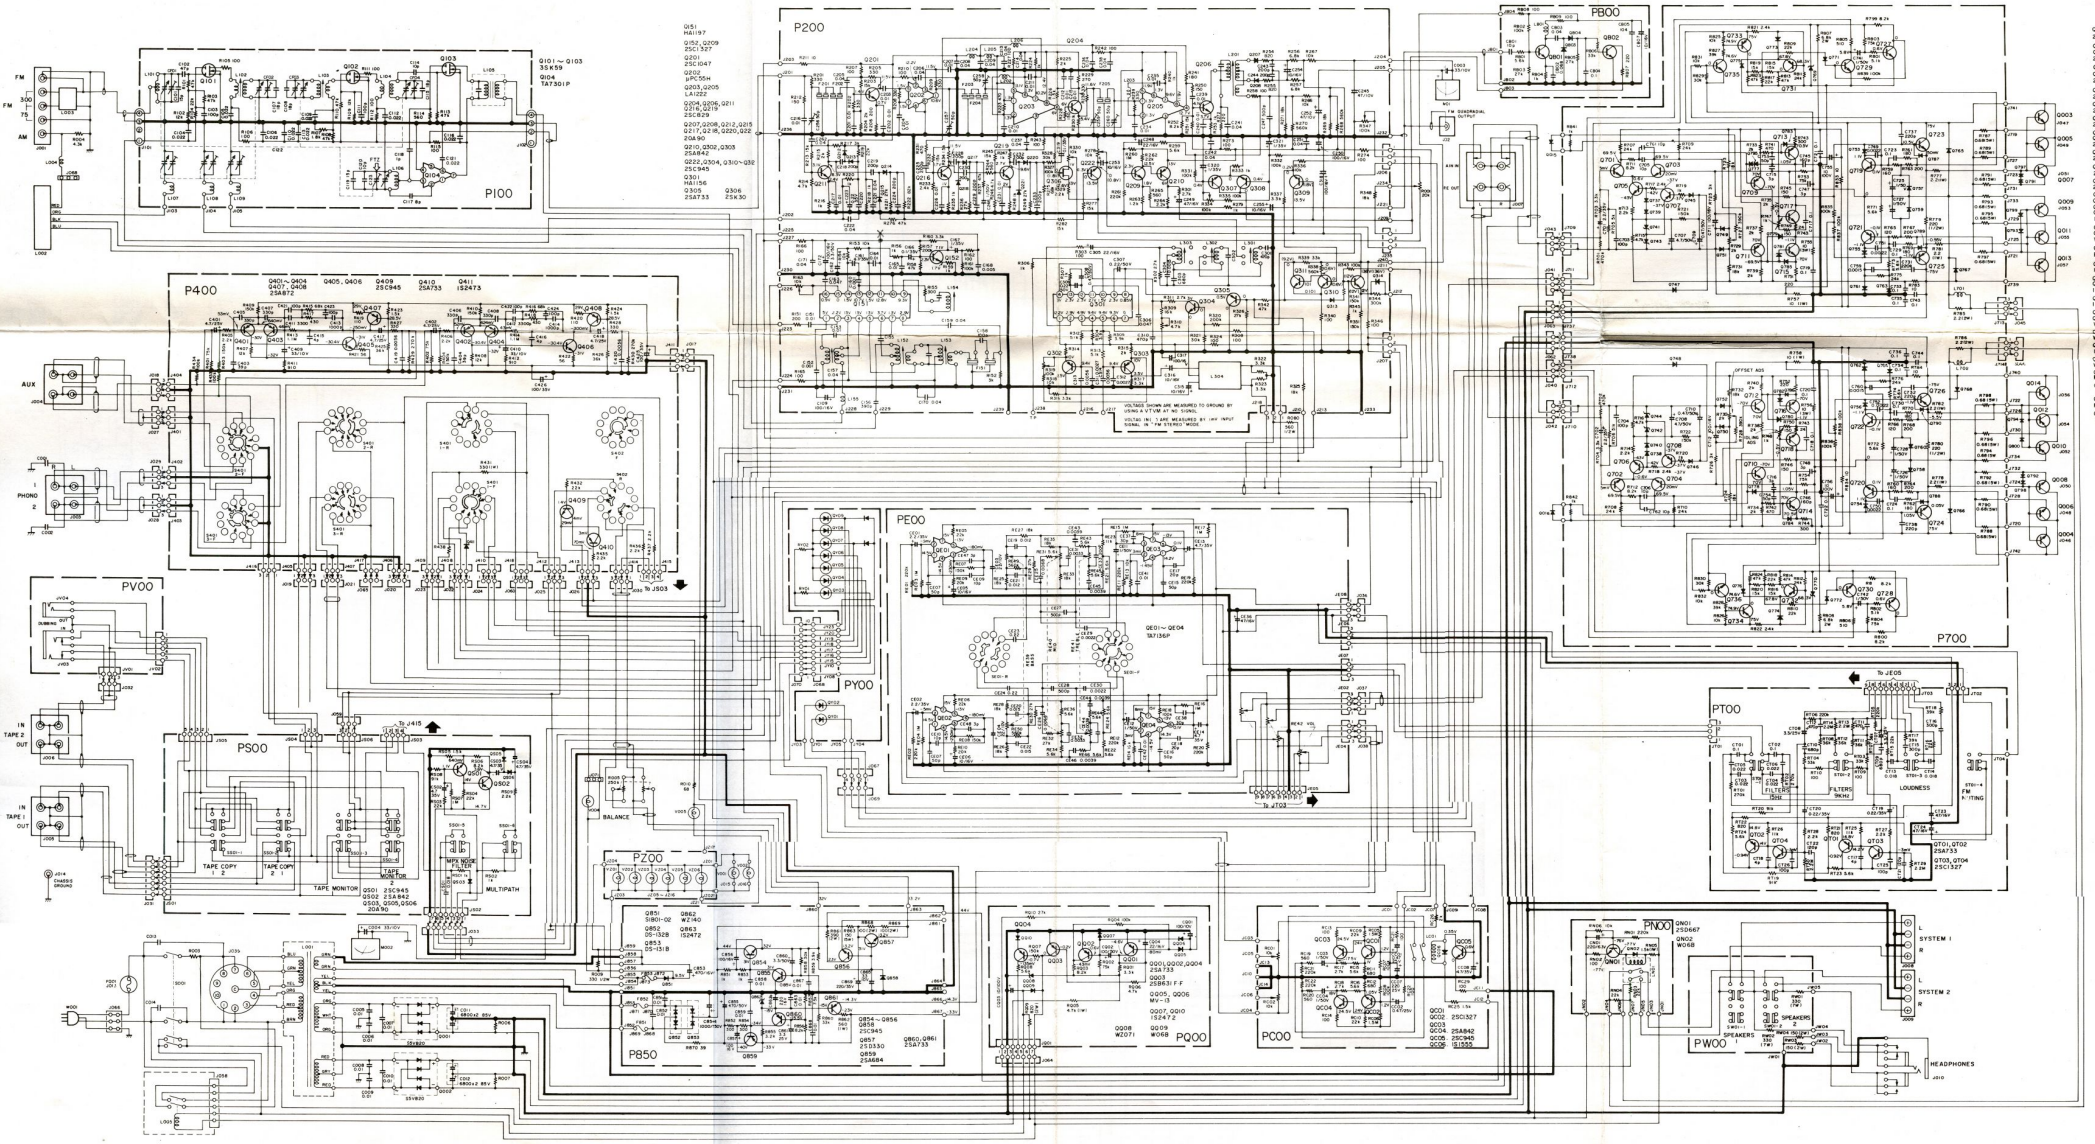
P100
P200
P400
PB00
P700
PV00
PS00
PY00
PE00
PT00
PZ00
P850
PQ00
PC00
PW00
PN00
Q101 ~ Q103
2SC1775A
Q104
TA7301P
Q151
HA1197
Q152, Q209
2SC1327
Q201
2SC1047
Q202
μPC55H
Q203, Q205
LA1222
Q204, Q206, Q211
Q216, Q219
2SC829
Q207, Q208, Q212, Q215
Q217, Q218, Q220, Q222
2SA562
Q210, Q302, Q303
2SA642
Q222, Q304, Q310 ~ Q312
2SC945
Q301
HA1156
Q305
2SA733
Q306
2SA30
Q401 ~ Q404
Q407, Q408
2SA872
Q405, Q406
Q409
2SC945
Q410
2SA733
Q411
1S2473
QE01 ~ QE04
TA7156P
Q501
2SC945
Q502
2SA642
Q503, Q505, Q506
2SA562
Q851
5181-02
Q852
05-1328
Q853
05-1318
Q862
WZ140
Q863
1S2472
Q854 ~ Q856
2SC945
Q857
2SC1030
Q859
2SA684
Q860, Q861
2SA733
Q001 ~ Q004
Q003
2SB631 F F
Q005, Q006
MV-13
Q007, Q010
1S2472
Q008
WZ071
Q009
W068
Q001, Q002, Q004
2SA733
Q003
2SC1327
Q005
2SC945
Q006
2SA842
Q007
2SC945
Q008
1S1555
Q701 ~ Q706
2SC1775A
Q707, Q708
Q721, Q722
2SA733
Q709 ~ Q712
Q731 ~ Q734
2SA879
Q713, Q714
2SA939
Q715, Q716
2SC2011
Q717, Q718
2SC1568
Q719, Q720
Q727 ~ Q730
2SC945
Q723, Q724
2SD610
Q725, Q726
2SB630
Q735, Q736
2SC1573
Q737 ~ Q740
Q746 ~ Q748
Q751 ~ Q760
Q773, Q774
1S2472
Q741, Q742
Q761 ~ Q764
Q763, Q744
EQA01-35H
Q765
1S1472
Q749 ~ Q756
Q771, Q772
1S2473
Q761 ~ Q764
1S2471
Q765 ~ Q768
Q775, Q776
MV2201
Q770, Q780
MV2201
Q777 ~ Q779
1S2471
Q781, Q782
MV-13
Q783 ~ Q786
1S2473
Q787 ~ Q794
MV-13
Q795 ~ Q800
1S2471
QN01
2SD667
QN02
W068
FM
FM 300
75
AM
AUX
PHONO 1
PHONO 2
IN TAPE 2 OUT
IN TAPE 1 OUT
TAPE COPY 1 2
TAPE COPY 2 1
TAPE MONITOR
MPX NOISE FILTER
MULTIPATH
BALANCE
LOUDNESS
FILTERS
SPEAKERS
HEADPHONES
SYSTEM 1
SYSTEM 2
To J415
To JS03
To JE05
To JT03

[FOR EUROPEAN MODEL ONLY]

AUDIO SECTION:

POWER OUTPUT AT 1% DISTORTION . . . . . **260 W**
RATED POWER OUTPUT, 1 kHz . . . . . **260 W**
TOTAL HARMONIC DISTORTION AT RATED POWER OUTPUT, 1 kHz **0.1%**
I.M. DISTORTION AT RATED POWER OUTPUT
(I.H.F. METHOD, 300 Hz AND 10 kHz MIXED 4:1 AT RATED POWER OUTPUT) **0.1%**
POWER BANDWIDTH (½ RATED POWER OUTPUT) . . . . . **5 Hz – 30 kHz**
LOAD IMPEDANCE . . . . . **4 ohms**
POWER OUTPUT AT 1% DISTORTION . . . . . **200 W**
RATED POWER OUTPUT, 1 kHz . . . . . **200 W**
TOTAL HARMONIC DISTORTION AT RATED POWER OUTPUT, 1 kHz **0.05%**
I.M. DISTORTION AT RATED POWER OUTPUT
(I.H.F. METHOD, 300 Hz AND 10 kHz MIXED 4:1 AT RATED POWER OUTPUT **0.1%**
POWER BANDWIDTH (½ RATED POWER, OUTPUT) . . . . . **5 Hz – 30 kHz**
LOAD IMPEDANCE . . . . . **8 ohms**

Damping Factor
8 ohms 45
4 ohms 20
Frequency Response
Phono ±2 dB . . . . . ±0.5 dB
Aux ±1.5 dB . . . . . ±0.5 dB
Main In ±1.5 dB . . . . . ±0.2 dB
Signal-to-Noise Ratio, 1 kHz
Phono . . . . . 50 dB
Aux . . . . . 50 dB
Main In . . . . . 55 dB
Input Terminals
Phono: Input Impedance . . . . . 47 kohms
Input Sensitivity . . . . . 1.8 mV
Overload Margin (Above rated input voltage) . . . 41 dB
Aux: Input Impedance . . . . . 47 kohms
Input Sensitivity . . . . . 180 mV
Overload Margin (Above rated input voltage) . . . 60 dB
Phono Equivalent Input Noise . . . . . 1.0 μV
Phono Dynamic Range (Ratio of input overload to equivalent input noise) . . . . . 106 dB
Phono Input Capacitance . . . . . 100 pF
Channel Balance
Phono 0 – –40 dB . . . . . 2.5 dB
Aux 40 Hz – 16 kHz . . . . . 2.0 dB
Interchannel Crosstalk
Phono 1 kHz . . . . . 43 dB
250 Hz – 10 kHz . . . . . 40 dB
Aux 1 kHz . . . . . 55 dB
250 Hz – 10 kHz . . . . . 45 dB
Intersource Crosstalk (Worst Point)
1 kHz . . . . . 55 dB
250 Hz – 10 kHz . . . . . 43 dB
Output Voltage, 1 kHz
Tape Out . . . . . 775 mV
Pre Out . . . . . 1.5 V
Output Impedance, 1 kHz
Tape Out . . . . . 500 ohms
Pre Out . . . . . 50 ohms
Headphone Jack Load Impedance . . . . . 4 ohms or more (200, 400 ohms acceptable)

FM TUNER SECTION:

Frequency Range . . . . . 87.5 – 108 MHz
Usable Sensitivity 40 kHz Deviation, 98 MHz
Mono, S/N 26 dB . . . . . 1.3 μV
Stereo, S/N 46 dB . . . . . 35 μV
Alternate Channel Selectivity, 98 MHz ±300 kHz . . . . . 72 dB
Image Response Rejection, 98 MHz . . . . . 120 dB
IF Rejection, 98 MHz . . . . . 110 dB
Spurious Response Rejection, 98 MHz . . . . . 110 dB
AM Suppression, 98 MHz . . . . . 65 dB
Signal-to-Noise Ratio, 98 MHz
Unweighted: Mono . . . . . 73 dB
Stereo . . . . . 70 dB
Weighted: Mono . . . . . 78 dB
Stereo . . . . . 71 dB
Pilot Signal & Subcarrier Rejection
19 kHz . . . . . 65 dB
38 kHz . . . . . 75 dB
Total Harmonic Distortion, 98 MHz
Mono 0.08%
Stereo 0.1%
Frequency Response
30 Hz – 15 kHz . . . . . +0.2, –1.0 dB
Separation
250 Hz – 6.3 kHz . . . . . 47 dB
6.3 – 12.5 kHz . . . . . 40 dB
Channel Balance . . . . . 0.1 dB
Output Voltage, 1 kHz . . . . . 910 mV
Output Impedance, 1 kHz . . . . . 600 ohms
Acceptable Load Impedance, 1 kHz . . . . . 47 kohms
Antenna Terminals
Balanced . . . . . 300 ohms
Unbalanced . . . . . 75 ohms

AM TUNER SECTION:

Frequency Range . . . . . 515 – 1650 kHz
Usable Sensitivity (26 dB S/N 30% Mod., 1 MHz) . . . . . 15 μV
Selectivity, 1 MHz ±9 kHz . . . . . 27 dB
Image Rejection, 1 MHz . . . . . 80 dB
IF Rejection, 1 MHz . . . . . 50 dB
Spurious Response Rejection, 1 MHz . . . . . 90 dB
Signal-to-Noise Ratio, 1 MHz . . . . . 55 dB
Frequency Response, 1 MHz ±3 dB . . . . . 40 Hz – 2.3 kHz
Total Harmonic Distortion, 1 MHz 0.4%

GENERAL:

Power Requirements . . . . . 220 V AC, 50 Hz
(E and N versions are featuring an external voltage selector for use on 110/120/240 V. Other versions can be converted by a qualified technician to operate on 110/120/240 V.)
Power Consumption at Rated Output, Both Channels
Operating . . . . . 700 W
Idling Power . . . . . 70 W
Semiconductor Complement
Integrated Circuits 10
Transistors 122
Diodes 106
Field Effect Transistors 4
Dimensions
Panel Width . . . . . 19-1/4" (490 mm)
Panel Height . . . . . 7" (177 mm)
Depth . . . . . 17-1/4" (438 mm)
Weight
Unit alone . . . . . 58.3 lbs (26.5 kg)
Packed for shipment . . . . . 62.7 lbs (28.5 kg)

model 2385

marantz

MARANTZ CO., INC. · P.O. BOX 577 · CHATSWORTH, CALIFORNIA · 91311

•

A WHOLLY-OWNED SUBSIDIARY OF SUPERSCOPE INC., CHATSWORTH, CALIFORNIA · 91311

DOLBY is a trademark of Dolby Laboratories, Inc.

Printed in Japan

221885501 0
3K